Jin Wang, Feng Shu, Ri-qing Chen, Yu-di Cui, Yu Chen, Jun Li, 2016. Adaptive robust beamformer for multi-pair two-way relay networks with imperfect channel state information. *Frontiers of Information Technology & Electronic Engineering*, **17**(3):265-280. http://dx.doi.org/10.1631/FITEE.1500134

Adaptive robust beamformer for multi-pair two-way relay networks with imperfect channel state information

Front Inform Technol Electron Eng

Key words: Multi-pair two-way relay, Adaptive robust beamformer, Channel state information (CSI), Maximum signal-to-interference-and-noise ratio (Max-SINR), Maximum signal-to-leakage-and-noise ratio (Max-SLNR)

Corresponding author: Feng Shu
E-mail: shufeng@njust.edu.cn
ORCID: http://orcid.org/0000-0003-0073-1965

Motivation

- In wideband multi-pair two-way relay networks, the performance of beamforming at a relay station (RS) is intimately related to the accuracy of the channel state information (CSI) available.
- The accuracy of CSI is determined by Doppler spread, delay between beamforming and channel estimation, and density of pilot symbols, including transmit power of pilot symbols.
- Therefore, we develop an adaptive robust Max-SINR plus Max-SLNR beamformer of tracking the channel variation by taking Doppler spread, delay between channel estimation and beamforming, and the density and power of pilot symbols into account.

From IIIForm Technical Electronic Eng

Paper contribution

- We design the transmit and receive beamforming matrices at the RS by making use of Max-SINR and Max-SLNR criteria in the presence of imperfect CSI.

- The coefficients of the Gaussian-Markov CSI error model are modeled as a function of CSI delay, Doppler spread, and signal-to-noise ratio, and can be estimated in real time.

- In accordance with the real-time estimated coefficients of the error model, an adaptive robust Max-SINR plus maximum Max-SLNR beamformer at an RS is proposed to track the variation of CSI error.

Front Inform Technol Electron Eng

System model

- One central relay station (RS) with *N* antennas
- *K* pairs of mobile stations (MSs) with *M* antennas

$$\begin{aligned}\boldsymbol{r}_{k_i}^{uq} =& \beta \left(\boldsymbol{G}_{k_i}^{uq}\right)^{\mathrm{T}} \boldsymbol{W}_{\mathrm{RS}}^{uq} \boldsymbol{H}_{k_{(-i)}}^{uq} \boldsymbol{s}_{k_{(-i)}}^{uq} \\ &+ \beta \left(\boldsymbol{G}_{k_i}^{uq}\right)^{\mathrm{T}} \boldsymbol{W}_{\mathrm{RS}}^{uq} \boldsymbol{H}_{k_i}^{uq} \boldsymbol{s}_{k_i}^{uq} + \boldsymbol{c}_{k_i}^{uq} \\ &+ \beta \left(\boldsymbol{G}_{k_i}^{uq}\right)^{\mathrm{T}} \boldsymbol{W}_{\mathrm{RS}}^{uq} \boldsymbol{z}_{\mathrm{RS}}^{uq} + \boldsymbol{z}_{k_i}^{uq},\end{aligned}$$

Front Inform Technol Electron Eng

CSI error model

$$\widehat{\boldsymbol{H}}_{k_i}^{(u-\Delta u)q} = \rho_{\mathrm{H}} \boldsymbol{H}_{k_i}^{uq} + \sqrt{1-\rho_{\mathrm{H}}^2}\boldsymbol{H}_{\mathrm{e},k_i}^{uq}$$

$$\widehat{\boldsymbol{G}}_{k_i}^{(u-\Delta u)q} = \rho_{\mathrm{G}} \boldsymbol{G}_{k_i}^{uq} + \sqrt{1-\rho_{\mathrm{G}}^2}\boldsymbol{G}_{\mathrm{e},k_i}^{uq},$$

Front Inform Technol Electron Eng

Proposed adaptive robust beamformer

$$\boldsymbol{W}_{\mathrm{RS}}^{uq} = \sum_{k=1}^{K} \sum_{i \in \{a,b\}} \boldsymbol{W}_{\mathrm{t},k_i}^{uq} \left(\boldsymbol{W}_{\mathrm{r},k_{(-i)}}^{uq} \right)^{\mathrm{T}}$$

Max-SLNR

$$\boldsymbol{B}_{k_i} = \frac{\boldsymbol{\Psi}_1}{\sigma_{\mathrm{RS}}^2 \boldsymbol{I}_N + P_{\mathrm{RS}} N^{-1} \left(\boldsymbol{\Psi}_2 + \boldsymbol{\Psi}_3 \right)}$$

Max-SINR

$$\boldsymbol{A}_{k_{(-i)}} = \frac{\boldsymbol{\Phi}_1^{\mathrm{T}}}{\sigma_{\mathrm{RS}}^2 \boldsymbol{I}_N + P_{\mathrm{MS}} M^{-1} \left(\boldsymbol{\Phi}_2 + \boldsymbol{\Phi}_3 \right)^{\mathrm{T}}}$$

Front Inform Technol Electron Eng

Real-time estimation of ρ

$$\rho^{u}_{\mathrm{H},k_i} = \rho^{u\mathrm{d}}_{\mathrm{H},k_i}\rho^{u\mathrm{e}}_{\mathrm{H},k_i}$$

effect of Doppler spread


$$\rho^{u\mathrm{d}}_{\mathrm{H},k_i} = \frac{\Re_{\mathrm{HH},k_i}(\Delta u, 0)}{\Re_{\mathrm{HH},k_i}(0,0)}$$

effect of channel estimation error


$$\rho^{u\mathrm{e}}_{\mathrm{H},k_i} = \frac{\mathrm{SNR}^{u\mathrm{p}}_{\mathrm{H},k_i}}{1+\mathrm{SNR}^{u\mathrm{p}}_{\mathrm{H},k_i}}$$

Front Inform Technol Electron Eng


Major results

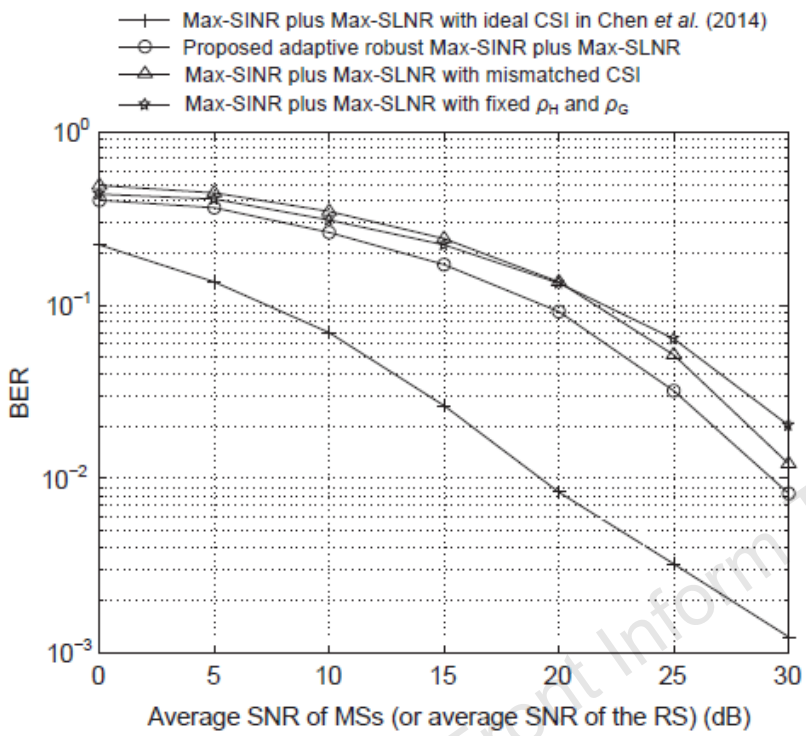

α=0.5

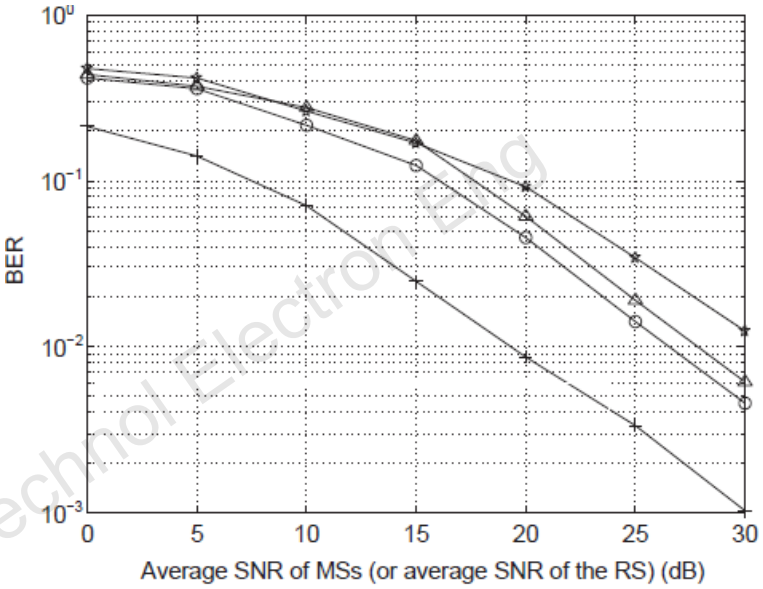

α=1.0

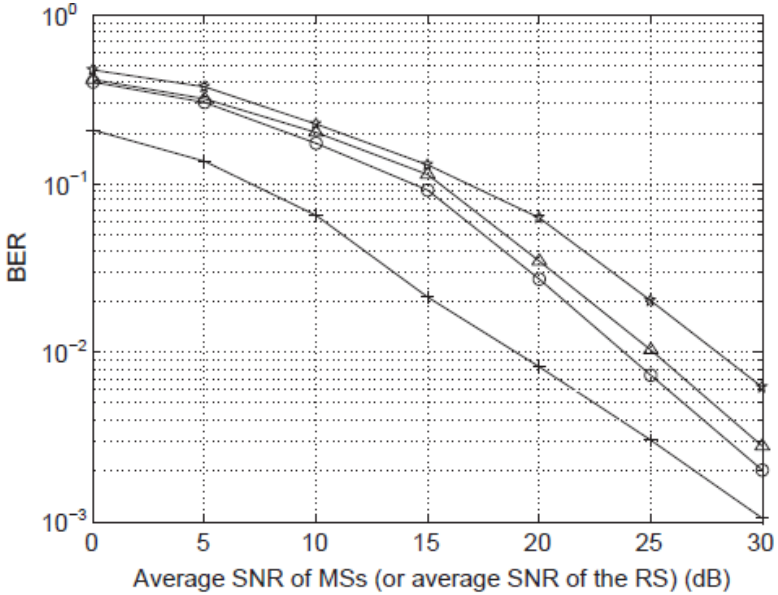



α=2.0

Curves of BER versus SNR of the proposed adaptive robust beamformer and existing non-adaptive ones ($\Delta m f_d T_s$= 0.01)

Front Inform Technol Electron Eng

Major results (Cont'd)

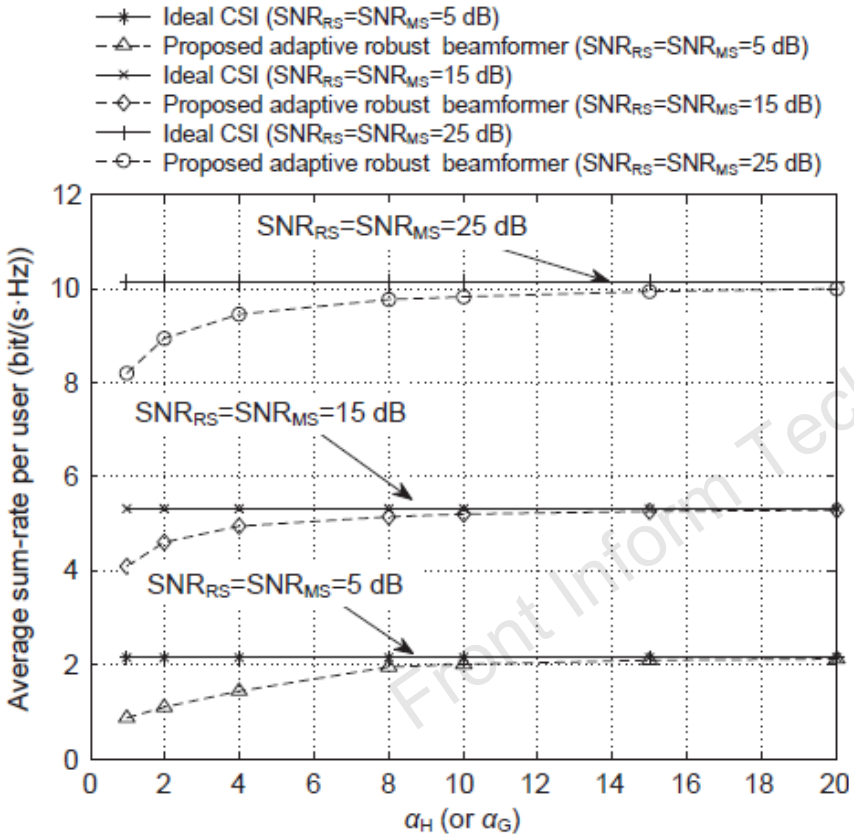

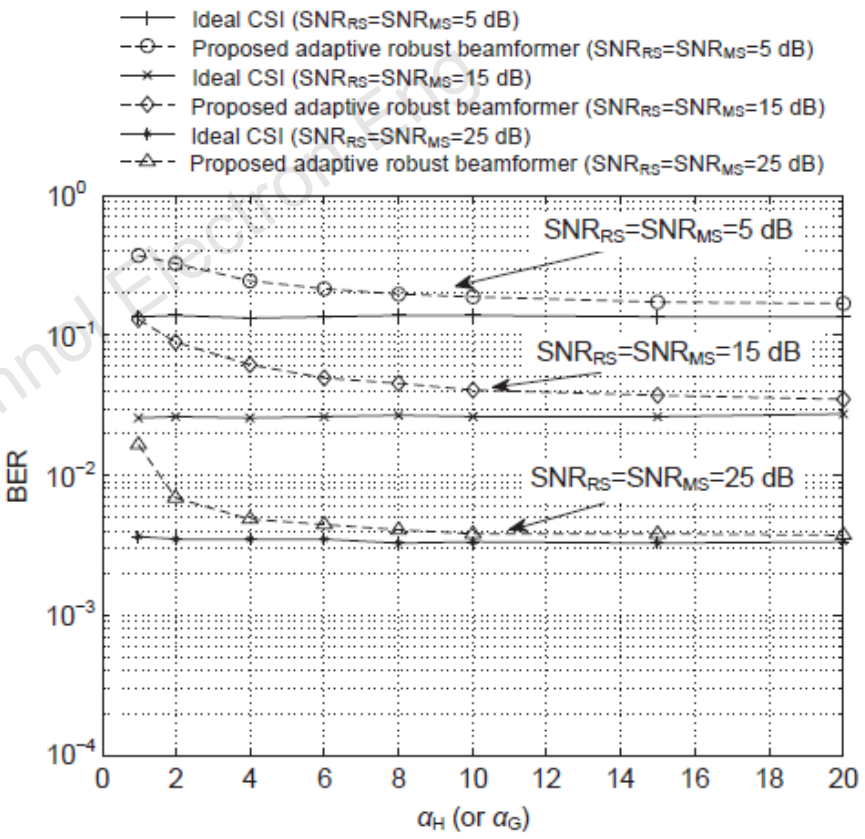

Front Inform Technol Electron Eng

Curves of sum-rate and BER versus α of the proposed adaptive robust beamformer at $SNR_{RS}=SNR_{MS}$=5 dB, 15 dB, 25 dB ($\Delta m f_d T_s$= 0.01)

Conclusions

- By real-time estimation of Doppler spread and SNR in the channel, an adaptive robust Max-SINR plus Max-SLNR beamformer at an RS is proposed to take into account some uncertainty or possible variation in the channel matrix.

- From simulation results and analysis, we find that the proposed robust method can adaptively track channel variation and performs much better than existing robust and non-robust Max-SINR plus Max-SLNR non-adaptive schemes.

Front Inform Technol Electron Eng