

Liangjie QIU, Xiuping LI, Zihang QI, Wenyu ZHAO, Yuhan HUANG, 2023.
Wideband circular-polarized transmitarray for generating a high-purity vortex
beam. *Frontiers of Information Technology & Electronic Engineering*, 24(6):927-
934. <https://doi.org/10.1631/FITEE.2200539>

Wideband circular-polarized transmitarray for generating a high-purity vortex beam

Key words: Orbital angular momentum (OAM); Vortex beam;
Transmitarray; Wideband; High purity

Liangjie QIU

E-mail: qiu_liang_jie@163.com

 ORCID: <https://orcid.org/0009-0004-2820-4221>

Approaches of OAM generation

- Because orbital angular momentum (OAM) has the ability to improve channel capacity, various approaches for generating vortex beams in microwave fields have been studied and reported.

Approaches	Advantages	Disadvantages
OAM patch antenna	The OAM mode purity of a generated vortex beam is high	The single-feed patch antenna faces the shortcomings of low gain and narrow bandwidth, whereas the feed network of the multiple-feed is complex
Uniform circular array	The OAM mode can be flexibly controlled	The limited space between the elements dramatically increases the complexity of the feed network
Metasurface	The metasurface has several advantages including simple feed and high degree of design freedom	There is an effect of feed-blockage in reflectarray

Motivation

1. Adopting a honeycomb arrangement to optimize the stability of the oblique incidence of the element and enhance its phase-shifting ability.
2. The honeycomb arrangement makes the transmitarray (TA) more compact, which improves phase compensation accuracy and achieves higher OAM mode purity.
3. The elements adopt a multi-layer coupling structure to achieve multi-resonance and wideband operation.

1) Wideband circular-polarized element design

- ❑ The element adopts **the element rotation principle** based on the Pancharatnam–Berry phase mechanism
- ❑ The elements adopt a multi-layer coupling structure to achieve multi-resonance and wideband operation

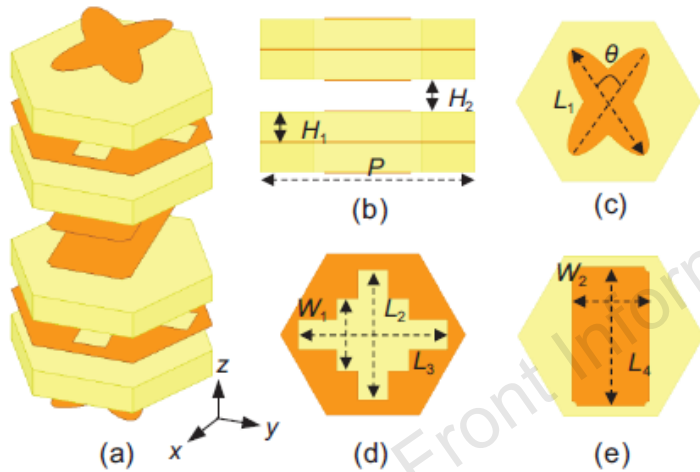


Fig. 1 Geometry of the proposed transmitarray (TA) element: (a) exploded view; (b) front view; (c) top view of the X-shaped patch; (d) top view of the hexagonal patch; (e) top view of the rectangular patch. Yellow denotes the dielectric layers and orange denotes the metal layers

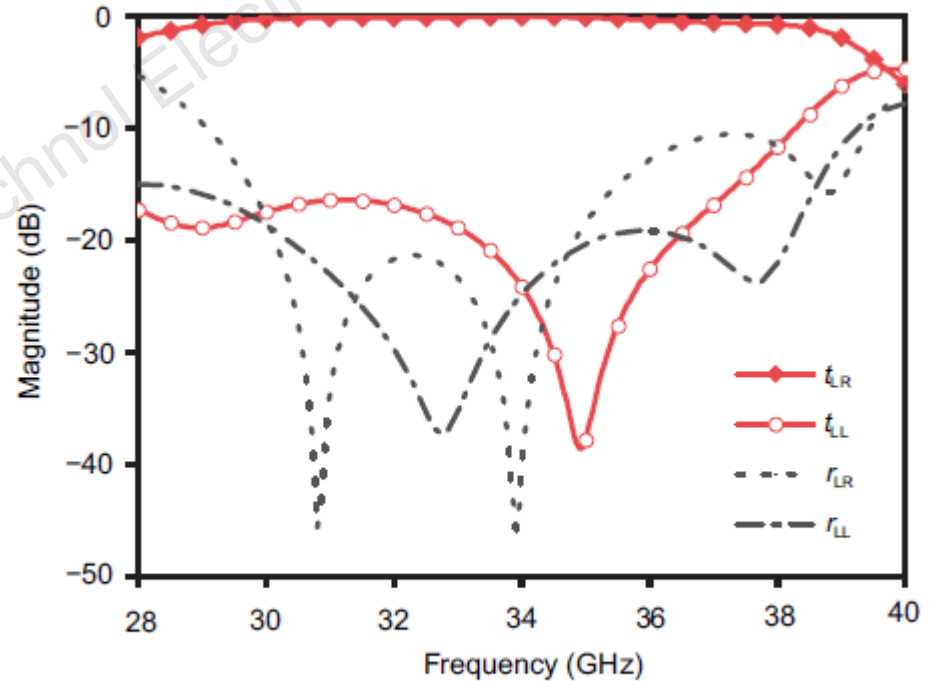


Fig. 3 Magnitude of transmission and reflection coefficients versus frequency under the normal incidence

1) Wideband circular-polarized element design

- The phase linearity of the honeycomb element is significantly better than that of the square

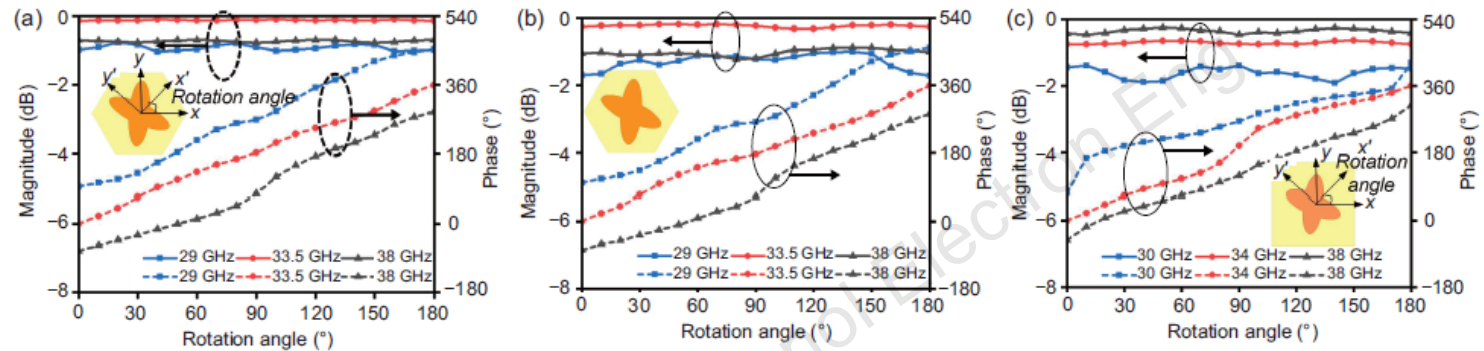


Fig. 4 Magnitude and phase of co-polarized transmission coefficient versus rotation angle of the element at different frequencies: (a) under normal incidence; (b) oblique incidence angle=30°; (c) under normal incidence

- The proposed element achieves a good balance between **low profile** and **wide band**

Table 1 Comparison with other reported transmitarray (TA) elements based on the element rotation principle

Reference	f_0 (GHz)	Number of dielectric layers	Profile ($\times \lambda_0$)	Transmission bandwidth*
Shahmirzadi et al. (2021)	34	2	0.18	3.5% (> -1 dB)
Veljovic and Skrivervik (2020)	24.6	2	0.13	6.0% (> -1 dB)
Jiang et al. (2018)	30	2	0.31	9.1% (> -1.9 dB)
Zhang XL et al. (2020)	20	2	0.21	10.0% (> -2.7 dB)
Zhang FH et al. (2020)	10	3	0.14	17.5% (> -3 dB)
Ran et al. (2020)	15	4	0.66	25.0% (> -1 dB)
This work	33.5	4	0.28	28.4% (> -1 dB)

* Transmission bandwidth is the frequency range in which the magnitude of the co-polarized transmission coefficient is greater than the value in brackets

2) Vortex beam transmitarray design

- When the effective radiation areas are the same and the periods of the elements are both $0.4\lambda_0$, the honeycomb TA can accommodate more elements compared with the square TA. Thus, the phase compensation accuracy is improved and higher mode purity is obtained.

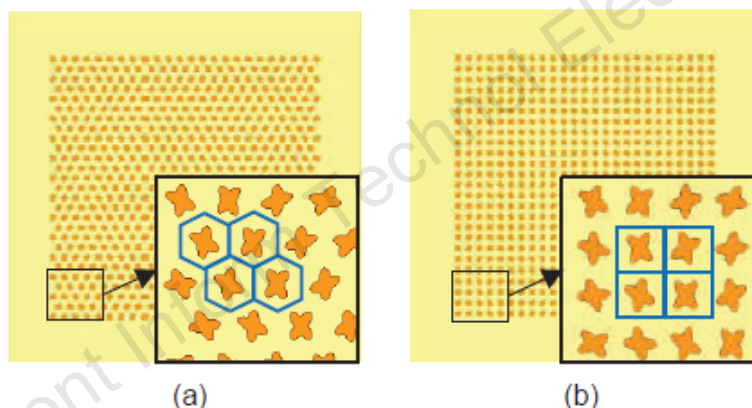


Fig. 5 Schematic of transmitarray (TA) using different arrangement methods: (a) honeycomb; (b) square

Table 2 Comparison with other transmitarrays (TAs) based on different arrangement methods

Arrangement method	Number of elements	Mode purity	OAM bandwidth (%)
Square	625	>0.88	23.5
Honeycomb	941	>0.93	28.4

Aperture size: $10\lambda_0 \times 10\lambda_0$. OAM: orbital angular momentum

3) Results and discussion

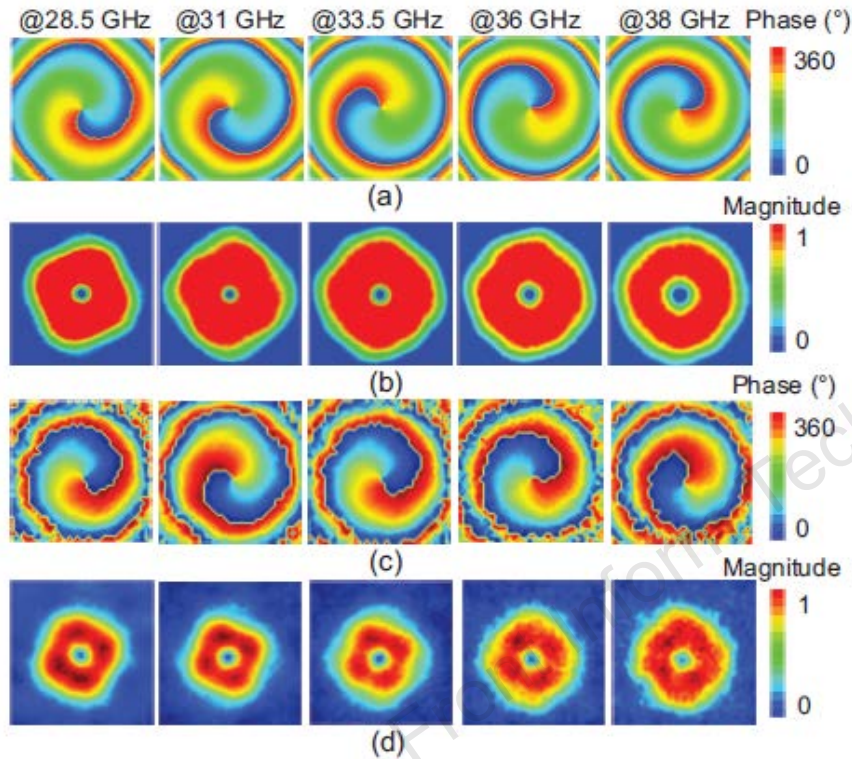


Fig. 7 Results of E-field phase and magnitude distributions in the near field for $l=-1$ at different frequencies: (a) simulated phase; (b) simulated magnitude; (c) measured phase; (d) measured magnitude

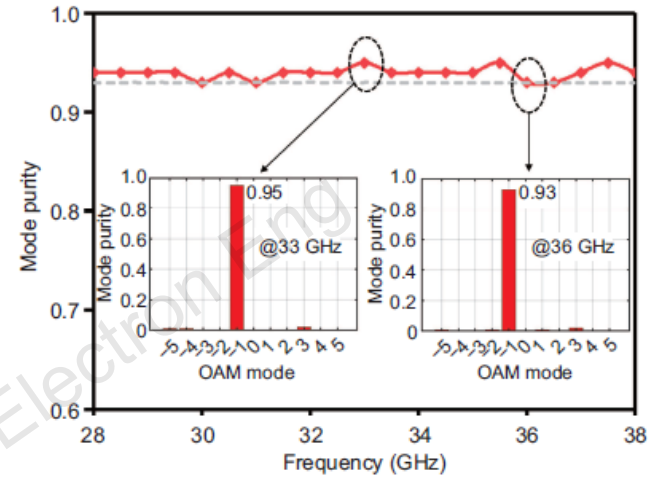


Fig. 8 Mode purity of the vortex beam versus frequency (OAM: orbital angular momentum)

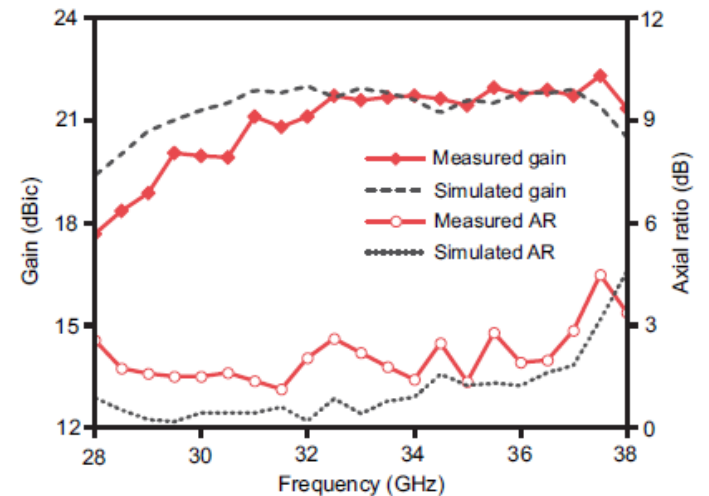


Fig. 9 Simulation and measurement results of gain and axial ratio (AR)

3) Results and discussion

□ The honeycomb-arranged TA using subwavelength elements achieves more accurate phase compensation and **higher mode purity in a wide band**.

Table 3 Comparison with other reported orbital angular momentum (OAM) antennas

Reference	Type	f_0 (GHz)	Period of element ($\times \lambda_0$)	Aperture ($\times \lambda_0^2$)	Mode purity	Mode purity bandwidth (%) [*]
Zhang FH et al. (2019)	TA	10	0.33	5 \times 5	>0.87	20.0
Bi et al. (2018)	RA	63	0.63	31 \times 31	>0.79	17.1
Lin et al. (2020)	RA	23	0.77	15 \times 15	>0.75	43.4
Wu GB et al. (2020)	TA	300	0.50	13 \times 13	>0.40	31.3
This work	TA	33.5	0.40	10\times10	>0.93	28.4

^{*} Mode purity bandwidth refers to the frequency range in which the OAM mode purity is greater than the value of the previous column. TA: transmitarray; RA: reflectarray

References

- [1] Shahmirzadi AV, Badamchi Z, Badamchi B, et al., 2021. Generating concentrically embedded spatially divided OAM carrying vortex beams using transmitarrays. *IEEE Trans Antenn Propag*, 69(12):8436-8448.
- [2] Veljovic MJ, Skrivervik AK, 2020. Circularly polarized transmitarray antenna for cubesat intersatellite links in K-band. *IEEE Antenn Wirel Propag Lett*, 19(10):1749-1753.
- [3] Jiang ZH, Lei K, Hong W, et al., 2018. Highly efficient broadband multiplexed millimeter-wave vortices from metasurface-enabled transmit-arrays of subwavelength thickness. *Phys Rev Appl*, 9(6):064009.
- [4] Zhang XL, Yang F, Xu SH, et al., 2020. Dual-layer transmitarray antenna with high transmission efficiency. *IEEE Trans Antenn Propag*, 68(8):6003-6012.
- [5] Zhang FH, Yang GM, Jin YQ, 2020. Low-profile circularly polarized transmitarray for wide-angle beam control with a third-order meta-FSS. *IEEE Trans Antenn Propag*, 68(5):3586-3597.
- [6] Ran YZ, Cai T, Shi LH, et al., 2020. High-performance transmissive broadband vortex beam generator based on Pancharatnam–Berry metasurface. *IEEE Access*, 8:111802-111810.
- [7] Zhang FH, Song Q, Yang GM, et al., 2019. Generation of wideband vortex beam with different OAM modes using third-order meta-frequency selective surface. *Opt Expr*, 27(24):34864-34875.
- [8] Bi F, Ba ZL, Wang X, 2018. Metasurface-based broadband orbital angular momentum generator in millimeter wave region. *Opt Expr*, 26(20):25693-25705.
- [9] Lin ZS, Ba ZL, Wang X, 2020. Broadband high-efficiency electromagnetic orbital angular momentum beam generation based on a dielectric metasurface. *IEEE Photon J*, 12(3):4600611.
- [10] Wu GB, Chan KF, Qu SW, et al., 2020. Orbital angular momentum (OAM) mode-reconfigurable discrete dielectric lens operating at 300 GHz. *IEEE Trans Terahertz Sci Technol*, 10(5):480-489.



Liangjie QIU received the B.S. degree from Beijing University of Posts and Telecommunications, Beijing, China, in 2020. She is currently pursuing the M.S. degree in electronic science and technology with Beijing University of Posts and Telecommunications, Beijing, China. Her current research interests include orbital angular momentum antennas and millimeter-wave antennas.



Zihang QI received the B.Eng. degree in electronic and information engineering from China Three Gorges University, Yichang, China, in 2013, and the Ph.D. degree in electronic science and technology from Beijing University of Posts and Telecommunications, Beijing, China, in 2019. He is currently an associate research fellow with Beijing University of Posts and Telecommunications. His current research interests include OAM antennas, millimeter-wave/THz antennas and microwave filters. Dr. QI was a recipient of the 2018 National Scholarship of China for Doctoral Students.



Xiuping LI (M'05–SM'07) received the B.S. degree from Shandong University in 1996, and the Ph.D. degree from Beijing Institute of Technology in 2001. From 2001 to 2003, she joined in Positioning and Wireless Technology Center, Nanyang Technological University in Singapore, where she was a research fellow and involved in the research and development of RFID system. In 2003, she was a research professor in Yonsei University, Seoul, South Korea. Since 2004, she joined Beijing University of Posts and Telecommunications as an associate professor, and promoted to professor in 2009. She has been selected into the New Century Excellent Talents Support Plan in National Ministry of Education, the Beijing Science and Technology Nova Support Plan, in 2007 and 2008 respectively. She won the second prize of the Progress in Science and Technology of China Institute of Communications and the Excellent Achievements in Scientific Research of Colleges and Universities in 2015 and 2018, respectively. She is the author of four books, and over 100 journal and conference papers. She is also awarded more than 20 PRC patents. Her current research interests include millimeter-wave antennas, THz antennas, RFID systems, and MMIC design.