Ruofeng YU, Chenyang LUO, Mengdi BAI, Shangqu YAN, Wei YANG, Yaowen FU, 2025. Waveform design based on mutual information upper bound for joint detection and estimation. *Frontiers of Information Technology & Electronic Engineering*, 26(11):2324-2337. https://doi.org/10.1631/FITEE.2500276

Front Inform Technol Electron Eng

Waveform design based on mutual information upper bound for joint detection and estimation

Key words: Radar waveform design; Mutual information upper bound; Target detection; Parameter estimation; Constant modulus constraint

Yaowen FU
E-mail: fuyaowen@nudt.edu.cn
ORCID: https://orcid.org/0000-0001-7081-266X

Motivation

1. In practice, detection and estimation are interdependent, motivating joint optimization.
2. Multi-objective formulations provide partial solutions, while learning-based approaches suffer from complexity and generalization issues.
3. Information-theoretic designs have been explored, e.g., a two-stage scheme using mutual information (MI) and Kullback–Leibler (KL) divergence, yet a unified foundation remains lacking.

Front Inform Technol Electron Eng

Main idea

1. Unified variational framework: Joint detection-estimation waveform design is formulated via mutual information upper bound (MIUB) maximization, unifying MI- and KL-based criteria.

2. Flexible statistical modeling: Gaussian mixture distributions (GMDs) are adopted for target and clutter, combining fidelity with analytical tractability.

3. Phase-coded dream optimization algorithm (PC-DOA): A constant modulus synthesis algorithm with hybrid initialization and adaptive dynamics is developed to enhance convergence and solution quality.

Front Inform Technol Electron Eng

Method

1. The received signal y is modeled by the following binary hypothesis test.

$$\begin{cases} \mathcal{H}_0: & y = w, \\ \mathcal{H}_1: & y = Sx + w, \end{cases}$$

The corresponding likelihoods of y under two hypothesis:

$$p_0(y) \triangleq p(y \mid \mathcal{H}_0) = \sum_{k=1}^{K} \alpha_k \mathcal{CN}(y;\ 0,\ R_k),$$

$$p_1(y) \triangleq p(y \mid \mathcal{H}_1) = \sum_{\ell=1}^{L} \gamma_\ell \mathcal{CN}(y;\ 0,\ \Sigma_\ell),$$

The constant modulus constraint:

$$|s_n| = c = \sqrt{E_s / N}, \quad n = 1, 2, \ldots, N,$$

MIUB decomposition:

$$\mathrm{MIUB}(s) = \underbrace{I(x;y)}_{\mathrm{E}(s)} + \underbrace{\mathcal{D}_{\mathrm{KL}}\big(p_1(y) \,\|\, p_0(y)\big)}_{\mathrm{D}(s)},$$

From Inform Technol Electron Eng

Method (Cont'd)

2. The exact evaluation of MIUB under GMD likelihoods is generally intractable. Tractable approximation strategies: to circumvent this computational challenge, we adopt the following tractable approximation strategies.

- MI approximation (Lemma 2): the MI term can be approximated as $\overline{\mathsf{E}}(s) = \Xi\left(\{\alpha_k,\ R_k\}_{k=1}^{K}\right) - \Xi\left(\{\gamma_\ell,\ \Sigma_\ell\}_{\ell=1}^{L}\right),$
- KL divergence approximation (Lemma 3): the KL divergence term admits the approximation $\overline{\mathsf{D}}(s) = \sum_{\ell=1}^{L} \gamma_\ell \left[\ln \frac{\gamma_\ell}{\alpha_{k^\star(\ell)}} + \mathcal{L}(\Sigma_\ell,\ R_{k^\star(\ell)})\right],$

Final optimization problem (P1):

$$(\mathcal{P}_1): \begin{array}{ll} \max\limits_{s} & F(s) \triangleq \overline{\mathsf{E}}(s) + \overline{\mathsf{D}}(s) \\ \text{s.t.} & |\, s_n \,| = c, \quad n = 1, 2, \ldots, N \end{array}$$

Front Inform Technol Electron Eng

Method (Cont'd)

3. We propose the PC-DOA, a metaheuristic specifically designed for MIUB-based waveform design under constant modulus constraints.

Phase-coded representation: $s(\theta) = c \cdot [e^{j\theta_1}, e^{j\theta_2}, ..., e^{j\theta_N}]^T$.

Hybrid initialization strategy:

- LFM-inspired initialization: $[\theta^0_{\mathrm{LFM},i}]_n = \Psi\left(\beta_i \pi \frac{(n-1)^2}{N-1} + \Delta_{i,n}\right)$,
- Chaotic initialization: $\rho_n^k = 4\rho_n^{k-1}(1-\rho_n^{k-1})$, $[\theta^0_{\mathrm{chaos},i}]_n = \Psi\left(-\pi + 2\pi\rho_n^{K_{\mathrm{chaos}}}\right)$.
- Random initialization: $[\theta^0_{\mathrm{rand},i}]_n \sim \mathcal{U}(-\pi, \pi)$.

Exploration and exploitation:

- Exploration phase: $\theta_g^{\mathrm{best}} = \arg\max_{\theta \in \mathcal{G}_g} f(\theta)$.
- Exploitation phase: $[\theta_{\mathrm{new}}]_n = \Psi\left([\theta^{\mathrm{global}}]_n + \eta(t) \cdot \Delta_n\right), \quad n \in \mathcal{I}$.

Front Inform Technol Electron Eng

Method (Cont'd)

4. The PC-DOA algorithm initializes a population using a hybrid strategy and finds the initial best solution θ^*. It then iterates T times, splitting the search into two phases: first, a broad exploration phase, followed by an exploitation phase that focuses the search around the current θ^* In each iteration, it evaluates the new candidates, selects the next generation, and updates θ^* if a better solution is found. Finally, it computes and returns the optimal waveform s^* based on the final θ^*

Algorithm 1 Phase-coded dream optimization algorithm

Input: Objective function $F : \mathcal{M} \to \mathbb{R}$, waveform parameters $\{N, c\}$, and algorithm parameters $\{N_\mathrm{p}, T, G, \eta, \alpha\}$

Output: Optimal phase vector $\boldsymbol{\theta}^*$ and waveform $\boldsymbol{s}^*$

Initialize Population $\mathcal{P}_0 = \{\boldsymbol{\theta}_1^0, \boldsymbol{\theta}_2^0, \ldots, \boldsymbol{\theta}_{N_\mathrm{p}}^0\}$ via hybrid strategy Eqs. (21)–(24), fitness $f(\boldsymbol{\theta}) \leftarrow F(\boldsymbol{s}(\boldsymbol{\theta}))$ for all $\boldsymbol{\theta} \in \mathcal{P}_0$, global best $\boldsymbol{\theta}^* \leftarrow \arg\max_{\boldsymbol{\theta} \in \mathcal{P}_0} f(\boldsymbol{\theta})$, and $f^* \leftarrow f(\boldsymbol{\theta}^*)$
for $t = 1$ to T **do**
  Initialize $\mathcal{P}_\mathrm{candidate} \leftarrow \varnothing$
  // $\mathcal{P}_\mathrm{candidate}$ denotes the candidate population
  if $t \le \alpha T$ **then**
    Partition $\mathcal{P}_{t-1}$ into G subgroups
    for each $\boldsymbol{\theta}_\mathrm{old} \in \mathcal{P}_{t-1}$ **do**
      Generate $\boldsymbol{\theta}_\mathrm{new}$ from $\boldsymbol{\theta}_\mathrm{old}$ via Eq. (28)
      $\mathcal{P}_\mathrm{candidate} \leftarrow \mathcal{P}_\mathrm{candidate} \cup \{\boldsymbol{\theta}_\mathrm{new}\}$
    end for
  else
    for each $\boldsymbol{\theta}_\mathrm{old} \in \mathcal{P}_{t-1}$ **do**
      Generate $\boldsymbol{\theta}_\mathrm{new}$ guided by $\boldsymbol{\theta}^*$ via Eq. (30)
      $\mathcal{P}_\mathrm{candidate} \leftarrow \mathcal{P}_\mathrm{candidate} \cup \{\boldsymbol{\theta}_\mathrm{new}\}$
    end for
  end if
  Evaluate fitness $f(\boldsymbol{\theta})$ for all $\boldsymbol{\theta} \in \mathcal{P}_\mathrm{candidate}$
  Select next-generation population $\mathcal{P}_t$ from $\mathcal{P}_{t-1} \cup \mathcal{P}_\mathrm{candidate}$
  if $\max_{\boldsymbol{\theta} \in \mathcal{P}_t} f(\boldsymbol{\theta}) > f^*$ **then**
    $\boldsymbol{\theta}^* \leftarrow \arg\max_{\boldsymbol{\theta} \in \mathcal{P}_t} f(\boldsymbol{\theta})$
    $f^* \leftarrow f(\boldsymbol{\theta}^*)$
  end if
end for
Compute optimal waveform $\boldsymbol{s}^* \leftarrow c \cdot \exp(\mathrm{j}\boldsymbol{\theta}^*)$
Return $\boldsymbol{\theta}^*$ and $\boldsymbol{s}^*$

Fronthofer Technical Electronic Eng

Major results

Comparison of optimization objectives

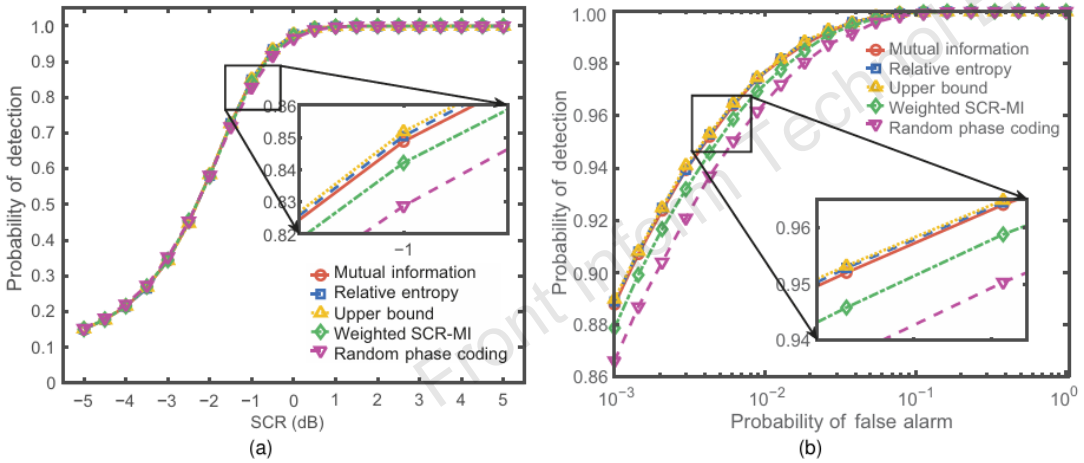


Fig. 2 Detection performance of waveforms using different criteria: (a) detection probability P_{D} vs. SCR ($P_{\mathrm{FA}} = 10^{-2}$); (b) ROC curves ($P_{\mathrm{D}}$ vs. P_{FA}) at SCR = 0 dB


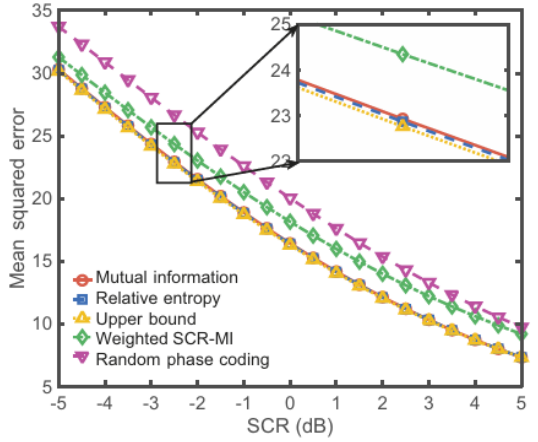


Fig. 3 MSE of TIR estimation vs. SCR for waveforms using different criteria

Front Inform Technol Electron Eng

Major results (Cont'd)

Comparison of optimization objectives

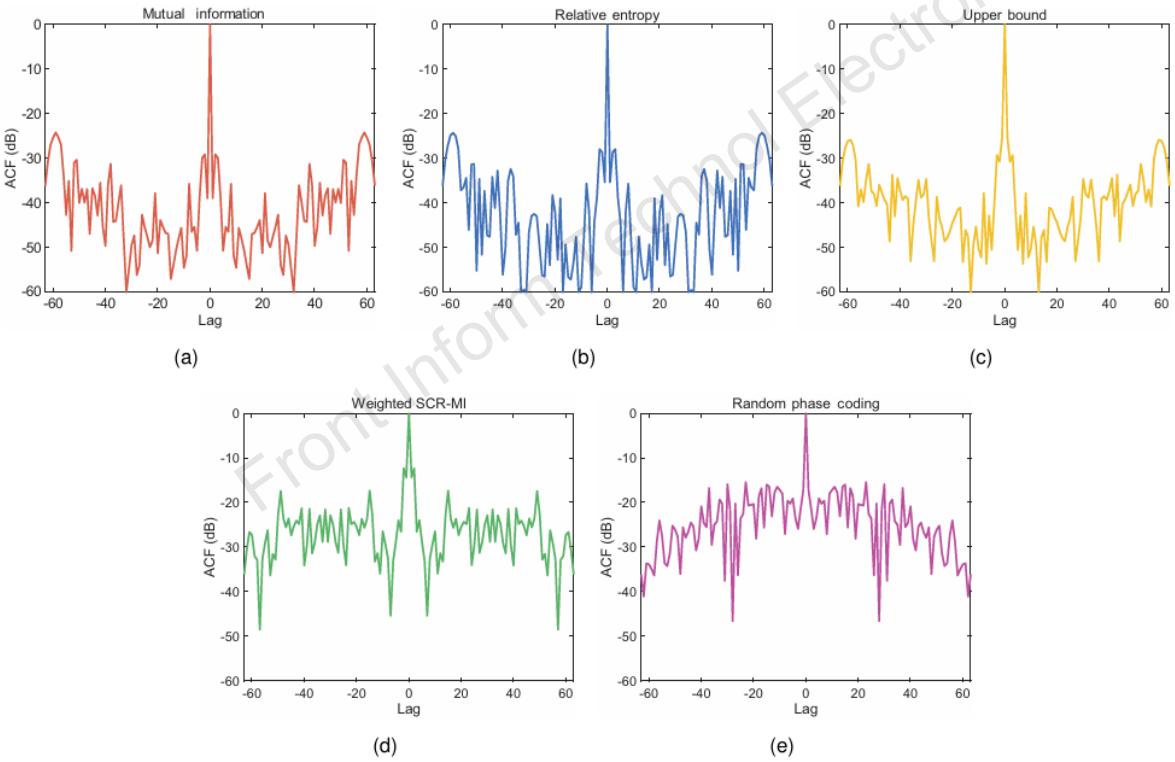

Front Inform Technol Electron Eng

Fig. 4 Autocorrelation functions of waveforms using different criteria: (a) MI; (b) RE; (c) MIUB; (d) WSM; (e) RPC

Major results (Cont'd)

Comparison of optimization objectives

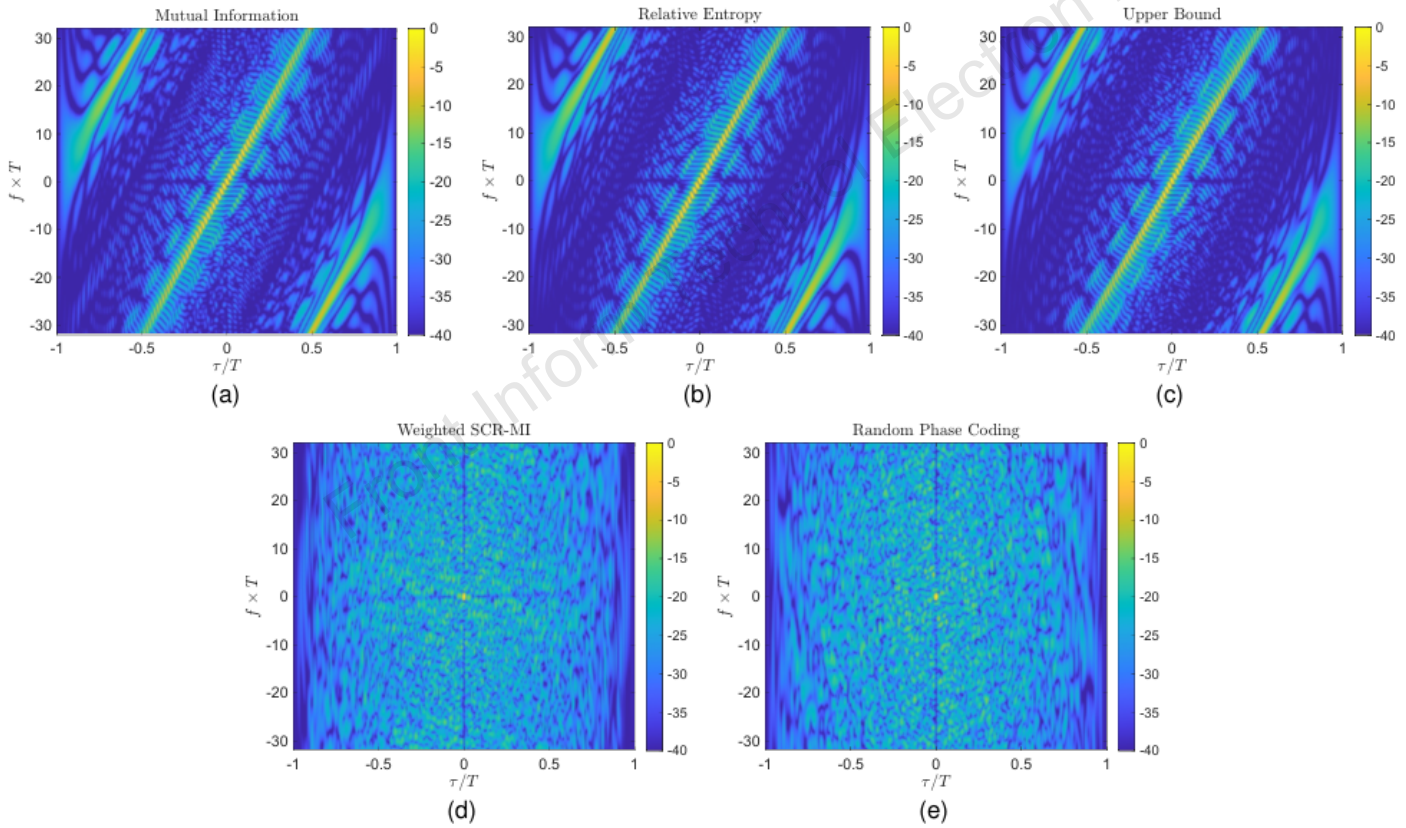


Fig. 5 Ambiguity functions of waveforms using different criteria: (a) MI; (b) RE; (c) MIUB; (d) WSM; (e) RPC

Major results (Cont'd)

Comparison of optimization algorithms

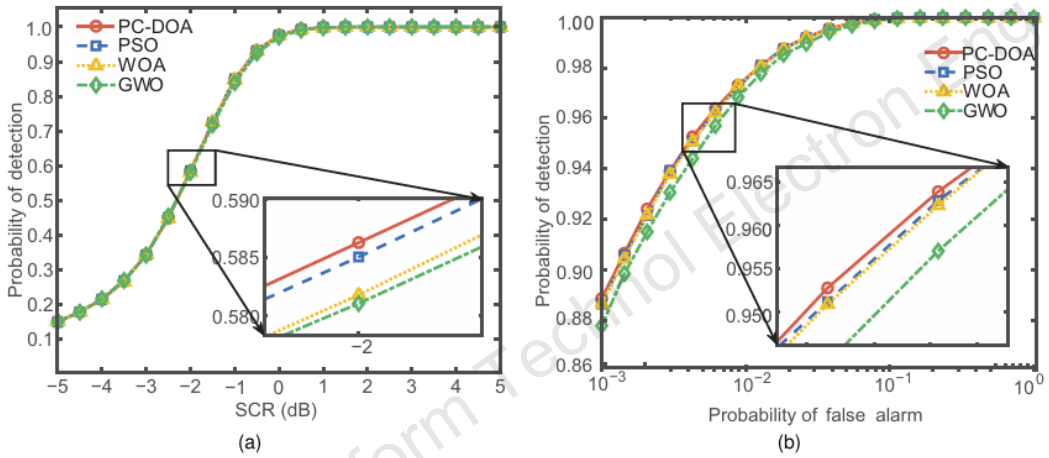


Fig. 6 Detection performance of waveforms using different optimization algorithms: (a) detection probability vs. SCR ($P_{FA} = 10^{-2}$); (b) ROC curves (P_D vs. P_{FA}) at SCR = 0 dB

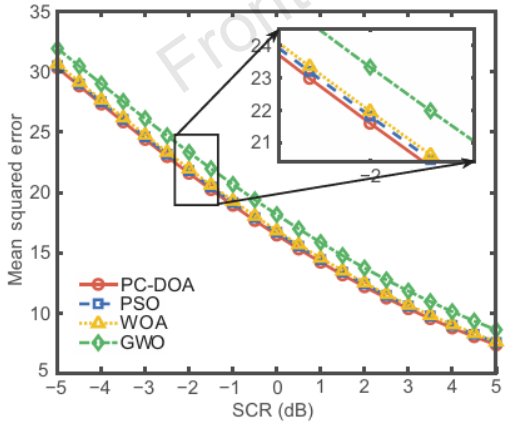


Fig. 7 MSE of TIR estimation vs. SCR of waveforı using different optimization algorithms

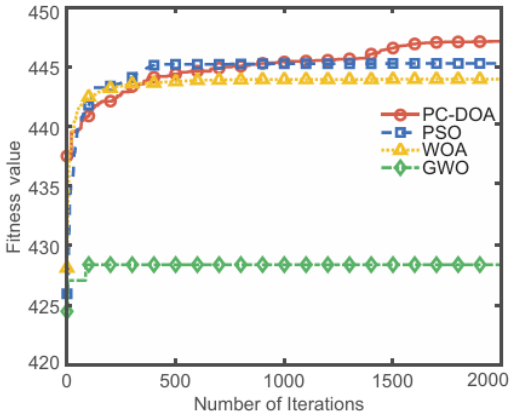


Fig. 8 Convergence of best fitness $F(s)$ optimized using different optimization algorithms

Conclusions

1. This work presents a unified information-theoretic framework for constant modulus radar waveform design, jointly optimizing detection and estimation via an MIUB under Gaussian mixture models.

2. To address the ensuing nonconvex optimization, we propose PC-DOA, which leverages hybrid initialization and adaptive bi-phase search on the complex circle manifold.

3. Numerical evaluations confirm that MIUB-based designs outperform conventional baselines, offering superior detection-estimation trade-offs and desirable ambiguity function properties, thereby establishing a principled foundation for future extensions.

Front Inform Technol Electron Eng



Ruofeng Yu received his M.S. degree from the National University of Defense Technology, Changsha, China, in 2020, where he is pursuing the Ph.D. degree. His research interests include information fusion and Bayesian tracking processing.



Yaowen Fu received his B.S. and Ph.D. degrees from the National University of Defense Technology (NUDT), Changsha, China, in 1997 and 2003, respectively. He is currently a Professor with the College of Electronic Science and Technology, NUDT. His research interests include radar imaging, moving-target detection, and estimation.

Front Inform Technol Electron Eng