



# Robust distributed model predictive consensus of discrete-time multi-agent systems: a self-triggered approach\*

Jiaqi LI<sup>1</sup>, Qingling WANG<sup>2</sup>, Yanxu SU<sup>2</sup>, Changyin SUN<sup>‡2</sup>

<sup>1</sup>*School of Cyber Science and Engineering, Southeast University, Nanjing 210096, China*

<sup>2</sup>*School of Automation, Southeast University, Nanjing 210096, China*

E-mail: jiaqi2018@seu.edu.cn; qlwang@seu.edu.cn; yanxu.su@seu.edu.cn; cysun@seu.edu.cn

Received Apr. 21, 2020; Revision accepted Sept. 4, 2020; Crosschecked June 8, 2021

**Abstract:** This study investigates the consensus problem of a nonlinear discrete-time multi-agent system (MAS) under bounded additive disturbances. We propose a self-triggered robust distributed model predictive control consensus algorithm. A new cost function is constructed and MAS is coupled through this function. Based on the proposed cost function, a self-triggered mechanism is adopted to reduce the communication load. Furthermore, to overcome additive disturbances, a local minimum–maximum optimization problem under the worst-case scenario is solved iteratively by the model predictive controller of each agent. Sufficient conditions are provided to guarantee the iterative feasibility of the algorithm and the consensus of the closed-loop MAS. For each agent, we provide a concrete form of compatibility constraint and a consensus error terminal region. Numerical examples are provided to illustrate the effectiveness and correctness of the proposed algorithm.

**Key words:** Consensus; Self-triggered control; Distributed model predictive control

<https://doi.org/10.1631/FITEE.2000182>

**CLC number:** TP273

## 1 Introduction

As an advanced control method, model predictive control (MPC) has advantages of handling system constraints in an explicit form (Mayne et al., 2000) and implementing optimal control. Therefore, MPC has attracted extensive attention from researchers in the control field (Magni et al., 2003; Li and Shi, 2014; Rosolia et al., 2017). In addition, some large-scale discrete-time multi-agent systems (MASs) have emerged, such as multi-region power systems (Mohamed et al., 2011) and wireless sensor networks (Xi

et al., 2010). Inspired by the distributed control system (DCS) with MPC, there are several studies of distributed MPC (DMPC) in the literature, e.g., Summers and Lygeros (2012), Al-Gherwi et al. (2013), and Zheng et al. (2013). Compared with the traditional centralized MPC through a single controller, DMPC is more appealing due to its flexible control structure and high performance.

Recently, DMPC for MAS has become a hot research area. One common research direction is the consensus of MAS using DMPC schemes. A wide variety of solution strategies have been proposed to ensure consensus (Müller et al., 2012; Zhan and Li, 2013; Cheng et al., 2015; Li and Yan, 2015). The consensus of MAS is required to design a distributed control protocol, which uses neighboring information to reach a state agreement with respect to each agent. For linear MAS, Li and Yan (2015) developed a distributed receding horizon control (RHC) protocol, which first explicitly expresses neighbor information versus implicit description (Zhan and Li, 2013). In

<sup>‡</sup> Corresponding author

\* Project supported by the National Natural Science Foundation of China (Nos. 61973074, U1713209, 61520106009, 61533008, and 61921004), the National Key R&D Program of China (No. 2018AAA0101400), and the Science and Technology on Information System Engineering Laboratory, China (No. 05201902)

ORCID: Jiaqi LI, <https://orcid.org/0000-0003-0614-4358>; Changyin SUN, <https://orcid.org/0000-0001-9269-334X>

© Zhejiang University Press 2021

addition, more detailed results to ensure consensus were included in Li and Yan (2015) for MAS with linear-time invariant and one-dimensional dynamics. Li et al. (2016) focused on how to design an information exchange mechanism for consensus. In particular, the authors analyzed detailed consensus conditions for finite and infinite horizon cases. They also indicated that consensus performance is related to the network topology. For nonlinear MAS, a relatively general cooperative control DMPC framework was reported by Müller et al. (2012), where a non-iterative solution method was adopted for each agent; i.e., optimization problems are solved only once at each sampling instant, and this results in fewer communication requirements. In Gao et al. (2017), consensus for second-order nonlinear systems with a dynamic reference was considered. Three critical components, the terminal cost, terminal region, and auxiliary controller, were denoted in a more understandable way. Moreover, Gao et al. (2017) proposed a time-varying compatibility constraint to ensure the convergence of the closed-loop system. Note that external disturbances were not considered in the aforementioned papers (Müller et al., 2012; Zhan and Li, 2013; Cheng et al., 2015; Li and Yan, 2015; Li et al., 2016; Gao et al., 2017). In a practical environment, systems are inevitably affected by ubiquitous uncertainties. Therefore, considering bounded additive disturbances, in this study, we propose a robust DMPC consensus strategy for a class of nonlinear MAS.

Note that the vast majority of existing DMPC algorithms require control execution at each sampling instant (Su et al., 2019a). Inevitably, a great deal of computing and communication consumption is generated in this process. Simultaneously, due to the limitations of the actual network, a large amount of communication may induce a certain degree of deterioration on the controlled system. Event-triggered control is an effective energy-saving strategy that can achieve aperiodic control for a small average sampling rate (Zou YY et al., 2017). Currently, event-triggered control is applied widely in various fields. Theoretical and practical results can be seen in previous publications (Ferrara et al., 2012; Lehmann et al., 2013; Zou WC and Xiang, 2019). Recently, Zou WC et al. (2020a, 2020b) applied the event-triggered scheme to consensus-tracking control and containment control of MAS, and Zeno behavior was

avoided by designing appropriate triggered rules. However, an event-triggered mechanism needs an additional detection part to continuously obtain the current state of the actual system, which is undesirable for some systems with high sampling costs. Thus, self-triggered control was proposed using previously predicted states to pre-determine the next triggering instant (Heemels et al., 2012). This avoids the disadvantage of the high-frequency sampling problem of event-triggered control. A self-triggered MPC algorithm for a single nonlinear system was explored in several studies (Hashimoto et al., 2017; Liu et al., 2018; Su et al., 2019b), which implemented a self-triggered control to MPC and stabilized the closed-loop system. In Hashimoto et al. (2017), Liu et al. (2018), and Su et al. (2019b), the control input and self-triggered strategy were designed via an optimization problem, whereas the results obtained were asynchronously determined. In Li et al. (2018), an independent variable reflecting the cost of communication was incorporated into the system's cost function to synchronously trade off the desired triggering and control behavior. It may require fewer conservative design parameters compared with several other studies (Hashimoto et al., 2017; Liu et al., 2018; Su et al., 2019b). For a linear MAS, Zhan et al. (2019a) and Mi et al. (2020) co-designed a self-triggered mechanism and DMPC to achieve a coordinated value, which efficiently reduced the communication load. However, a few studies combined the self-triggered mechanism and DMPC algorithm to solve the consensus problem of nonlinear uncertain MAS. Thus, we propose a self-triggered robust DMPC consensus algorithm, which considers both control costs and communication load. Our study partially extends the results of Liu et al. (2018) to the case of distributed control of MAS.

The main contributions of this paper are twofold:

1. We introduce a self-triggered strategy via optimization, which relieves the heavy communication burden. The maximum triggering interval is user-defined and is no more than the predicted horizon. Considering bounded additive disturbances, for each discrete-time nonlinear agent, we use a min-max robust DMPC which explicitly includes uncertainty realizations as optimized decision variables in the entire optimization control problem, which is more intuitive compared with robust DMPC using a nominal model (Zhan et al., 2019b).

2. Sufficient conditions are presented to guarantee the feasibility of the optimization algorithm and the consensus over the considered MAS, where we employ the invariant set theory to implement the input-to-state practical stability (ISpS) framework with respect to the consensus error. Moreover, based on the latest neighboring information, we provide a specific form of compatibility constraints and consensus error terminal regions.

Notations:  $\mathbb{R}$  and  $\mathbb{N}$  stand for the sets of real numbers and non-negative integers, respectively.  $\mathbb{R}^n$  denotes a set of  $n$ -dimensional real column vectors. Given an arbitrary column vector,  $\|\cdot\|$  represents its Euclidean norm. Let  $\mathbb{R}_{\geq c_1}$ ,  $\mathbb{R}_{(c_1, c_2]}$ ,  $\mathbb{N}_{\geq c_1}$ , and  $\mathbb{N}_{(c_1, c_2]}$  denote  $\{t \in \mathbb{R} \mid t \geq c_1\}$ ,  $\{t \in \mathbb{R} \mid c_1 < t \leq c_2\}$ ,  $\{t \in \mathbb{N} \mid t \geq c_1\}$ , and  $\{t \in \mathbb{N} \mid c_1 < t \leq c_2\}$ , respectively. A scalar continuous function  $\alpha: \mathbb{R}_{\geq 0} \rightarrow \mathbb{R}_{\geq 0}$  is a class of  $K$  if it is strictly increasing and  $\alpha(0)=0$ . If a function belongs to a class  $K$  and meets  $\alpha(s) \rightarrow +\infty$  as  $s \rightarrow +\infty$ , it is called a class of  $K_\infty$ . If for every fixed  $t \in \mathbb{R}_{\geq 0}$ ,  $\beta(\cdot, t)$  is a class of  $K$ , and for every fixed  $s \in \mathbb{R}_{\geq 0}$ ,  $\beta(s, \cdot)$  is decreasing and  $\lim_{t \rightarrow \infty} \beta(s, t) = 0$ , then  $\beta(\cdot, \cdot)$  is a class of KL.

## 2 Preliminaries and problem formulation

We study a group of perturbed nonlinear MASs consisting of  $M$  agents. The communication topology can be represented by a directed graph  $G = \{V, E, A\}$ , where the vertex set is  $V = \{1, 2, \dots, M\}$ , the edge set is  $E \subseteq \{(i, j) \mid i, j \in V, i \neq j\}$ , and the adjacency matrix is  $A \in \mathbb{R}^{M \times M}$  with  $A = [a_{ij}]$ . In particular, if agent  $i$  can receive the information from agent  $j$ , then edge  $(j, i) \in E$  and  $a_{ij} = 1$ ; otherwise,  $a_{ij} = 0$ . The neighboring index set of agent  $i$  is denoted by  $N_i = \{j \mid j \in V, (j, i) \in E\}$ .  $|N_i|$  represents the number of neighbors of agent  $i$ . Suppose that each vertex has no self-loop (i.e.,  $a_{ii} = 0$ ), and that the communication network over MAS is directed (i.e.,  $a_{ij} \neq a_{ji}$ ). Furthermore, we require that each system should have at least one neighbor of information and each time instant can be measured.

To achieve consensus over MAS, each agent is modeled as

$$x_i(t+1) = f(x_i(t), u_i(t), w_i(t)), \quad i \in \{1, 2, \dots, M\}, \quad (1)$$

where  $x_i(t) \in \mathbb{R}^n$ ,  $u_i(t) \in \mathbb{R}^m$ , and  $w_i(t) \in W_i \subset \mathbb{R}^w$  represents the state, control inputs, additive disturbances of agent  $i$ , respectively. Here,  $f: \mathbb{R}^n \times \mathbb{R}^m \times \mathbb{R}^w \rightarrow \mathbb{R}^n$  is an arbitrary nonlinear function with  $f(0, 0, 0) = 0$ . For each agent  $i$ , define  $e_i(t) = x_i(t) - \hat{x}_{-i}(t)$ , where  $e_i(t)$  is the state consensus error, and  $\hat{x}_{-i}(t)$  represents the average state of its neighbors. The specific expression on  $\hat{x}_{-i}(t)$  is given later. Let  $\rho_i \triangleq \sup_{w_i(t) \in W_i} \|w_i(t)\|$  denote a known disturbance bound. Assume that the consensus error and control input are constrained as  $e_i(t) \in E_i$ ,  $u_i(t) \in U_i$ . Furthermore,  $E_i$ ,  $U_i$ , and  $W_i$  are compact sets containing the origin in their interiors.

**Definition 1** (Robust positively invariant (RPI) set (Su et al., 2019a)) For the established system model (1), a set  $E_i \subseteq \mathbb{R}^n$  is called an ‘‘RPI set’’ if for all  $e_i(t) \in E_i$ ,  $e_i(t+l) \in E_i$  ( $l \in \mathbb{R}_{\geq 0}$ ) exists for all  $w_i(t) \in W_i$ .

**Definition 2** (Regional ISpS) If there exists an RPI set  $E_i \subseteq \mathbb{R}^n$  including the origin, a KL function  $\beta_i$ , a  $K$  function  $\alpha_i$ , and a constant  $d_i \in \mathbb{R}_{\geq 0}$  satisfying

$$\|e_i(t)\| \leq \beta_i(\|e_i(0)\|, t) + \alpha_i(\sup_{\tau \in [0, t-1]} \|w_i(\tau)\|) + d_i, \quad (2)$$

where each  $e_i(0) \in E_i$  and  $w_i(t) \in W_i$ , then the state consensus error dynamics of system (1) is said to be ISpS in  $E_i$  with respect to  $w_i$ .  $e_i(0)$  is the initial state consensus error, and  $w_i$  is the disturbance.

**Lemma 1** For every agent  $i \in \{1, 2, \dots, M\}$ , let  $\sigma_i(\cdot) \in K$ ,  $\alpha_1(\cdot)$ ,  $\alpha_2(\cdot)$ ,  $\alpha_3(\cdot) \in K_\infty$ , and  $\tau_1, \tau_2 \in \mathbb{R}_{> 0}$ . Given a set  $E_i$  as defined in Definition 2 and a function  $V_i(e_i): \mathbb{R}^n \rightarrow \mathbb{R}_{\geq 0}$  to satisfy the following two conditions:

1.  $\alpha_1(\|e_i\|) \leq V_i(e_i) \leq \alpha_2(\|e_i\|) + \tau_1$ ;
2.  $V_i(e_i(t+1)) - V_i(e_i(t)) \leq -\alpha_3(\|e_i\|) + \sigma_i(\|w_i\|) + \tau_2$ ,

for all  $e_i \in E_i$ ,  $w_i \in W_i$ , the state consensus error dynamics of system (1) reaches ISpS in  $E_i$  with respect to  $w_i$ , where function  $V_i(\cdot)$  is called an ISpS–

Lyapunov function. When  $\tau_1=\tau_2=0$ ,  $V_i(\cdot)$  is an ISS–Lyapunov function. The specific proof can be found in Lazar et al. (2008).

We design a self-triggered robust DMPC consensus algorithm to obtain when and how to select control inputs for system (1) so that all agents can decrease the communication and computing resources and achieve consensus. We also assume that there is no delay in the transmission. The whole system operation procedure can be stated as follows: at the triggering instant  $t_k^i$ , each agent first deduces the self-triggered conditions according to system stability, and then determines the optimal control input sequence  $\mathbf{u}_i^*(t_k^i) = \{u_i^*(t_k^i | t_k^i), u_i^*(t_k^i + 1 | t_k^i), \dots, u_i^*(t_k^i + T - 1 | t_k^i)\}$  by solving an optimization problem. Before the next triggering instant  $t_{k+1}^i$ , each agent receives a predicted state sequence from every neighbor  $j \in N_i$ . Meanwhile, agent  $i$  stores its own predicted state sequence into a buffer area, and waits for other agents who demand it. The next calculation begins at  $t_{k+1}^i$  and repeats the above procedure.

**Remark 1** Although this study discusses the discrete-time nonlinear MAS, we can apply a nearly equal process to solve the consensus problem of the continuous-time nonlinear MAS with periodic sampling.

### 3 Robust self-triggered DMPC consensus algorithm

Let  $t_k^i$  denote the  $k^{\text{th}}$  triggering instant of agent  $i$  with  $k \geq 0$ . The cost function of each agent at the triggering instant can be defined as

$$\begin{aligned}
 & J_i^{H_k^i}(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \mathbf{u}_i(t_k^i), \mathbf{w}_i(t_k^i), T) \\
 &= \sum_{l=0}^{H_k^i-1} \gamma L_i(x_i(t_k^i + l | t_k^i), \hat{x}_{-i}(t_k^i + l | t_k^i), u_i(t_k^i + l | t_k^i), w_i(t_k^i + l | t_k^i)) \\
 &+ \sum_{l=H_k^i}^{T-1} L_i(x_i(t_k^i + l | t_k^i), \hat{x}_{-i}(t_k^i + l | t_k^i), u_i(t_k^i + l | t_k^i), w_i(t_k^i + l | t_k^i)) \\
 &+ F_i(x_i(t_k^i + T | t_k^i), \hat{x}_{-i}(t_k^i + T | t_k^i)),
 \end{aligned} \tag{3}$$

where  $T \in \mathbb{N}_{\geq 1}$  is the prediction horizon,  $H_k^i$  is the

triggering interval calculated by  $H_k^i = t_{k+1}^i - t_k^i$  ( $H_k^i \in \mathbb{N}_{[1, H_{\max}]}$ ).  $H_{\max}$  is the maximum triggering interval with  $H_{\max} \in \mathbb{N}_{[1, T]}$ .  $x_i(t_k^i + l | t_k^i)$  is the state prediction of agent  $i$  regarding the future step  $t_k^i + l$  at time step  $t_k^i$ .  $L_i(x_i(t_k^i + l | t_k^i), \hat{x}_{-i}(t_k^i + l | t_k^i), u_i(t_k^i + l | t_k^i), w_i(t_k^i + l | t_k^i)) = \|x_i(t_k^i + l | t_k^i) - \hat{x}_{-i}(t_k^i + l | t_k^i)\| + \lambda \|u_i(t_k^i + l | t_k^i)\| - \psi \|w_i(t_k^i + l | t_k^i)\|$  is the stage cost and its concrete form is a continuous function. Both  $\lambda$  and  $\psi$  are given weighing scalars and generally adopt  $\lambda \in \mathbb{R}_{>0}$  and  $\psi \in \mathbb{R}_{>0}$ .  $F_i$  is the terminal cost, and its concrete form is also a continuous function  $F_i(x_i(t_k^i + T | t_k^i), \hat{x}_{-i}(t_k^i + T | t_k^i)) = \beta_i \|x_i(t_k^i + T | t_k^i) - \hat{x}_{-i}(t_k^i + T | t_k^i)\|$ , and  $\beta_i > 0$  is a weighing scalar. Let  $L_i(0, 0, 0) = 0$  and  $F_i(0, 0) = 0$ .  $\gamma \in (0, 1)$  is a control parameter reflecting triggering or a communication effect.  $\mathbf{u}_i(t_k^i) = \{u_i(t_k^i | t_k^i), u_i(t_k^i + 1 | t_k^i), \dots, u_i(t_k^i + T - 1 | t_k^i)\}$  represents the future control inputs to be obtained;  $\mathbf{w}_i(t_k^i) = \{w_i(t_k^i | t_k^i), w_i(t_k^i + 1 | t_k^i), \dots, w_i(t_k^i + T - 1 | t_k^i)\}$  represents the additive disturbance sequence. The averaged state trajectory of the neighbors of agent  $i$  is  $\hat{x}_{-i}(t_k^i) = \{\hat{x}_{-i}(t_k^i | t_k^i), \hat{x}_{-i}(t_k^i + 1 | t_k^i), \dots, \hat{x}_{-i}(t_k^i + 2T | t_k^i)\}$  with

$$\hat{x}_{-i}(t_k^i + l | t_k^i) = \sum_{j \in N_i} \frac{\hat{x}_j(t_k^i + l | t_k^i)}{|N_i|},$$

where  $\hat{x}_j(t_k^i + l | t_k^i)$  denotes the assumed state trajectory of agent  $j$  at  $t_k^i$ , which is obtained based on the received information of agent  $j$  at triggering instant  $\Gamma_j(t_k^i)$ .  $\Gamma_j(t_k^i)$  stands for the triggering instant that is closest and occurs before  $t_k^i$  of agent  $j$ . In Gao et al. (2017) and Zhan et al. (2019a), the assumed state trajectory of agent  $j$  can be expressed as

$$\hat{x}_j(t_k^i + l | t_k^i) = \begin{cases} x_j^*(t_k^i + l | \Gamma_j(t_k^i)), & l \in \mathbb{N}_{[0, T]}, \\ \mu \hat{x}_j(t_k^i + l | \Gamma_j(t_k^i)), & l \in \mathbb{N}_{[T, 2T]}, \end{cases} \tag{4}$$

where  $\hat{x}_j(\Gamma_j(t_k^i) + T | \Gamma_j(t_k^i)) = x_j^*(\Gamma_j(t_k^i) + T | \Gamma_j(t_k^i))$ . To relieve the calculation burden, a fixed parameter  $\mu$

( $\mu \in \mathbb{R}_{>0}$ ) is chosen to determine which information from neighbor agents is useful for cooperation.

**Remark 2** In the cost function, we use term  $\|x_i(t_k^i + l | t_k^i) - \hat{x}_{-i}(t_k^i + l | t_k^i)\|$  instead of term  $\sum_{j \in N_i} a_{ij}$

$\|x_i(t_k^i + l | t_k^i) - \hat{x}_j(t_k^i)\|_Q^2$  (Li and Yan, 2015), where the setting of  $\hat{x}_{-i}(t_k^i + l | t_k^i)$  can reduce part of the calculation. Meanwhile, we use the Euclidean norm instead of the usual quadratic function. Note that for every agent  $i$ , we assume some predicted trajectories for its neighbors in Eq. (4) before the next state update, because the current actual predicted trajectories  $x_j(t_k^i + l | t_k^i)$  ( $j \in N_i$ ) are unknown as the self-triggered communication mechanism.

### 3.1 Min-max optimization

According to the defined cost function (3), each agent solves the following optimization problem  $SP_i$ :

$$V_i^{H_k^i}(e_i(t_k^i), T) \triangleq \min_{u_i(t_k^i)} \max_{w_i(t_k^i)} J_i^{H_k^i} \{x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i(t_k^i), w_i(t_k^i), T\} \quad (5a)$$

subject to

$$u_i(t_k^i + l | t_k^i) \in U_i, \quad (5b)$$

$$w_i(t_k^i + l | t_k^i) \in W_i, \quad (5c)$$

$$x_i(t_k^i + l + 1 | t_k^i) = f(x_i(t_k^i + l | t_k^i), u_i(t_k^i + l | t_k^i), w_i(t_k^i + l | t_k^i)), \quad (5d)$$

$$\|x_i(t_k^i + l | t_k^i) - \hat{x}_i(t_k^i + l | t_k^i)\| \leq \frac{a}{T - H_k^i} \min_{j \in N_i} \|x_j(\Gamma_j(t_k^i)) - \hat{x}_{-j}(\Gamma_j(t_k^i) | \Gamma_j(t_k^i))\|, \quad (5e)$$

$$x_i(t_k^i + T | t_k^i) - \hat{x}_{-i}(t_k^i + T | t_k^i) \in E_i^f, \quad (5f)$$

where  $x_i(t_k^i | t_k^i) = x_i(t_k^i)$ ,  $e_i(t_k^i) = x_i(t_k^i) - \hat{x}_{-i}(t_k^i)$ , and  $a \in \mathbb{R}_{(0,1)}$  is a constant.  $E_i^f$  is the state consensus error terminal region including the origin. In Zhan et al. (2019a), the compatibility constraint (Eq. (5e)) ensures a certain degree of consensus, which implies that the predicted trajectory cannot be far away from the assumed one.

We design the state consensus error terminal region  $E_i^f$  to satisfy

$$E_i^f \triangleq \left\{ x \in X_i \mid \|x - \hat{x}_i(t_k^i + l | t_k^i)\| \leq a/T \min_{j \in N_i} \|x_j(\Gamma_j(t_k^i)) - \hat{x}_{-j}(\Gamma_j(t_k^i) | \Gamma_j(t_k^i))\|, l > T - (H_k^i)^* \right\}. \quad (6)$$

**Assumption 1** At any triggering instant in system (1), an auxiliary local feedback control law  $\bar{u}_i = k_i(x_i, \hat{x}_{-i})$  exists, where  $k_i: \mathbb{R}^n \rightarrow \mathbb{R}^m$  and  $k_i(0, 0) = 0$ , such that the state consensus error terminal region  $E_i^f$  is an RPI set. Meanwhile,  $\bar{u}_i \in U_i$  holds for all  $(x_i - \hat{x}_{-i}) \in E_i^f$ ; i.e.,  $e_i \in E_i^f$ .

**Remark 3** For the auxiliary local feedback control law, we design a set of fixed gains  $k_i$  offline (Lazar et al., 2008) to satisfy  $E_i^f$  as an RPI set. In addition, both control behavior and communication behavior are involved in Eq. (3). To prove that the considered MAS can reach a consensus, for each agent, we denote the cost function as  $J_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i(t_k^i), w_i(t_k^i), T)$  when  $\gamma=1$  and  $H_k^i=1$ . Then its optimal cost is  $V_i(e_i(t_k^i), T)$ . This is the so-called ‘‘time-driven DMPC’’ without considering communication cost.

### 3.2 Self-triggering in optimization

Between any two successive triggering instants, the control input is in the form of

$$u_i^{ST}(x_i(t_k^i + l | t_k^i)) = u_i^*(t_k^i), l \in \mathbb{N}_{[0, t_{k+1}^i - t_k^i - 1]}, \quad (7)$$

where  $u_i^*(t_k^i)$  is a set of the optimal control sequence obtained at  $t_k^i$  by solving the optimization problem  $SP_i$ . The triggering instant is defined as follows:

$$t_{k+1}^i = t_k^i + (H_k^i)^*, \quad (H_k^i)^* \triangleq \max \left\{ H_k^i \mid H_k^i \in \mathbb{N}_{[1, H_{\max}^i]}, V_i^{H_k^i}(e_i(t_k^i), T) \leq V_i^1(e_i(t_k^i), T) \right\}. \quad (8)$$

**Remark 4** Note that for each agent, the control input from  $t_k^i + 1$  to  $t_{k+1}^i - 1$  is derived from an open-loop min-max optimization problem, which depends on the previous sampling instant  $t_k^i$ . Because of the self-triggered mechanism, communication resources can be saved as the communication period increases.

We obtain the optimal triggering interval  $(H_k^i)^*$  by checking whether the optimal cost is dropping and by choosing a satisfied maximum triggering interval.

The self-triggered robust DMPC consensus algorithm for system (1) is summarized in Algorithm 1.

---

**Algorithm 1** Self-triggered robust DMPC consensus

---

**Off-line:**

**Require:**  $\lambda, \psi, \mu, \gamma, \alpha, \beta, k_i, T, H_{\max}$

**On-line:**

- 1 **for** each agent  $i \in \{1, 2, \dots, M\}$  **do**
  - 2   set  $t_0^i = 0$  as the first triggering instant with  $k=0$ ;
  - 3   transmit its state sequence  $\hat{x}_i(\tau | 0)$  to its neighbors  
    and receive  $\hat{x}_j(\tau | 0)$  from every number  $j \in N_i$ ,  
     $\tau \in [0, T)$ ;
  - 4   solve problem  $SP_i$  to obtain  $(H_k^i)^*$  and  $u_i^*(0)$ ;
  - 5 **end for** // Initialization
  - 6 **while** each  $e_i(t_k^i + l | t_k^i) \notin E_i^f$  **do**
  - 7   **while**  $t_k^i$  ( $k \geq 1$ ) is not triggered **do**
  - 8     apply  $u_i^{ST}(t_{k-1}^i)$  at  $t \in [t_{k-1}^i, t_k^i + T)$ ;
  - 9     obtain  $\hat{x}_i(\tau | t_k^i)$  ( $\tau \in [t_k^i, t_{k+1}^i]$ ) based on  
      Eqs. (3) and (4);
  - 10    store  $u_i^*(t_k^i | t_{k-1}^i)$  and  $x_i^*(t_k^i | t_{k-1}^i)$ ;
  - 11   **end while**
  - 12   measure the current state  $x(t_k^i)$ ;
  - 13   solve  $SP_i$  in problem (5) and DPMC mechanism (8)  
    to obtain  $u_i^*(\tau | t_k^i)$  and  $H_i^*(t_k^i)$  ( $\tau \in [t_k^i, t_k^i + T)$ );
  - 14   set  $k=k+1$ ;
  - 15 **end while**
  - 16 apply the auxiliary feedback control law  $\bar{u}_i = k_i(x_i, \hat{x}_i)$   
    to the corresponding subsystems;
- 

**Remark 5** In Algorithm 1, the initial state trajectory  $\hat{x}_{-i}(t_0^i)$  of the neighbors of agent  $i$  is assumed by applying zero control without constraint (5e) or (5f). Constraints (5e) and (5f) are adopted to solve problem  $SP_i$  only when  $k \geq 1$ . Meanwhile, the control actions switch from solving problem  $SP_i$  to the auxiliary feedback control law as long as all subsystems' state consensus error trajectories enter the error terminal region, which further saves computation resources. The above control idea is called a ‘‘dual-mode strategy’’ (Dunbar, 2005). In addition, we must point out that although the self-triggered robust consensus algorithm effectively eases the communication load in

this study, it also adds optimization computation due to the triggering mechanism. The quantization technique is an effective tool for saving control costs and communication resources, and many interesting results have been reported, such as in Feng et al. (2018), Xu et al. (2018), Yang et al. (2018), and Wan et al. (2019). Therefore, it is important to use quantized self-triggered control to optimize control and communication costs.

### 4 Feasibility and stability analysis

The optimization independence of MPC in adjacent time shows that the optimization feasibility of  $SP_i$  at the current moment does not guarantee the feasibility of the next moment. Thus, we must provide conditions to ensure that Algorithm 1 has iterative feasibility. Moreover, the property of iterative feasibility ensures that the optimization problem (5) is solvable.

**Assumption 2**  $E_i^f$  satisfies  $E_i^f \subseteq E_i$  and  $0 \in E_i^f$ .

**Assumption 3** There exist  $\alpha_l, \alpha_f, \alpha_F \in K_\infty, \alpha_w$ , and  $\sigma \in K$ , such that

- (1)  $L_i(x_i, \hat{x}_{-i}, u_i, w_i) \geq \alpha_l(\|x_i - \hat{x}_{-i}\|) - \alpha_w(\|w_i\|) \geq 0$ ,  
 $\forall (x_i - \hat{x}_{-i}) \in E_i, \forall u_i \in U_i, \forall w_i \in W_i$ ;
- (2)  $\alpha_f(\|x_i - \hat{x}_{-i}\|) \leq F_i(x_i, \hat{x}_{-i}) \leq \alpha_F(\|x_i - \hat{x}_{-i}\|)$ ,  
 $\forall (x_i - \hat{x}_{-i}) \in E_i^f$ ;
- (3)  $F_i(x_i(t_k^i + T + 1 | t_k^i), \hat{x}_{-i}(t_k^i + T + 1 | t_{k+1}^i)) - F_i(x_i(t_k^i + T | t_k^i), \hat{x}_{-i}(t_k^i + T | t_{k+1}^i)) \leq -L_i(x_i(t_k^i + T | t_k^i), \hat{x}_{-i}(t_k^i + T | t_{k+1}^i), u_i(t_k^i + T | t_k^i), w_i(t_k^i + T | t_k^i)) + \sigma(\|w_i(t_k^i + T)\|)$ ,  $\forall (x_i - \hat{x}_{-i}) \in E_i^f, \forall w_i \in W_i$ .

It can be observed that  $F_i(\cdot, \cdot)$  is an ISS-Lyapunov function in  $E_i^f$ .

**Lemma 2** If Assumption 3 is satisfied for any state consensus error  $(x_i(t_0) - \hat{x}_{-i}(t_0)) \in E_i^f$  and admissible additive disturbance  $w_i \in W_i$ , then

$$F_i(x_i(t_m), \hat{x}_{-i}(t_m)) - F_i(x_i(t_0), \hat{x}_{-i}(t_0)) \leq - \sum_{p=0}^{m-1} (L_i(x_i(t_p), \hat{x}_{-i}(t_p), \bar{u}_i(t_p), w_i(t_p)) - \sigma(\|w_i(t_p)\|)), \tag{9}$$

where  $x_i(t_m)$  is calculated by applying the auxiliary feedback control law  $\bar{u}_i$ ,  $m \in \mathbb{N}_{[1,T]}$ .

**Proof** According to Assumption 3(3), we have

$$\begin{aligned}
 &F_i(x_i(l+1|t_k), \hat{x}_{-i}(l+1|t_{k+1})) - F_i(x_i(l|t_k), \hat{x}_{-i}(l|t_{k+1})) \\
 &\leq -(L_i(x_i(l|t_k), \hat{x}_{-i}(l|t_{k+1}), \bar{u}_i(l|t_k), w_i(l|t_k)) \\
 &\quad - \sigma(\|w_i(l|t_k)\|)),
 \end{aligned} \tag{10}$$

for all  $(x_i - \hat{x}_{-i}) \in E_i^f$ . Because  $E_i^f$  is an RPI set, by summing inequality (10) from  $l=0$  to  $l=m-1$ , inequality (9) can be proved for agent  $i$ .

**Theorem 1** (Feasibility and stability) For each agent  $i$  under Assumption 3, if  $SP_i$  is feasible at the initial triggering instant  $t_0^i$ , then Algorithm 1 is iteratively feasible. Furthermore, the state consensus error dynamics of system (1) reaches ISpS with respect to additive disturbances and it follows that as  $t \rightarrow \infty$ ,  $\|x_i - x_j\| = 0$  for all  $i, j \in \{1, 2, \dots, M\}$ , MAS with self-triggered robust DMPC mechanisms (7) and (8) can reach consensus.

The proof of Theorem 1 involves two parts: feasibility and consensus analysis.

### 4.1 Feasibility analysis

**Definition 3** (Initial feasible set) For every agent  $i$ , the set  $E_i^{\text{MPC}}(T) \in E_i$  is called the ‘‘initial feasible set’’ of Algorithm 1, which indicates that the set of state consensus errors can be controlled robustly into  $E_i^f$  in  $T$  steps for all  $e_i(t_0) \in E_i^{\text{MPC}}(T)$  and all  $w_i \in W_i$ .

Suppose that we obtain a feasible solution  $u_i^*(t_k)$  of problem  $SP_i$  and  $(H_k^i)^*$  at  $t_k$ . Then we construct a feasible solution at triggering instant  $t_{k+1}^i$ . This can be expressed as

$$\begin{aligned}
 \tilde{u}_i(t_{k+1}^i) = &\left\{ u_i^*(t_{k+1}^i|t_k), u_i^*(t_{k+1}^i+1|t_k), \dots, u_i^*(t_{k+1}^i+T-(H_k^i)^* \right. \\
 &- 1|t_k), \bar{u}_i(t_{k+1}^i+T-(H_k^i)^*|t_{k+1}), \bar{u}_i(t_{k+1}^i+T \\
 &\left. -(H_k^i)^*+1|t_{k+1}), \dots, \bar{u}_i(t_{k+1}^i+T-1|t_{k+1}) \right\},
 \end{aligned} \tag{11}$$

with  $\bar{u}_i(t_{k+1}^i+q|t_{k+1}^i) = k_i(x_i(t_{k+1}^i+q|t_{k+1}^i), \hat{x}_{-i}(t_{k+1}^i+q$

$|t_{k+1}^i))$  and  $q \in \mathbb{N}_{[T-(H_k^i)^*, T-1]}$ .

When  $t_{k+1}^i \leq t < t_{k+1}^i+T-(H_k^i)^*$ , constraints (5b)–(5f) can be easily satisfied since  $\tilde{u}_i(t|t_{k+1}^i) = u_i^*(t|t_k^i)$  during this period. When  $t_{k+1}^i+T-(H_k^i)^* \leq t < t_{k+1}^i+T$ , using Assumption 1, constraints (5b)–(5d) and (5f) can be satisfied. In addition, according to the definition of the terminal region of the state consensus error in inequality (6), we can obtain compatibility constraint (5e) when  $t_{k+1}^i+T-(H_k^i)^* \leq t < t_{k+1}^i+T$ . Thus, all constraints in problem  $SP_i$  are satisfied, and  $\tilde{u}_i(t_{k+1}^i)$  is indeed a feasible solution at  $t_{k+1}^i$ . In summary, as long as problem  $SP_i$  admits a feasible solution at the initial instant  $t_0^i$ , from the induction principle we can obtain feasible solutions for all  $k \geq 0$ .

### 4.2 Consensus analysis

Due to the iterative feasibility, we know that the optimization calculation between two successive triggering instants in Algorithm 1 is relevant, and that the value of the cost function defined in inequality (2) is relevant and comparable.

**Lemma 3** For the optimal cost defined in problem (5),  $V_i^1(e_i(t_k^i), T) \leq V_i(e_i(t_k^i), T)$  exists.

**Proof** Suppose that  $u_i^*(t_k^i) = \{u_i^*(t_k^i|t_k^i), u_i^*(t_k^i+1|t_k^i), \dots, u_i^*(t_k^i+T-1|t_k^i)\}$  and  $w_i^*(t_k^i) = \{w_i^*(t_k^i|t_k^i), w_i^*(t_k^i+1|t_k^i), \dots, w_i^*(t_k^i+T-1|t_k^i)\}$  are the solutions obtained using  $V_i(e_i(t_k^i), T)$ . Then according to optimality, we obtain

$$\begin{aligned}
 V_i^1(e_i(t_k^i), T) &\leq \max_{w_i(t_k^i)} J_i^1(x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i^*(t_k^i), w_i(t_k^i), T) \\
 &= \max_{w_i(t_k^i)} J_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i^*(t_k^i), w_i(t_k^i), T) \\
 &\quad + (\gamma - 1)L_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i^*(t_k^i), w_i(t_k^i)) \\
 &= V_i(e_i(t_k^i), T) + (\gamma - 1)L_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \\
 &\quad u_i^*(t_k^i), w_i(t_k^i)).
 \end{aligned}$$

According to Assumption 3(1),  $L_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), u_i^*(t_k^i), w_i(t_k^i)) \geq 0$ , and  $\gamma \in (0, 1)$ . Lemma 3 holds.

Using the definition of  $SP_i$  in problem (5), for all  $e_i(t_k^i) \in E_i^{\text{MPC}}(T)$ , we obtain

$$\begin{aligned}
 V_i^{(H_k^i)^*}(e_i(t_k^i), T) &= J_i^{(H_k^i)^*}(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \mathbf{u}_i^*(t_k^i), \mathbf{w}_i^*(t_k^i), T) \\
 &\geq \min_{I_i(t_k^i)} J_i^{(H_k^i)^*}(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \mathbf{u}_i(t_k^i), 0, T) \\
 &\geq \gamma \alpha_l \left( \|x_i(t_k^i) - \hat{x}_{-i}(t_k^i)\| \right).
 \end{aligned} \tag{12}$$

To obtain the upper bound of the class  $K_\infty$  function of the value function, define a field of origin  $O_r = \{(x_i - \hat{x}_{-i}) \mid (x_i - \hat{x}_{-i}) \in E_i, \|x_i - \hat{x}_{-i}\| < r\}$  that satisfies  $O_r \subseteq E_i^f$ .  $O_r$  exists as  $E_i^f$  includes the origin. Then, consider the following two situations:

Case1: for all  $e_i(t_k^i) \in E_i^f$ . We have

$$\begin{aligned}
 &J_i^1(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \tilde{\mathbf{u}}_i(t_k^i), \mathbf{w}_i(t_k^i), T+1) \\
 &= J_i^1(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \mathbf{u}_i^*(t_k^i), \mathbf{w}_i(t_k^i), T) \\
 &\quad + F_i(x_i(t_k^i + T + 1 \mid t_k^i), \hat{x}_{-i}(t_k^i + T + 1 \mid t_k^i)) \\
 &\quad - F_i(x_i(t_k^i + T \mid t_k^i), \hat{x}_{-i}(t_k^i + T \mid t_k^i)) + L_i(x_i(t_k^i + T \mid t_k^i), \\
 &\quad \hat{x}_{-i}(t_k^i + T \mid t_k^i), \bar{\mathbf{u}}_i(t_k^i + T \mid t_k^i), \mathbf{w}_i(t_k^i + T \mid t_k^i)),
 \end{aligned} \tag{13}$$

where  $\tilde{\mathbf{u}}_i(t_k^i) = [\mathbf{u}_i^*(t_k^i), \bar{\mathbf{u}}_i(t_k^i + T \mid t_k^i)]$  and  $\bar{\mathbf{u}}_i(t_k^i + T \mid t_k^i) = k_i(x_i(t_k^i + T \mid t_k^i), \hat{x}_{-i}(t_k^i + T \mid t_k^i))$ . Under Assumption 3(3) and the sub-optimality of the input control signals  $\tilde{\mathbf{u}}_i(t_k^i)$ , we have

$$\begin{aligned}
 V_i^1(e_i(t_k^i), T+1) &\leq \max_{\mathbf{w}_i(t_k^i)} J_i^1(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \tilde{\mathbf{u}}_i(t_k^i), \mathbf{w}_i(t_k^i), \\
 &\quad T+1) \leq V_i^1(e_i(t_k^i), T) + \sigma(\rho_i).
 \end{aligned} \tag{14}$$

Similarly, according to the triggering mechanism (8) and the above idea, we have

$$\begin{aligned}
 V_i^{H_k^i}(e_i(t_k^i), T) &\leq V_i^1(e_i(t_k^i), T) \\
 &\leq V_i^1(e_i(t_k^i), 1) + (T-1)\sigma(\rho_i) \\
 &\leq F_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i)) + T\sigma(\rho_i) \\
 &\quad + (\gamma-1)L_i(x_i(t_k^i), \hat{x}_{-i}(t_k^i), \bar{\mathbf{u}}_i(t_k^i), \mathbf{w}_i(t_k^i)) \\
 &\leq \alpha_F(\|x_i(t_k^i) - \hat{x}_{-i}(t_k^i)\|) + T\sigma(\rho_i).
 \end{aligned} \tag{15}$$

Case 2: for all  $e_i(t_k^i) \in E_i^{\text{MPC}}(T) \notin E_i^f$ ,  $e_i(t_k^i) \notin O_r$ , and  $\|x_i - \hat{x}_{-i}\| \geq r$ . Since the iterative feasibility of the optimization problem has been proved previously, a

group of feasible control solutions that can satisfy all constraints of the optimization problem exists. Meanwhile, the optimal cost is bounded. Therefore, for the finite prediction horizon  $T$ , a large positive number  $D < +\infty$  is admitted such that  $V_i^{H_k^i}(e_i(t_k^i), T) < D$  for all time instants. Define  $\theta = \max(1, D/\alpha_F(r))$  and a class of  $K_\infty$ :  $\bar{\alpha}(s) = \theta\alpha_F(s)$ . Apparently,  $\bar{\alpha}(s) \geq \alpha_F(s)$  for all  $s \in \mathbb{R}_{>0}$ . The result is represented as

$$\begin{aligned}
 V_i^{H_k^i}(e_i(t_k^i), T) &\leq D \frac{\alpha_F(\|x_i(t_k^i) - \hat{x}_{-i}(t_k^i)\|)}{\alpha_F(\|r\|)} + T\sigma(\rho_i) \\
 &\leq \bar{\alpha}(\|x_i(t_k^i) - \hat{x}_{-i}(t_k^i)\|) + T\sigma(\rho_i).
 \end{aligned} \tag{16}$$

Combining inequalities (15) and (16), we can conclude that

$$V_i^{H_k^i}(e_i(t_k^i), T) \leq \bar{\alpha}(\|x_i(t_k^i) - \hat{x}_{-i}(t_k^i)\|) + T\sigma(\rho_i). \tag{17}$$

In accordance with the triggering mechanism and Lemma 3, the result is inequality (18) (on the next page).

For  $l \in \mathbb{N}_{[0, T - (H_k^i)^* - 1]}$  and using the triangle inequality and constraint (5e), it holds that

$$\begin{aligned}
 &\|x_i^*(t_{k+1}^i + l \mid t_k^i) - \hat{x}_{-i}(t_{k+1}^i + l \mid t_k^i)\| - \|x_i^*(t_{k+1}^i + l \mid t_k^i) \\
 &\quad - \hat{x}_{-i}(t_{k+1}^i + l \mid t_k^i)\| \leq \|\hat{x}_{-i}(t_{k+1}^i + l \mid t_{k+1}^i) - \hat{x}_{-i}(t_{k+1}^i + l \mid t_k^i)\| \\
 &\quad = \left\| \sum_{j \in N_i} \frac{\hat{x}_j(t_{k+1}^i + l \mid t_{k+1}^i) - \hat{x}_j(t_{k+1}^i + l \mid t_k^i)}{|N_i|} \right\| \\
 &\quad \leq \frac{a}{T - H_k^i} \|x_i(t_k^i) - \hat{x}_{-i}(t_k^i \mid t_k^i)\|.
 \end{aligned} \tag{19}$$

Substituting inequality (19) into inequality (18) and considering Lemma 2, we obtain inequality (20) (on the next page).

The last two terms in inequality (20) can be treated as a constant  $\tau_2$ . According to the sufficient conditions of ISpS in Lemma 1, we show that the state consensus error dynamics of system (1) is ISpS at triggering instants in  $E_i^{\text{MPC}}(T)$  with respect to  $w_i$ , and it follows that  $\lim_{t \rightarrow \infty} (x_i(t) - \hat{x}_{-i}(t)) = 0$ , which implies that the considered MAS can reach consensus.



$$\begin{aligned}
 & V_i^{(H_{k+1}^i)^*}(x_i(t_{k+1}^i), T) - V_i^{(H_k^i)^*}(x_i(t_k^i), T) \\
 & \leq V_i^1(x_i(t_{k+1}^i), T) - V_i^{(H_k^i)^*}(x_i(t_k^i), T) \\
 & \leq \sum_{l=0}^{T-(H_k^i)^*-1} \left( \|x_i^*(t_{k+1}^i + l | t_k^i) - \hat{x}_{-i}(t_{k+1}^i + l | t_{k+1}^i)\| + \|x_i^*(t_{k+1}^i + l | t_k^i) - \hat{x}_{-i}(t_{k+1}^i + l | t_k^i)\| \right) \\
 & \quad + \sum_{l=T-(H_k^i)^*}^{T-1} \left( \|x_i(t_{k+1}^i + l | t_{k+1}^i) - \hat{x}_{-i}(t_{k+1}^i + l | t_{k+1}^i)\| + \lambda \|\bar{u}_i(t_{k+1}^i + l | t_{k+1}^i)\| - \psi \|w_i(t_k^i + l | t_k^i)\| \right) \\
 & \quad - \sum_{l=0}^{(H_k^i)^*-1} \gamma \left( \|x_i^*(t_k^i + l | t_k^i) - \hat{x}_{-i}(t_k^i + l | t_k^i)\| + \lambda \|u_i^*(t_k^i + l | t_k^i)\| - \psi \|w_i(t_k^i + l | t_k^i)\| \right) \\
 & \quad + F_i(x_i(t_{k+1}^i + T | t_{k+1}^i), \hat{x}_{-i}(t_{k+1}^i + T | t_{k+1}^i)) - F_i(x_i(t_k^i + T | t_k^i), \hat{x}_{-i}(t_k^i + T | t_k^i)).
 \end{aligned} \tag{18}$$

$$\begin{aligned}
 & V_i^{(H_{k+1}^i)^*}(x_i(t_{k+1}^i), T) - V_i^{(H_k^i)^*}(x_i(t_k^i), T) \\
 & \leq \sum_{l=0}^{T-(H_k^i)^*-1} \frac{a}{T - H_k^i} \|x_i(t_k^i) - \hat{x}_{-i}(t_k^i | t_k^i)\| + (H_k^i)^* \sigma(\rho_i) \\
 & \quad - \sum_{l=0}^{(H_k^i)^*-1} \gamma \left( \|x_i^*(t_k^i + l | t_k^i) - \hat{x}_{-i}(t_k^i + l | t_k^i)\| + \lambda \|u_i^*(t_k^i + l | t_k^i)\| - \psi \|w_i(t_k^i + l | t_k^i)\| \right) \\
 & \leq -\gamma \alpha_l \left( \|x_i(t_k^i) - \hat{x}_{-i}(t_k^i | t_k^i)\| \right) + \gamma \alpha_w \left( \|w_i(t_k^i + l | t_k^i)\| \right) + a \|x_i(t_k^i) - \hat{x}_{-i}(t_k^i | t_k^i)\| + (H_k^i)^* \sigma(\rho_i).
 \end{aligned} \tag{20}$$

### 5 Simulations

Considering a four-agent cart-damper-spring system, the dynamics of each agent is

$$\begin{cases}
 x_{i,1}(t_{k+1}^i) = x_{i,1}(t_k^i) + x_{i,2}(t_k^i)T_i, \\
 x_{i,2}(t_{k+1}^i) = -\frac{k_i T_i}{M_i} e^{-x_{i,1}(t_k^i)} x_{i,1}(t_k^i) + \frac{M_i - h_i T_i}{M_i} x_{i,2}(t_k^i) \\
 \quad + \frac{T_i}{M_i} u_i(t_k^i) + \frac{T_i}{M_i} w_i(t_k^i),
 \end{cases} \tag{21}$$

where  $x_{i,1}$  and  $x_{i,2}$  express the displacement of the cart and its velocity, respectively, and  $k_i=0.25$  N/m is the linear spring factor,  $h_i=1.20$  N·s/m is the damper factor,  $M_i=1$  kg is the mass of the cart, and  $T_i=0.4$  s is the sampling period. For simplicity, each agent has the same system parameters. The input control force is  $u_i$ , which is limited to  $-2 \leq u_i \leq 2$ . The additive disturbance constraint is set as  $-0.2 \leq w_i \leq 0.4$ . In addition, each agent can communicate with its neighbor agents.

For the four agents, their neighboring sets are  $N_1=\{2\}$ ,  $N_2=\{1, 3\}$ ,  $N_3=\{2, 4\}$ , and  $N_4=\{3\}$ . Some parameters obtained offline are selected as  $T=5$ ,  $\lambda=0.01$ ,  $H_{\max}=4$ ,  $\psi=2$ ,  $\alpha=0.2$ ,  $E_i^f = 2$ , and  $\beta_i=3$  for all  $i$ 's. The auxiliary local feedback control gain and the initial state of four agents are designed as  $k=[-0.6, -0.4; -0.6, -0.4; -0.5, -0.3; -0.5, -0.4]$  and  $x=[3.4,$

$-1.5; 0.6, 0.5; -1.2, 2; 2.5, -1.2]$ , respectively. Using the MATLAB fminimax module, the proposed self-triggered DMPC consensus algorithm is executed. To show the performance level under Algorithm 1, we consider two configurations of  $\gamma=0.85$  and  $\gamma=0.5$  on the constrained min-max optimization problems. Parameter  $k$  represents the number of samples. The performance results are shown in Figs. 1 and 2. For each agent, Figs. 1a and 1b display the state trajectories of each agent, while Fig. 1c displays the control inputs. Figs. 2a and 2b display the corresponding triggering instants of each agent, showing that all triggering intervals converge to  $H_{\max}=4$ . It can be observed that a smaller  $\gamma$  has a lower triggering frequency, which suggests that the burden of communication can be reduced. For further comparisons, we use time-driven DMPC with the same parameters when  $\gamma=0.85$  to obtain results. The comparison of number of triggering times regarding different  $\gamma$ 's and time-driven parameter is presented in Table 1, which shows that the self-triggered approach significantly reduces the communication cost. Figs. 3a and 3b plot the evolution of system states using self-triggered and time-driven control, respectively. Note that the performance of self-triggered control is comparable with that of time-driven control, where the considered MAS reaches consensus in two strategies. Fig. 3c provides the control inputs of two strategies.

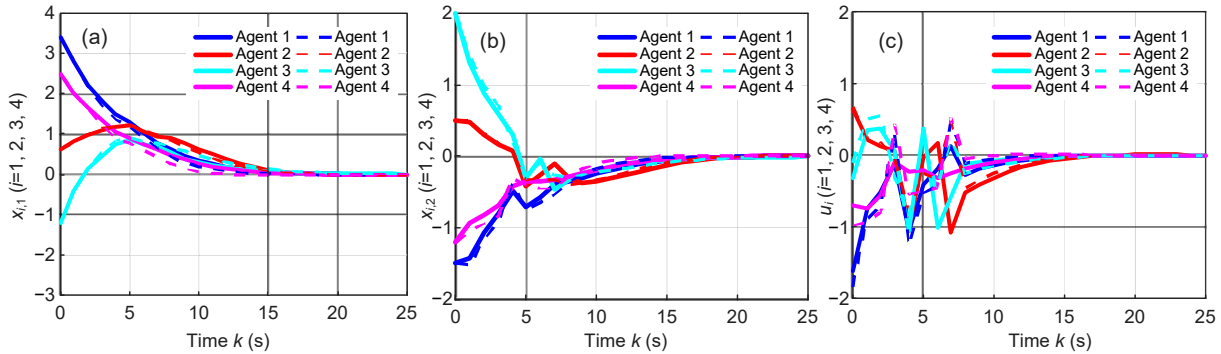


Fig. 1 Trajectories of system states  $x_{i,1}$  (a),  $x_{i,2}$  (b), and  $u_i$  (c) with  $\gamma=0.85$  (solid lines) and  $\gamma=0.5$  (dashed lines)

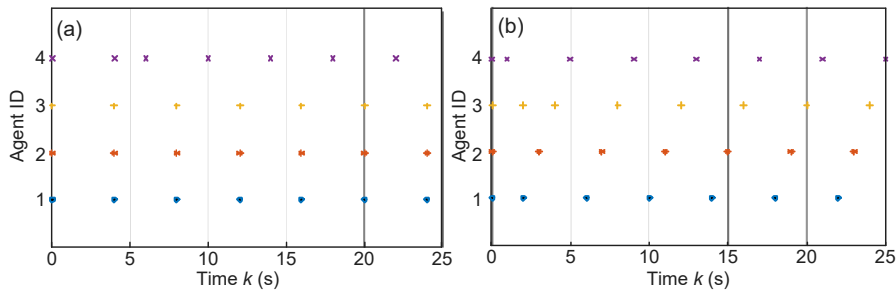


Fig. 2 Triggering instants with  $\gamma=0.5$  (a) and  $\gamma=0.85$  (b)

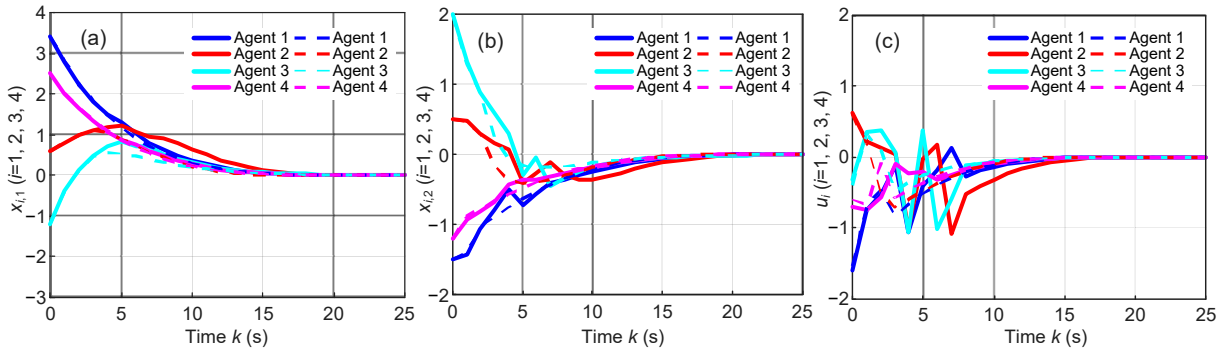


Fig. 3 State trajectories  $x_{i,1}$  (a),  $x_{i,2}$  (b), and  $u_i$  (c) using self-triggered (solid lines) and time-driven (dashed lines) control

Table 1 Comparison of total number of triggering times

Control parameter	Average number of triggering times	Total number of triggering times
Time-driven	1.000 (for agents 1–4)	100
Self-triggered	$\gamma=0.85$ 3.571 (for agents 1 and 2)	30
	3.125 (for agents 3 and 4)	
$\gamma=0.5$	3.571 (for agents 1–4)	28

## 6 Conclusions

In this study, a robust DMPC method has been used to study the consensus problem of discrete

nonlinear MAS with additive disturbances. We have proposed a self-triggered control scheduler based on a min-max optimization problem to determine the control inputs and maximize the triggering interval. The control sequence updates and transmits at only triggering instants, which can significantly reduce communication costs. The conditions that guarantee the feasibility of the algorithm and the consensus over the perturbed nonlinear MAS are sufficient and practicable, and we have used the invariant set theory to realize ISpS with respect to the state consensus error to ensure that the closed-loop MAS can achieve consensus. Furthermore, simulation examples have shown the effectiveness of the algorithm.

## Contributors

Qingling WANG, Yanxu SU, and Changyin SUN guided the research. Jiaqi LI performed the experiments and drafted the manuscript. Qingling WANG and Yanxu SU helped organize the manuscript. Jiaqi LI revised and finalized the paper.

## Compliance with ethics guidelines

Jiaqi LI, Qingling WANG, Yanxu SU, and Changyin SUN declare that they have no conflict of interest.

## References

- Al-Gherwi W, Budman H, Elkamel A, 2013. A robust distributed model predictive control based on a dual-mode approach. *Comput Chem Eng*, 50(5):130-138. <https://doi.org/10.1016/j.compchemeng.2012.11.002>
- Cheng ZM, Zhang HT, Fan MC, et al., 2015. Distributed consensus of multi-agent systems with input constraints: a model predictive control approach. *IEEE Trans Circ Syst I*, 62(3):825-834. <https://doi.org/10.1109/TCSI.2014.2367575>
- Dunbar WB, 2005. A distributed receding horizon control algorithm for dynamically coupled nonlinear systems. Proc 44<sup>th</sup> IEEE Conf on Decision and Control, p.6673-6679. <https://doi.org/10.1109/CDC.2005.1583234>
- Feng YM, Yang XS, Song Q, et al., 2018. Synchronization of memristive neural networks with mixed delays via quantized intermittent control. *Appl Math Comput*, 339:874-887. <https://doi.org/10.1016/j.amc.2018.08.009>
- Ferrara A, Oleari AN, Sacone S, et al., 2012. An event-triggered model predictive control scheme for freeway systems. Proc 51<sup>st</sup> IEEE Conf on Decision and Control, p.6975-6982. <https://doi.org/10.1109/CDC.2012.6426241>
- Gao YL, Dai L, Xia YQ, et al., 2017. Distributed model predictive control for consensus of nonlinear second-order multi-agent systems. *Int J Rob Nonl Contr*, 27(5):830-842. <https://doi.org/10.1002/rnc.3603>
- Hashimoto K, Adachi S, Dimarogonas DV, 2017. Self-triggered model predictive control for nonlinear input-affine dynamical systems via adaptive control samples selection. *IEEE Trans Autom Contr*, 62(1):177-189. <https://doi.org/10.1109/TAC.2016.2537741>
- Heemels WPMH, Johansson KH, Tabuada P, 2012. An introduction to event-triggered and self-triggered control. Proc 51<sup>st</sup> IEEE Conf on Decision and Control, p.3270-3285. <https://doi.org/10.1109/CDC.2012.6425820>
- Lazar M, de la Peña DM, Heemels WPMH, et al., 2008. On input-to-state stability of min-max nonlinear model predictive control. *Syst Contr Lett*, 57(1):39-48. <https://doi.org/10.1016/j.sysconle.2007.06.013>
- Lehmann D, Henriksson E, Johansson KH, 2013. Event-triggered model predictive control of discrete-time linear systems subject to disturbances. European Control Conf, p.1156-1161. <https://doi.org/10.23919/ecc.2013.6669580>
- Li HP, Shi Y, 2014. Event-triggered robust model predictive control of continuous-time nonlinear systems. *Automatica*, 50(5):1507-1513. <https://doi.org/10.1016/j.automat.2014.03.015>
- Li HP, Yan WS, 2015. Receding horizon control based consensus scheme in general linear multi-agent systems. *Automatica*, 56:12-18. <https://doi.org/10.1016/j.automat.2015.03.023>
- Li HP, Shi Y, Yan WS, 2016. On neighbor information utilization in distributed receding horizon control for consensus-seeking. *IEEE Trans Cybern*, 46(9):2019-2027. <https://doi.org/10.1109/TCYB.2015.2459719>
- Li HP, Yan WS, Shi Y, 2018. Triggering and control codesign in self-triggered model predictive control of constrained systems: with guaranteed performance. *IEEE Trans Autom Contr*, 63(11):4008-4015. <https://doi.org/10.1109/TAC.2018.2810514>
- Liu CX, Li HP, Gao J, et al., 2018. Robust self-triggered min-max model predictive control for discrete-time nonlinear systems. *Automatica*, 89:333-339. <https://doi.org/10.1016/j.automat.2017.12.034>
- Magni L, de Nicolao G, Scattolini R, et al., 2003. Robust model predictive control for nonlinear discrete-time systems. *Int J Rob Nonl Contr*, 13(3-4):229-246. <https://doi.org/10.1002/rnc.815>
- Mayne DQ, Rawlings JB, Rao CV, et al., 2000. Constrained model predictive control: stability and optimality. *Automatica*, 36(6):789-814. [https://doi.org/10.1016/S0005-1098\(99\)00214-9](https://doi.org/10.1016/S0005-1098(99)00214-9)
- Mi XX, Zou YY, Li SY, et al., 2020. Self-triggered DMPC design for cooperative multiagent systems. *IEEE Trans Ind Electr*, 67(1):512-520. <https://doi.org/10.1109/TIE.2019.2896098>
- Mohamed TH, Bevrani H, Hassan AA, et al., 2011. Decentralized model predictive based load frequency control in an interconnected power system. *Energy Conv Manag*, 52(2):1208-1214. <https://doi.org/10.1016/j.enconman.2010.09.016>
- Müller MA, Reble M, Allgöwer F, 2012. Cooperative control of dynamically decoupled systems via distributed model predictive control. *Int J Rob Nonl Contr*, 22(12):1376-1397. <https://doi.org/10.1002/rnc.2826>
- Rosolia U, Carvalho A, Borrelli F, 2017. Autonomous racing using learning model predictive control. American Control Conf, p.5115-5120. <https://doi.org/10.23919/ACC.2017.7963748>
- Su YX, Shi Y, Sun CY, 2019a. Distributed model predictive control for tracking consensus of linear multiagent systems with additive disturbances and time-varying communication delays. *IEEE Trans Cybern*, 49(7):3813-3823. <https://doi.org/10.1109/TCYB.2019.2939732>
- Su YX, Wang QL, Sun CY, 2019b. Self-triggered robust model predictive control for nonlinear systems with bounded disturbances. *IET Contr Theor Appl*, 13(9):1336-1343. <https://doi.org/10.1049/iet-cta.2018.5459>
- Summers TH, Lygeros J, 2012. Distributed model predictive consensus via the alternating direction method of multi-

- pliers. Proc 5<sup>th</sup> Annual Allerton Conf on Communication, Control, and Computing, p.79-84.  
<https://doi.org/10.1109/Allerton.2012.6483202>
- Wan XX, Yang XS, Tang RQ, et al., 2019. Exponential synchronization of semi-Markovian coupled neural networks with mixed delays via tracker information and quantized output controller. *Neur Netw*, 118:321-331.  
<https://doi.org/10.1016/j.neunet.2019.07.004>
- Xi F, He J, Liu Z, 2010. Adaptive fast consensus algorithm for distributed sensor fusion. *Signal Process*, 90(5):1693-1699. <https://doi.org/10.1016/j.sigpro.2009.11.020>
- Xu C, Yang XS, Lu JQ, et al., 2018. Finite-time synchronization of networks via quantized intermittent pinning control. *IEEE Trans Cybern*, 48(10):3021-3027.  
<https://doi.org/10.1109/TCYB.2017.2749248>
- Yang XS, Cao JD, Xu C, et al., 2018. Finite-time stabilization of switched dynamical networks with quantized couplings via quantized controller. *Sci China Technol Sci*, 61(2):299-308.  
<https://doi.org/10.1007/s11431-016-9054-y>
- Zhan JY, Li X, 2013. Consensus of sampled-data multi-agent networking systems via model predictive control. *Automatica*, 49(8):2502-2507.  
<https://doi.org/10.1016/j.automatica.2013.04.037>
- Zhan JY, Jiang ZP, Wang YB, et al., 2019a. Distributed model predictive consensus with self-triggered mechanism in general linear multiagent systems. *IEEE Trans Ind Inform*, 15(7):3987-3997.  
<https://doi.org/10.1109/TII.2018.2884449>
- Zhan JY, Chen YZ, Aleksandrov A, et al., 2019b. Robust distributed model predictive control based consensus of general linear multi-agent systems. *IEEE Int Symp on Circuits and Systems*, p.1-5.  
<https://doi.org/10.1109/ISCAS.2019.8702724>
- Zheng Y, Li SY, Qiu H, 2013. Networked coordination-based distributed model predictive control for large-scale system. *IEEE Trans Contr Syst Technol*, 21(3):991-998.  
<https://doi.org/10.1109/TCST.2012.2196280>
- Zou WC, Xiang ZR, 2019. Event-triggered leader-following consensus of non-linear multi-agent systems with switched dynamics. *IET Contr Theor Appl*, 13(9):1222-1228. <https://doi.org/10.1049/iet-cta.2018.5126>
- Zou WC, Shi P, Xiang ZR, et al., 2020a. Consensus tracking control of switched stochastic nonlinear multiagent systems via event-triggered strategy. *IEEE Trans Neur Netw Learn Syst*, 31(3):1036-1045.  
<https://doi.org/10.1109/TNNLS.2019.2917137>
- Zou WC, Huang YY, Ahn CK, et al., 2020b. Containment control of linear multiagent systems with stochastic disturbances via event-triggered strategies. *IEEE Syst J*, 14(4):4810-4819.  
<https://doi.org/10.1109/JSYST.2020.2975247>
- Zou YY, Su X, Niu YG, 2017. Event-triggered distributed predictive control for the cooperation of multi-agent systems. *IET Contr Theor Appl*, 11(1):10-16.  
<https://doi.org/10.1049/iet-cta.2016.0638>