



Event-triggered distributed optimization for model-free multi-agent systems*#

Shanshan ZHENG¹, Shuai LIU^{†1}, Licheng WANG²

¹College of Science, University of Shanghai for Science and Technology, Shanghai 200093, China

²College of Automation Engineering, Shanghai University of Electric Power, Shanghai 200090, China

E-mail: zhengss0904@163.com; liushuai871030@163.com; wanglicheng1217@163.com

Received Aug. 22, 2023; Revision accepted Oct. 17, 2023; Crosschecked Nov. 6, 2023; Published online Dec. 12, 2023

Abstract: In this paper, the distributed optimization problem is investigated for a class of general nonlinear model-free multi-agent systems. The dynamical model of each agent is unknown and only the input/output data are available. A model-free adaptive control method is employed, by which the original unknown nonlinear system is equivalently converted into a dynamic linearized model. An event-triggered consensus scheme is developed to guarantee that the consensus error of the outputs of all agents is convergent. Then, by means of the distributed gradient descent method, a novel event-triggered model-free adaptive distributed optimization algorithm is put forward. Sufficient conditions are established to ensure the consensus and optimality of the addressed system. Finally, simulation results are provided to validate the effectiveness of the proposed approach.

Key words: Distributed optimization; Multi-agent systems; Model-free adaptive control; Event-triggered mechanism

<https://doi.org/10.1631/FITEE.2300568>

CLC number: TP391.4

1 Introduction

Recently, the distributed coordination of multi-agent systems (MASs) has been widely applied in various practical engineering fields, such as smart grids (Mao et al., 2021), automated vehicles (Xie et al., 2022; Ge et al., 2023a; Zhang XM et al., 2023), and distributed filtering (Chen et al., 2022; Liu S et al., 2022). Generally speaking, MASs are composed of interacting individual agents that work collaboratively under certain protocols to handle complicated problems. During the past decades, the analysis, control, and optimization of MASs have emerged as popular research areas and have at-

tracted considerable research attention. Among the research topics of MASs, the consensus is a fundamental problem whose main purpose is to develop some control methods to propel all agents' states to a common value (Chen et al., 2020; Ju et al., 2022; Li and Wei, 2022; Zhang QC and Zhou, 2022; Ning et al., 2023; Zhang WJ et al., 2023).

For the consensus issue of MASs, it is commonly recognized that the dynamics of agents is available. However, due to the ever-increasing complexity of engineering systems, it is usually difficult and even impossible to establish precise dynamical models of each agent, and this is particularly true for practical MASs that exhibit complicated characteristics including high order, strong nonlinearity, and tight coupling. This gives rise to the model-free MASs whose analysis and synthesis topics have drawn preliminary academic attention. Because the explicit system model is ambiguous and the availability of information regarding system dynamics is confined

[†] Corresponding author

* Project supported by the National Natural Science Foundation of China (No. 62003213)

Electronic supplementary materials: the online version of this article (<https://doi.org/10.1631/FITEE.2300568>) contains supplementary materials, which are available to authorized users

ORCID: Shuai LIU, <https://orcid.org/0000-0003-0523-022X>

© Zhejiang University Press 2023

to merely input/output (I/O) data, the quest for the means to design an effective model-free control approach by using the I/O data is a rather challenging problem. To address this problem, data-driven control methods have been developed in the past decades, among which the model-free adaptive control (MFAC) method is a representative data-driven approach. Different from traditional model-free methods that require identification of unknown nonlinear models, MFAC employs a novel dynamic linearization technique, based on which the general nonlinear system is equivalently converted into a dynamic linearized model. Owing to their advantages in dealing with the nonlinearities, MFAC algorithms have received ever-growing research interest, with a large number of results both in the theoretical analysis (Hou and Jin, 2011a, 2011b; Bu et al., 2018; Hou and Xiong, 2019; Wang XL et al., 2022; Zhu QM et al., 2023) and practical applications including intelligent transportation (Liu SD et al., 2019), aircraft control (Ye et al., 2022), and medical device control (Fetanat et al., 2020; Pinto et al., 2022).

In certain engineering applications of MASs, we not only are concerned with collaborative behaviors (e.g., consensus, flocking, and swarming), but also take the economic point of view into account (e.g., operation cost and resource utilization efficiency), which can be concluded as the optimization problem for MASs. The optimization problem for MASs is considered in light of various objectives of individual agents, and the main purpose of adopting this approach is the designing of certain optimization approaches that would enable a globally optimal solution to be achieved. For existing optimization schemes for MASs, there are two representative optimization approaches, namely, the centralized optimization and the distributed optimization. Under the context of the issue of distributed optimization, agents communicate with their neighboring agents by only using the local information exchange and make the optimal decisions through collaborative efforts. Although the centralized optimization scheme might achieve a better performance compared with the distributed optimization approach, it is quite sensitive to network connectivity and is more computationally intensive. When it comes to the case wherein the system scale becomes large, together with the quantum of resources available for computation being limited, such a centralized optimization

method is rendered inapplicable. Therefore, the distributed optimization for MASs has been an active research topic that has found extensive applications in parameter estimation of energy configuration (Martins and Oleskovicz, 2022; Yu et al., 2022), communication network (Luo et al., 2023; Zhu WB and Wang, 2023), and economic dispatch of smart grid (Mao et al., 2021; Wang LC et al., 2022b).

For distributed optimization problems, it is essential to establish an effective optimization algorithm. Moreover, the dynamics of the agents and the corresponding communication topology play a crucial role in evaluating the performance of optimization algorithms. Up to now, plenty of classic algorithms have been devoted to various distributed optimization problems, involving both the undirected and directed communication topologies, and these studies have served as a basis for subsequent works (Nedic and Ozdaglar, 2009; Nedić and Olshevsky, 2015; Lu and Tang, 2012; Shi et al., 2014). In addition, much research effort has been put forward for different types of agent's dynamical models (e.g., double-integrator systems, linear systems, and Euler-Lagrangian systems) (Hu et al., 2020; Huang and Meng, 2022; Cui et al., 2023). However, the aforementioned results are built on the basis that the dynamics of agents is precise and known a priori, which unfortunately is usually unrealistic to fulfill in practice. As a consequence, how to develop an optimization algorithm without acquiring accurate system dynamics is of both theoretical significance and practical necessity.

It is worth mentioning that for the purpose of achieving certain collaborative tasks, the data exchange among agents is inevitable. However, in numerous practical applications especially for the digital-communication-based MASs, it is often the case that the communication resource is limited, which means that frequent communication is unrealistic (Wang LC et al., 2022a, 2023). In this case, it is crucial to alleviate communication burden. Recently, the event-triggered (ET) mechanism has been employed in state estimation/control/optimization problems due mainly to its advantage of efficient resource usage (Ge et al., 2022; Liu ZQ et al., 2022; Ma et al., 2022). A thorough literature search has revealed that the ET scheme has hardly been applied to model-free MASs, not mentioning the corresponding distributed optimization problem, which

motivates us to fill this gap.

Building on the aforementioned discussions, in this paper, the ET distributed optimization problem for model-free multiple-input multiple-output (MIMO) MASs has been investigated. This is by no means a trivial task due primarily to the following challenges: (1) How to develop an ET mechanism for the model-free MASs? (2) How to embed the MFAC scheme into the distributed optimization algorithm? (3) How to conduct effective analysis guaranteeing the convergence of the addressed MAS?

In view of the above issues, we endeavor to propose a novel event-triggered model-free adaptive distributed optimization (ET-MFADO) algorithm, by which the consensus performance of MASs is achieved and the optimality of the global objective function is ensured. The main contributions of this study are summarized as follows:

1. A novel ET-MFADO algorithm is proposed to derive the optimal solution of the global objective function for nonlinear MIMO MASs.
2. Compared with existing results, the data-driven ET-MFAC strategy is successfully embedded into the distributed optimization algorithm for model-free-based MASs.
3. Sufficient conditions are established to address the convergence of both the consensus performance and the proposed optimization algorithm.

Notations: Let \mathbb{R}^n and $\mathbb{R}^{p \times q}$ denote the n -dimensional Euclidean space and the set of all $p \times q$ real matrices, respectively. The Kronecker product of matrices A and B is described as $A \otimes B$. A^T represents the transpose of A . $\rho_{\min}\{A\}$ refers to the minimum eigenvalue of matrix A . For a vector x and a matrix X , $\|x\|$ and $\|X\|$ denote the Euclidean norm and the Frobenius norm, respectively. $\text{sign}(x)$ is called a sign function. $\text{diag}\{\cdot\}$ stand for a block-diagonal matrix. A column vector $[a_1^T \ a_2^T \ \dots \ a_N^T]^T$ is defined as $\text{col}_N\{a_i\}$. \mathbb{N} stands for the set of natural numbers.

2 Preliminaries and problem formulation

2.1 Preliminaries

For any vectors $x, y \in \mathbb{R}^n$, function $f(\cdot) : \mathbb{R}^n \rightarrow \mathbb{R}$ is called a convex function if the following condi-

tion is satisfied:

$$f(y) - f(x) \geq \nabla f^T(x)(y - x),$$

where $\nabla f(\cdot) \in \mathbb{R}^n$ denotes the gradient of function $f(\cdot)$.

A weighted undirected graph can be described as $\mathcal{G} \triangleq \{\mathcal{V}, \mathcal{E}, \mathcal{A}\}$, where $\mathcal{V} \triangleq \{1, 2, \dots, N\}$ is the node set containing N agents, $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$ is a set of edges, and $\mathcal{A} \triangleq [a_{ij}] \in \mathbb{R}^{N \times N}$ represents the weighted adjacency matrix of the graph. If agent i can acquire information from agent j , it means that there is a path from agent j to agent i , $(j, i) \in \mathcal{E}$, and j is called a neighbor of agent i . The set of neighbors of agent i is denoted by $\mathcal{N}_i \triangleq \{j \in \mathcal{V} \mid (j, i) \in \mathcal{E}\}$. In this case, $a_{ij} = a_{ji} > 0$ if and only if $(i, j) \in \mathcal{E}$, and $a_{ij} = 0$ otherwise. The Laplacian matrix of graph \mathcal{G} is defined as $L \triangleq \mathcal{A} - \mathcal{D}$, where $\mathcal{D} \triangleq \text{diag}\{d_1, d_2, \dots, d_N\}$ is an in-degree matrix with $d_i = \sum_{j \in \mathcal{N}_i} a_{ij}$.

2.2 Problem formulation

Consider a nonlinear MAS composed of N agents, in which the MIMO system, given the following, describes the dynamics of agent i :

$$y_i(h+1) = g_i(y_i(h), u_i(h)), \quad i = 1, 2, \dots, N, \quad (1)$$

where $y_i(h) \in \mathbb{R}^n$ is the measurement output of agent i whose value is available at time step h , and $u_i(h) \in \mathbb{R}^n$ is the control input of agent i . $g_i(\cdot, \cdot) : \mathbb{R}^n \times \mathbb{R}^n \rightarrow \mathbb{R}^n$ is an unknown nonlinear vector-valued function of agent i .

To facilitate our analysis, some assumptions are proposed for nonlinear system (1).

Assumption 1 The partial derivative of nonlinear function $g_i(x, y)$ is continuous with respect to y .

Assumption 2 System (1) satisfies the generalized Lipschitz condition; that is, for any nonzero vector $\Delta u_i(h) \triangleq u_i(h) - u_i(h-1)$, one has $\|\Delta y_i(h+1)\| \leq m \|\Delta u_i(h)\|$ with $\Delta y_i(h+1) \triangleq y_i(h+1) - y_i(h)$ and m being a known positive scalar.

Remark 1 It should be mentioned that the above assumptions are quite common in engineering applications. In particular, Assumption 1 is actually a mild constraint on the system nonlinearity. The system output signal's change rate is capped by Assumption 2 at an upper limit, which is a crucial and reasonable requirement for a broad range of practical

systems including the MASs (Tan et al., 2022), the interconnected microgrid systems (Zhang HG et al., 2017), and the implantable heart pump systems (Fetanat et al., 2020).

On the basis of the above assumptions, we are in a position to introduce the following valuable lemma, which plays an important role in the subsequent design of the MFAC scheme:

Lemma 1 (Hou and Jin, 2011a) Given that MAS (1) satisfies Assumptions 1 and 2, if $\|u_i(h)\| \neq 0$ holds, then system (1) is equivalently converted into the dynamic linearization model as follows:

$$\Delta y_i(h + 1) = \mathcal{U}_i(h)\Delta u_i(h), \quad i = 1, 2, \dots, N, \quad (2)$$

where

$$\mathcal{U}_i(h) \triangleq \begin{bmatrix} \varpi_{i,11}(h) & \varpi_{i,12}(h) & \cdots & \varpi_{i,1n}(h) \\ \varpi_{i,21}(h) & \varpi_{i,22}(h) & \cdots & \varpi_{i,2n}(h) \\ \vdots & \vdots & & \vdots \\ \varpi_{i,n1}(h) & \varpi_{i,n2}(h) & \cdots & \varpi_{i,nn}(h) \end{bmatrix}$$

is called the pseudo-partial-derivative (PPD) matrix and satisfies $\|\mathcal{U}_i(h)\| \leq m$.

With the help of such an equivalent transformation, it is ensured that there is no loss of system information during the linearization process, so that there is no theoretical modeling error between Eqs. (1) and (2).

2.3 Distributed optimization

In this subsection, the distributed optimization problem associated with MAS (1) is formulated as follows:

$$\min_{x \in \mathbb{R}^n} f(x) = \sum_{i=1}^N f_i(x), \quad (3)$$

where $f_i : \mathbb{R}^n \rightarrow \mathbb{R}$ is a local convex cost function of agent i , $i \in \mathcal{V}$. $f^* \triangleq \min_{x \in \mathbb{R}^n} f(x^*)$ and $x^* \triangleq \arg \min_{x \in \mathbb{R}^n} f(x)$ are defined as the global optimal value of optimization problem (3) and the solution that minimizes the global objective function, respectively.

To guarantee that convex optimization problem (3) has a unique optimal solution, the following assumptions are given:

Assumption 3 The gradient of each local objective function $f_i(\cdot)$ is bounded; that is, there exists a positive scalar d such that for $i \in \mathcal{V}$, $\|\nabla f_i(\cdot)\| \leq d$.

Assumption 4 The diminishing step-size $\alpha(h)$ is a positive sequence satisfying the following conditions:

$$\sum_{h=0}^{\infty} \alpha(h) = \infty, \quad \sum_{h=0}^{\infty} \alpha^2(h) < \infty, \quad \alpha(h) \leq \alpha(\varsigma), \quad (4)$$

for all $h > \varsigma \geq 0$.

2.4 Event-triggered mechanism

For the sake of saving communication resource, the ET mechanism is employed to reduce the quanta of data necessitated by communication among agents and their neighbors. To be specific, $0 \leq h_0^i < h_1^i < h_2^i < \dots < h_s^i < \dots$ represents the series of triggering instants of agent i , which is iteratively determined by the following rule:

$$h_{s+1}^i = \inf\{h \in \mathbb{N} | h > h_s^i, \Gamma_i(e_i(h), \theta_i) > 0\}, \quad (5)$$

where the event generator function $\Gamma_i(e_i(h), \theta_i)$ is defined as follows:

$$\Gamma_i(e_i(h), \theta_i) \triangleq e_i^T(h)e_i(h) - \theta_i. \quad (6)$$

Here, $e_i(h) \triangleq \tilde{y}_i(h_s^i) - \tilde{y}_i(h)$, h_s^i is the latest triggering instant of agent i corresponding to sampling instant h , and threshold θ_i is a positive scalar to design. It is obvious that the triggering instant h_s^i updates when condition $\Gamma_i(e_i(h), \theta_i) > 0$ is satisfied.

Remark 2 To determine whether there prevails a necessity of triggering an event, the controller evaluates, at each operating moment, whether the sampling error surpasses a predetermined threshold. When ET condition (6) is satisfied, the control signal is updated and sent to the actuator to make the error return to zero. Otherwise, the system input remains at its current value. It should be noted that the trigger condition will not continue to be satisfied indefinitely as long as there is a lower bound on the sampling period. As a result, the ET mechanism that has been designed can avoid Zeno behavior.

Before proceeding further, the following definitions and lemmas are introduced first. Denoting $\tilde{y}_i(h) \triangleq \bar{y}(h) - y_i(h)$ by the consensus error of agent i , we then obtain the augmented consensus error dynamics as $\tilde{y}(h) \triangleq \text{col}_N\{\tilde{y}_i(h)\}$.

Definition 1 The closed-loop system (1) is said to be ultimately consensusable, if the augmented consensus error dynamics satisfies

$$\lim_{h \rightarrow \infty} \|\bar{y}(h) - y_i(h)\| = \lim_{h \rightarrow \infty} \|\tilde{y}_i(h)\| = 0, \quad \forall i \in \mathcal{V}, \quad (7)$$

where $\bar{y}(h) \triangleq \frac{1}{N} \sum_{i=1}^N y_i(h) \in \mathbb{R}^n$ is the average state of all agents.

Definition 2 The output trajectories $y_i(h)$ of MAS (1) converge to the optimal solution y^* if the following condition is met:

$$\lim_{h \rightarrow \infty} \|y^* - y_i(h)\| = 0, \forall i \in \mathcal{V}. \quad (8)$$

Lemma 2 (Polyak, 1987) Let $\{t(h)\}$, $\{\pi(h)\}$, and $\{\epsilon(h)\}$ be three nonnegative scalar sequences that satisfy $\epsilon(h) \geq 0$, $\pi(h) \leq 1$, $\sum_{h=0}^{\infty} \pi(h) = \infty$, and $\lim_{h \rightarrow \infty} \frac{\epsilon(h)}{\pi(h)} = 0$, such that

$$t(h+1) \leq (1 - \pi(h))t(h) + \epsilon(h) \quad (9)$$

for all $h \in \mathbb{N}$. Then, $\lim_{h \rightarrow \infty} t(h) = 0$.

Lemma 3 (Nedić and Olshevsky, 2015) Let $\{\varrho(h)\}$ be a nonnegative scalar sequence. If there exist scalars $\vartheta(h) \geq 0$, $\varphi(h) \geq 0$, and $\phi(h) \geq 0$ satisfying $\sum_{h=0}^{\infty} \vartheta(h) < \infty$ and $\sum_{h=0}^{\infty} \phi(h) < \infty$, such that

$$\varrho(h+1) \leq (1 + \vartheta(h))\varrho(h) - \varphi(h) + \varpi(h) \quad (10)$$

for all $h \in \mathbb{N}$, then the sequence $\varrho(h)$ converges to 0, namely, $\lim_{h \rightarrow \infty} \varrho(h) = 0$ and $\sum_{h=0}^{\infty} \varphi(h) < \infty$.

Lemma 4 (Hardy et al., 1952) Given any $x, y \in \mathbb{R}^n$, for any scalar $\ell > 0$, the following inequality holds:

$$x^T y \leq \frac{x^T x}{2\ell} + \frac{\ell y^T y}{2}. \quad (11)$$

To summarize, the primary goal is to design an MFAC scheme $u_i(h)$ for MAS (1) under ET communication mechanism (5), in such a way that the following two requirements are simultaneously satisfied:

(1) The closed-loop system (1) is ultimately consensusable;

(2) The output trajectories $y_i(h)$ of MAS (1) converge to the optimal solution y^* .

3 Main results

In this section, the ET-MFADO algorithm is proposed by using the MFAC method, considering communication resource constraints. Then, we discuss the convergence of both the consensus performance and the proposed optimization algorithm for MAS (1).

3.1 Algorithm design

1. The traditional distributed MFAC. In engineering practice, it is usually difficult to determine the exact value of $\mathcal{U}_i(h)$ in Eq. (2). Thus, an alternative way is to develop a certain estimation algorithm to obtain an estimate of $\mathcal{U}_i(h)$ by using the I/O data (i.e., $u_i(h)$ and $y_i(h)$). In this sense, the following distributed MFAC scheme is designed:

The following performance index functions are introduced:

$$J(\hat{\mathcal{U}}_i(h)) = \|\Delta y_i(h) - \mathcal{U}_i(h) \Delta u_i(h-1)\|^2 + \nu \|\hat{\mathcal{U}}_i(h) - \hat{\mathcal{U}}_i(h-1)\|^2, \quad (12)$$

$$J(u_i(h)) = |\xi_i(h)|^2 + \mu \|u_i(h) - u_i(h-1)\|^2. \quad (13)$$

We differentiate Eqs. (12) and (13) with respect to $\hat{\mathcal{U}}_i(h)$ and $u_i(h)$, respectively, and let them equal to 0.

Then, we have

$$\hat{\mathcal{U}}_i(h) = \begin{cases} \begin{cases} [\hat{\varpi}_{i,jl}]_{n \times n}, & \text{if } |\hat{\varpi}_{i,jl}(h)| < m_2, j = l, \\ & \text{or } |\hat{\varpi}_{i,jl}(h)| > am_2, j = l, \\ & \text{or } |\hat{\varpi}_{i,jl}(h)| > m_1, j \neq l, \\ & \text{or } \text{sign}(\hat{\varpi}_{i,jl}(h)) \neq \text{sign}(\hat{\varpi}_{i,jl}), \end{cases} \\ \hat{\mathcal{U}}_i(h-1) \\ + \left(\Delta y_i(h) - \hat{\mathcal{U}}_i(h-1) \Delta u_i(h-1) \right) \\ \cdot \frac{\gamma \Delta u_i^T(h-1)}{\nu + \|\Delta u_i(h-1)\|^2}, \quad \text{otherwise,} \end{cases} \quad (14)$$

$$u_i(h) = u_i(h-1) + P_i(h) \xi_i(h), \quad (15)$$

where $\hat{\mathcal{U}}_i(h) \triangleq [\hat{\varpi}_{i,jl}(h)]_{n \times n}$ is the estimate of $\mathcal{U}_i(h)$, $P_i(h) = \frac{\lambda \hat{\mathcal{U}}_i^T(h)}{\mu + \|\hat{\mathcal{U}}_i(h)\|^2}$, and $\xi_i(h) \triangleq \sum_{j \in \mathcal{N}_i} a_{ij} (y_j(h) - y_i(h))$. $\gamma, \lambda \in (0, 1)$ are the step sizes, and $\nu, \mu > 0$ are weighted factors. $\hat{\varpi}_{i,jl}(h)$ is an estimate of $\varpi_{i,jl}(h)$ and $\hat{\varpi}_{i,jl}$ is the given initial value of $\hat{\varpi}_{i,jl}(h)$ with $j, l = 1, 2, \dots, n$, $a > 1$, and $m_2 > m_1 > 0$.

Remark 3 It follows from Lemma 1 that nonlinear MAS (1) can be converted into linearized model (2). Moreover, the update of parameter estimate (14) and control scheme (15) are obtained by minimizing two performance indicators that have been defined in Bu et al. (2018). For details, readers can refer to Bu et al. (2018) and the references therein.

2. The ET-MFADO. To better study the distributed optimization problem, we introduce a gradient variable for control input $u_i(h)$. The ET-MFADO algorithm is given as follows:

Case 1: $h = h_s^i$.

$$\hat{U}_i(h) = \begin{cases} \begin{cases} [\hat{\omega}_{i,jl}]_{n \times n}, & \text{if } |\hat{\omega}_{i,jl}(h_s^i)| < m_2, j = l, \\ & \text{or } |\hat{\omega}_{i,jl}(h_s^i)| > am_2, j = l, \\ & \text{or } |\hat{\omega}_{i,jl}(h_s^i)| > m_1, j \neq l, \\ & \text{or } \text{sign}(\hat{\omega}_{i,jl}(h_s^i)) \neq \text{sign}(\hat{\omega}_{i,jl}), \end{cases} \\ \hat{U}_i(h_s^i - 1) \\ + (\Delta y_i(h_s^i) - \hat{U}_i(h_s^i - 1)\Delta u_i(h_s^i - 1)) \\ \cdot \frac{\gamma \Delta u_i^T(h_s^i - 1)}{\nu + \|\Delta u_i(h_s^i - 1)\|^2}, & \text{otherwise,} \end{cases} \quad (16)$$

$$u_i(h) = u_i(h_s^i - 1) + \beta(h)P_i(h)\xi_i(h_s^i) - \tilde{d}_i(h - 1). \quad (17)$$

Case 2: $h \in (h_s^i, h_{s+1}^i)$.

$$\begin{cases} \hat{U}_i(h) = \hat{U}_i(h_s^i), \\ u_i(h) = u_i(h - 1) + \beta(h)P_i(h)\xi_i(h_s^i) - \tilde{d}_i(h - 1), \end{cases} \quad (18)$$

where $\tilde{d}_i(h) = \alpha(h)d_i(h)$, $d_i(h)$ is the gradient of the i^{th} local objective function $f_i(\cdot)$, and $\beta(h)$ is a positive sequence satisfying the following conditions: (1) $\beta(h + 1) \leq \beta(h) \leq 1$; (2) $\lim_{h \rightarrow \infty} \beta(h) = 0$ and $\sum_{h=1}^{\infty} \beta^2(h) < \infty$.

3.2 Consensus analysis

At the level of MASs, some system states can be described as the following column vectors:

$$\begin{cases} y(h) \triangleq \text{col}_N\{y_i(h)\}, \\ u(h) \triangleq \text{col}_N\{u_i(h)\}, \\ \xi(h) \triangleq \text{col}_N\{\xi_i(h)\}, \\ \tilde{y}(h) \triangleq \text{col}_N\{\tilde{y}_i(h)\}, \\ e(h) \triangleq \text{col}_N\{e_i(h)\}, \\ \tilde{d}(h) \triangleq \text{col}_N\{\tilde{d}_i(h)\}, \\ y_d(h) \triangleq \text{col}_N\{y_d(h)\}. \end{cases} \quad (19)$$

$\xi_i(h)$, in the research of MASs, represents the state information that can be obtained from each agent and the neighboring agents, as expressed by the following:

$$\xi_i(h_s^i) = \sum_{j \in \mathcal{N}_i} a_{ij}(\tilde{y}_i(h_s^i) - \tilde{y}_j(h_s^i)). \quad (20)$$

In combination with Eq. (6), one can deduce that

$$\xi_i(h_s^i) = \sum_{j \in \mathcal{N}_i} a_{ij}[(\tilde{y}_i(h) - \tilde{y}_j(h)) + (e_i(h) - e_j(h))]. \quad (21)$$

Then, Eq. (21) can be reformulated as the following form:

$$\xi(h_s^i) = (-L \otimes I_n)(\tilde{y}(h) + e(h)), \quad (22)$$

where L is the Laplacian matrix and I_n is an $n \times n$ identity matrix.

In what follows, from Eq. (2), the average consensus error is reformulated as

$$\tilde{y}_i(h + 1) = \tilde{y}_i(h) - \mathcal{U}_i(h)\Delta u_i(h) + (\bar{y}(h + 1) - \bar{y}(h)). \quad (23)$$

According to control input update algorithm (18), Eq. (23) can be reformulated as

$$\begin{aligned} \tilde{y}_i(h + 1) = & \tilde{y}_i(h) + (\bar{y}(h + 1) - \bar{y}(h)) - \mathcal{U}_i(h) \\ & \cdot (\beta(h)P_i(h)\xi(h_s^i) - \tilde{d}_i(h - 1)). \end{aligned} \quad (24)$$

By means of augmentation operation, one obtains the following compact system:

$$\begin{aligned} \tilde{y}(h + 1) = & \tilde{y}(h) - Q(h)[\beta(h)P(h)(-L \otimes I_n) \\ & \cdot (\tilde{y}(h) + e(h)) - \tilde{d}(h - 1)] \\ & + (y_d(h + 1) - y_d(h)) \\ = & M(h)\tilde{y}(h) + Q(h)\tilde{d}(h - 1) \\ & + \eta(h + 1) + A(h)\beta(h)e(h), \end{aligned} \quad (25)$$

where $P(h) \triangleq \text{diag}\{P_1(h), P_2(h), \dots, P_N(h)\}$, $Q(h) \triangleq \text{diag}\{\mathcal{U}_1(h), \mathcal{U}_2(h), \dots, \mathcal{U}_N(h)\}$, $A(h) \triangleq Q(h)P(h)(L \otimes I_n)$, $M(h) \triangleq I_N \otimes I_n + \beta(h)A(h)$, and $\eta(h + 1) \triangleq y_d(h + 1) - y_d(h)$.

In the following theorem, the consensus of error system (25) with the proposed MFADO algorithm is investigated:

Theorem 1 Given Assumptions 1 and 2, let scalars $\nu, \mu > 0$, $\tau, \lambda, \gamma \in (0, 1)$, and matrices \bar{A} , \bar{M} , and \bar{Q} be known. MAS (1) is ultimately consensusable under the proposed algorithm in Eqs. (16)–(18) if there exist positive scalars ε_1 – ε_3 and ℓ_1 – ℓ_6 satisfying

$$\Pi_1 \triangleq \begin{bmatrix} \Pi_{11} & * & * & * \\ 0 & \check{\ell}_2 \bar{Q} - \varepsilon_1 I & * & * \\ 0 & 0 & (\check{\ell}_3 - \varepsilon_2) I & * \\ 0 & 0 & 0 & \check{\ell}_4 \bar{A} - \varepsilon_3 I \end{bmatrix} < 0, \quad (26)$$

where $\Pi_{11} \triangleq \check{\ell}_1 \bar{M} - (1 - \tau)I$, $\check{\ell}_1 \triangleq 1 + \ell_1 + \ell_2 + \ell_3$, $\check{\ell}_2 \triangleq 1 + \ell_1^{-1} + \ell_4 + \ell_6$, $\check{\ell}_3 \triangleq 1 + \ell_2^{-1} + \ell_4^{-1} + \ell_5$, and $\check{\ell}_4 \triangleq 1 + \ell_3^{-1} + \ell_5^{-1} + \ell_6^{-1}$.

Proof The proof of this theorem is provided in the supplementary materials.

3.3 Optimality analysis

After setting the consensus criterion for MAS (1) in Theorem 1, in this subsection, our primary attention will be focused on the distributed optimization problem (3). Based on the results obtained in Theorem 1, we aim to provide a sufficient condition for ensuring that the convergence of the output trajectories of MAS (1) is in an optimal manner.

Defining the optimization error $\hat{y}_i(h) \triangleq y^* - y_i(h)$, $\hat{y}(h) \triangleq [\hat{y}_1^T(h) \ \hat{y}_2^T(h) \ \dots \ \hat{y}_N^T(h)]^T$, $y_d^* \triangleq \text{col}_N\{y^*\}$, and $\delta(h) \triangleq y_d(h) - y_d^*$, based on the boundedness of $y_d(h)$ and y_d^* , it can be found that there exists a positive scalar l such that $\|\delta(h)\| \leq l$. In terms of Lemma 1, the transformed form of the optimization error dynamics is presented below:

$$\begin{aligned} \hat{y}_i(h+1) &= y^* - y_i(h+1) \\ &= y^* - y_i(h) - \mathcal{U}_i(h)\Delta u_i(h) \\ &= \hat{y}_i(h) - \mathcal{U}_i(h)\Delta u_i(h). \end{aligned} \quad (27)$$

According to the control input update algorithm (18), it is reasonable to reformulate Eq. (27) toward the following compact form:

$$\begin{aligned} \hat{y}(h+1) &= \hat{y}(h) - Q(h)[\beta(h)P(h)(-L \otimes I_n) \\ &\quad \cdot (\tilde{y}(h) + e(h)) - \tilde{d}(h-1)] \\ &= \hat{y}(h) - \beta(h)Q(h)P(h)(-L \otimes I_n) \\ &\quad \cdot (\hat{y}(h) + \delta(h) + e(h)) + Q(h)\tilde{d}(h-1) \\ &= M(h)\hat{y}(h) + Q(h)\tilde{d}(h-1) \\ &\quad + A(h)\beta(h)(\delta(h) + e(h)). \end{aligned} \quad (28)$$

Theorem 2 Given Assumptions 3 and 4, let scalars $\nu, \mu > 0$ and $0 < \lambda, \gamma < 1$ be known. The output trajectories $y_i(h)$ of MAS (1) converge to the optimal solution y^* under the proposed algorithm in Eqs. (16)–(18) if there exist positive scalars ω_1 – ω_3 and ℓ_7 – ℓ_{12} satisfying

$$\Pi_2 \triangleq \begin{bmatrix} \check{\ell}_5 \bar{M} - I & * & * & * \\ 0 & \check{\ell}_6 \bar{Q} - \omega_1 I & * & * \\ 0 & 0 & \check{\ell}_7 \bar{A} - \omega_2 I & * \\ 0 & 0 & 0 & \check{\ell}_8 \bar{A} - \omega_3 I \end{bmatrix} < 0, \quad (29)$$

where $\check{\ell}_5 \triangleq 1 + \ell_7 + \ell_8 + \ell_9$, $\check{\ell}_6 \triangleq 1 + \ell_7^{-1} + \ell_{10} + \ell_{12}$, $\check{\ell}_7 \triangleq 1 + \ell_8^{-1} + \ell_{10}^{-1} + \ell_{11}$, and $\check{\ell}_8 \triangleq 1 + \ell_9^{-1} + \ell_{11}^{-1} + \ell_{12}^{-1}$. Moreover, it holds that $\lim_{h \rightarrow \infty} \bar{y}(h) = y^*$.

Proof The proof of this theorem is provided in the supplementary materials.

Remark 4 So far, we have addressed the distributed optimization problem for model-free MASs under the ET mechanism. Compared with extensive literature, our main results exhibit the following two distinguishing features: (1) The designed ET-MFADO algorithm is novel since the data-driven ET-MFAC strategy is taken into account for model-free-based MASs; (2) The proposed algorithm can ensure the convergence of both the consensus and optimality performance under unknown model frameworks.

4 Simulation

In this section, a simulation example is executed to verify the validity of the provided ET-MFADO algorithm. This example focuses on a MIMO MAS composed of four agents, where each agent's dynamics is expressed as follows:

Agent 1:

$$\begin{cases} y_{11}(h+1) = -\frac{y_{11}(h)u_{11}(h)}{1+y_{11}^2(h)} + 1.5u_{11}(h), \\ y_{12}(h+1) = 0.3 \cos(y_{12}(h)) + 4.3u_{11}(h) - 5u_{12}(h). \end{cases} \quad (30)$$

Agent 2:

$$\begin{cases} y_{21}(h+1) = -\frac{y_{21}(h)u_{21}(h)}{1+y_{21}^3(h)} + 1.5u_{21}(h), \\ y_{22}(h+1) = 0.2 \sin(y_{22}(h)) - 2.2u_{21}(h) + 2u_{22}(h). \end{cases} \quad (31)$$

Agent 3:

$$\begin{cases} y_{31}(h+1) = -\frac{0.5y_{31}(h)u_{31}(h)}{1+y_{31}^5(h)} + 1.25u_{31}(h), \\ y_{32}(h+1) = 0.05 \cos(y_{32}(h)) + 1.1u_{31}(h) + 0.5u_{32}(h). \end{cases} \quad (32)$$

Agent 4:

$$\begin{cases} y_{41}(h+1) = -\frac{y_{41}(h)u_{41}(h)}{1+y_{41}^2(h)} - 1.5u_{41}(h), \\ y_{42}(h+1) = -0.1 \sin(y_{42}(h)) - 4.2u_{41}(h) + 2u_{42}(h). \end{cases} \quad (33)$$

$u_{ij}(h)$ and $y_{ij}(h)$ ($i = 1, 2, 3, 4, j = 1, 2$) represent the j^{th} input and output of the i^{th} agent, respectively.

It is worth noting that the mathematical models of the agents are unknown and the aforementioned model is used merely to produce I/O data. The communication topology of the addressed MAS is displayed in Fig. 1, and the following corresponding adjacency matrix is given:

$$\mathcal{A} = \begin{bmatrix} 0 & 0.1 & 0 & 0.1 \\ 0.1 & 0 & 0.1 & 0 \\ 0 & 0.1 & 0 & 0.1 \\ 0.1 & 0 & 0.1 & 0 \end{bmatrix}. \quad (34)$$

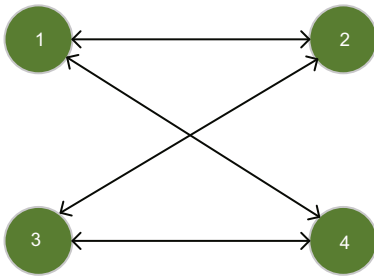


Fig. 1 The topology graph of the communication network

In this example, the controller parameters and the initial states are chosen as $\lambda = 0.001$, $\mu = 0.5$, $\nu = 0.8$, $\gamma = 0.5$, $\rho = 0.1$, $m_1 = 0.1$, $m_2 = 0.5$, $a = 2$, $c = 0.5$, $u_{ij}(1) = 0$, and $\hat{U}_i(1) = [0.5 \ 0.01; 0.01 \ 0.5]$. The trigger condition and the diminishing step sizes are set as $\theta = 0.008$, $\alpha(h) = \frac{1}{h+1}$, and $\beta(h) = \frac{1}{h}$.

For the given MAS, the optimization problem can be depicted as follows: $\min_{y \in \mathbb{R}^2} f(y(h)) = \sum_{i=1}^4 f_i(y(h))$, where the local objective function of each agent is represented by $f_i(y(h)) = z_i \|y(h) - y_i\|$ with $z_1 = 1$, $z_2 = 11$, $z_3 = 6$, $z_4 = 4$, $y_1 = [0.5 \ 0]$, $y_2 = [1 \ 2]$, $y_3 = [1 \ 0]$, and $y_4 = [-0.5 \ 0]$. By means of MATLAB software, we obtain the optimal solution to the convex optimization problem as $y^* = [1 \ 2]^T$ and the global optimal value is $f^* = 24.0616$.

The specific simulation results are displayed in Figs. 2–8. The average consensus error and the output trajectories of the system are given in Figs. 2–5. It is clearly visible that the consensus error is convergent and that the trajectories of the output signals $y_i(h)$ asymptotically converge to the optimal solution. Fig. 6 describes the error trajectories between the output and the optimal solution. Fig. 7 shows the error between $f(y^*)$ and $\sum_{i=1}^4 f_i(y_i(h))$. Furthermore, the triggering constants of the proposed

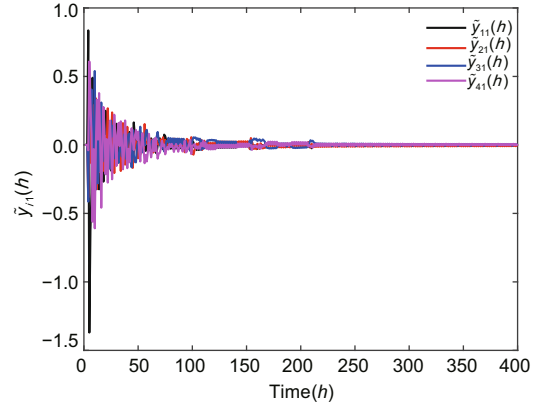


Fig. 2 The first component of the average consensus error $\tilde{y}_{i1}(h)$

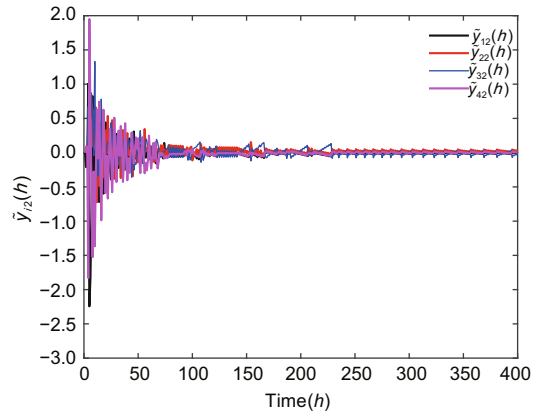


Fig. 3 The second component of the average consensus error $\tilde{y}_{i2}(h)$

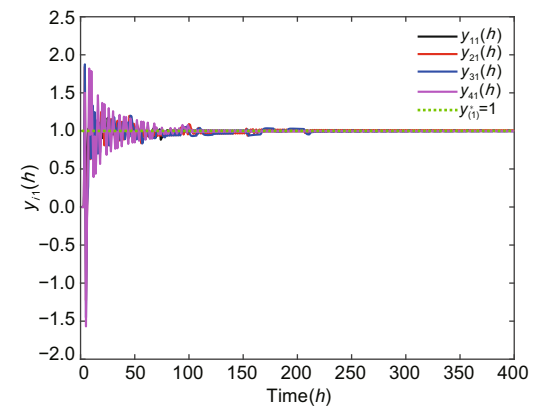


Fig. 4 Output trajectories of $y_{i1}(h)$

ET scheme are presented in Fig. 8. Obviously, when the ET scheme is employed, there is a perceptible reduction in the control update frequency, resultant to which the communication burden is alleviated.

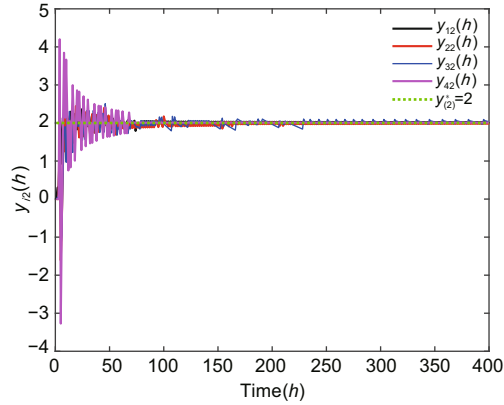


Fig. 5 Output trajectories of $y_{i2}(h)$

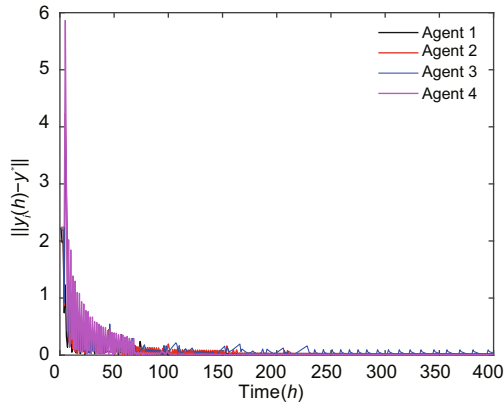


Fig. 6 Evolution of the output error $\|y_i(h) - y^*\|$

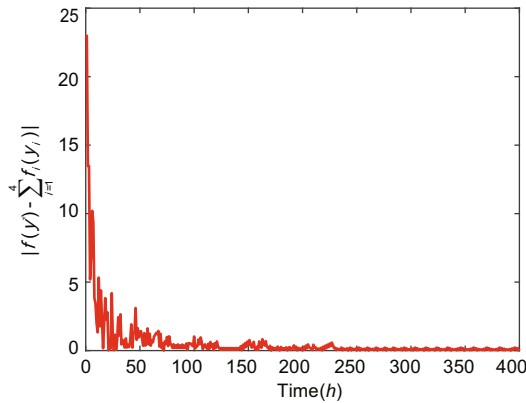


Fig. 7 Error of the optimal value $|f(y^*) - \sum_{i=1}^4 f_i(y_i)|$

5 Conclusions

In this paper, a novel ET-MFADO algorithm has been proposed to handle the distributed optimization problem for unknown nonlinear MASs under the ET mechanism. The dynamical linearization technique has been employed to equivalently convert the general nonlinear system into a dynamic linearized model, which overcomes the limitation of

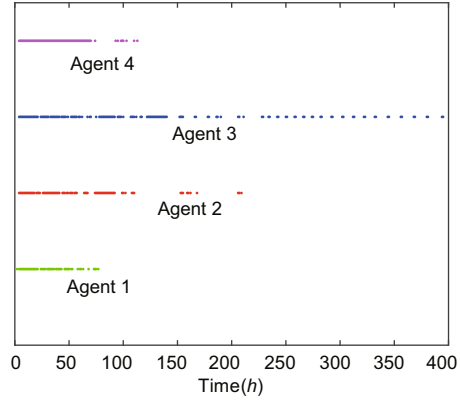


Fig. 8 Trigger time of each agent

unknown models. An ET mechanism has been presented to reduce the network communication burden and improve system performance. Some sufficient conditions have been implemented for the closed-loop system to achieve the required performance in light of the Lyapunov theory. Finally, a simulation example has been used to verify the effectiveness of the provided algorithm. Future research topics will extend our results to the model-free-based MASs with time-varying communication topology or the various practical engineering fields, such as multi-robot navigation (Chang et al., 2023) and automated vehicles (Ge et al., 2023b).

Contributors

Shanshan ZHENG designed the research and drafted the paper. Licheng WANG helped organize the paper. Shanshan ZHENG and Shuai LIU revised and finalized the paper.

Compliance with ethics guidelines

Shanshan ZHENG, Shuai LIU, and Licheng WANG declare that they have no conflict of interest.

Data availability

The data that support the findings of this study are available from the corresponding author upon reasonable request.

References

- Bu XH, Hou ZS, Zhang HW, 2018. Data-driven multiagent systems consensus tracking using model free adaptive control. *IEEE Trans Neur Netw Learn Syst*, 29(5):1514-1524. <https://doi.org/10.1109/TNNLS.2017.2673020>
- Chang L, Shan L, Zhang WL, et al., 2023. Hierarchical multi-robot navigation and formation in unknown environments via deep reinforcement learning and distributed optimization. *Robot Comput-Integr Manuf*, 83:102570. <https://doi.org/10.1016/j.rcim.2023.102570>

- Chen HW, Wang ZD, Liang JL, et al., 2020. State estimation for stochastic time-varying Boolean networks. *IEEE Trans Autom Contr*, 65(12):5480-5487. <https://doi.org/10.1109/TAC.2020.2973817>
- Chen HW, Wang ZD, Shen B, et al., 2022. Distributed recursive filtering over sensor networks with nonlogarithmic sensor resolution. *IEEE Trans Autom Contr*, 67(10):5408-5415. <https://doi.org/10.1109/TAC.2021.3115473>
- Cui QY, Liu KE, Ji ZJ, et al., 2023. Sampling-data-based distributed optimisation of second-order multi-agent systems with PI strategy. *Int J Syst Sci*, 54(6):1299-1312. <https://doi.org/10.1080/00207721.2023.2173541>
- Fetanat M, Stevens M, Hayward C, et al., 2020. A physiological control system for an implantable heart pump that accommodates for interpatient and inpatient variations. *IEEE Trans Biomed Eng*, 67(4):1167-1175. <https://doi.org/10.1109/TBME.2019.2932233>
- Ge XH, Xiao SY, Han QL, et al., 2022. Dynamic event-triggered scheduling and platooning control co-design for automated vehicles over vehicular ad-hoc networks. *IEEE/CAA J Autom Sin*, 9(1):31-46. <https://doi.org/10.1109/JAS.2021.1004060>
- Ge XH, Han QL, Wu Q, et al., 2023a. Resilient and safe platooning control of connected automated vehicles against intermittent denial-of-service attacks. *IEEE/CAA J Autom Sin*, 10(5):1234-1251. <https://doi.org/10.1109/JAS.2022.105845>
- Ge XH, Han QL, Zhang XM, et al., 2023b. Communication resource-efficient vehicle platooning control with various spacing policies. *IEEE/CAA J Autom Sin*, early access. <https://doi.org/10.1109/JAS.2023.123507>
- Hardy GH, Littlewood JE, Pólya G, 1952. *Inequalities* (2nd Ed.). Cambridge University Press, Cambridge, UK.
- Hou ZS, Jin ST, 2011a. Data-driven model-free adaptive control for a class of MIMO nonlinear discrete-time systems. *IEEE Trans Neur Netw*, 22(12):2173-2188. <https://doi.org/10.1109/TNN.2011.2176141>
- Hou ZS, Jin ST, 2011b. A novel data-driven control approach for a class of discrete-time nonlinear systems. *IEEE Trans Contr Syst Technol*, 19(6):1549-1558. <https://doi.org/10.1109/TCST.2010.2093136>
- Hou ZS, Xiong SS, 2019. On model-free adaptive control and its stability analysis. *IEEE Trans Autom Contr*, 64(11):4555-4569. <https://doi.org/10.1109/TAC.2019.2894586>
- Hu WF, Yang CH, Huang TW, et al., 2020. A distributed dynamic event-triggered control approach to consensus of linear multiagent systems with directed networks. *IEEE Trans Cybern*, 50(2):869-874. <https://doi.org/10.1109/TCYB.2018.2868778>
- Huang Y, Meng ZY, 2022. Fully distributed event-triggered optimal coordinated control for multiple Euler-Lagrangian systems. *IEEE Trans Cybern*, 52(9):9120-9131. <https://doi.org/10.1109/TCYB.2021.3057426>
- Ju YM, Ding DR, He X, et al., 2022. Consensus control of multi-agent systems using fault-estimation-in-the-loop: dynamic event-triggered case. *IEEE/CAA J Autom Sin*, 9(8):1440-1451. <https://doi.org/10.1109/JAS.2021.1004386>
- Li HY, Wei QL, 2022. Optimal synchronization control for multi-agent systems with input saturation: a nonzero-sum game. *Front Inform Technol Electron Eng*, 23(7):1010-1019. <https://doi.org/10.1631/FITEE.2200010>
- Liu S, Wang ZD, Wang LC, et al., 2022. Recursive set-membership state estimation over a FlexRay network. *IEEE Trans Syst Man Cybern Syst*, 52(6):3591-3601. <https://doi.org/10.1109/TSMC.2021.3071390>
- Liu SD, Hou ZS, Tian TT, et al., 2019. A novel dual successive projection-based model-free adaptive control method and application to an autonomous car. *IEEE Trans Neur Netw Learn Syst*, 30(11):3444-3457. <https://doi.org/10.1109/TNNLS.2019.2892327>
- Liu ZQ, Lou XY, Jia JJ, 2022. Event-triggered dynamic output-feedback control for a class of Lipschitz nonlinear systems. *Front Inform Technol Electron Eng*, 23(11):1684-1699. <https://doi.org/10.1631/FITEE.2100552>
- Lu J, Tang CY, 2012. Zero-gradient-sum algorithms for distributed convex optimization: the continuous-time case. *IEEE Trans Autom Contr*, 57(9):2348-2354. <https://doi.org/10.1109/TAC.2012.2184199>
- Luo Q, Liu S, Wang LC, et al., 2023. Privacy-preserved distributed optimization for multi-agent systems with antagonistic interactions. *IEEE Trans Circ Syst I Regular Papers*, 70(3):1350-1360. <https://doi.org/10.1109/TCSI.2022.3226578>
- Ma YS, Che WW, Deng C, 2022. Dynamic event-triggered model-free adaptive control for nonlinear CPSs under aperiodic DoS attacks. *Inform Sci*, 589:790-801. <https://doi.org/10.1016/j.ins.2022.01.009>
- Mao S, Dong ZW, Schultz P, et al., 2021. A finite-time distributed optimization algorithm for economic dispatch in smart grids. *IEEE Trans Syst Man Cybern Syst*, 51(4):2068-2079. <https://doi.org/10.1109/TSMC.2019.2931846>
- Martins PET, Oleskovicz M, 2022. Multi-objective optimization aiming to minimize the number of power quality monitors and multiple fault estimations in unbalanced power distribution systems. *IEEE Trans Power Delivery*, 37(2):1315-1323. <https://doi.org/10.1109/TPWRD.2021.3084074>
- Nedic A, Ozdaglar A, 2009. Distributed subgradient methods for multi-agent optimization. *IEEE Trans Autom Contr*, 54(1):48-61. <https://doi.org/10.1109/TAC.2008.2009515>
- Nedić A, Olshevsky A, 2015. Distributed optimization over time-varying directed graphs. *IEEE Trans Autom Contr*, 60(3):601-615. <https://doi.org/10.1109/TAC.2014.2364096>
- Ning BD, Han QL, Zuo ZY, et al., 2023. Fixed-time and prescribed-time consensus control of multiagent systems and its applications: a survey of recent trends and methodologies. *IEEE Trans Ind Inform*, 19(2):1121-1135. <https://doi.org/10.1109/TII.2022.3201589>
- Pinto ER, Nepomuceno EG, Campanharo ASLO, 2022. Individual-based modelling of animal brucellosis spread with the use of complex networks. *Int J Netw Dyn Intell*, 1(1):120-129. <https://doi.org/10.53941/ijndi0101011>
- Polyak BT, 1987. *Introduction to Optimization*. Optimization Software, New York, USA.

- Shi W, Ling Q, Yuan K, et al., 2014. On the linear convergence of the ADMM in decentralized consensus optimization. *IEEE Trans Signal Process*, 62(7):1750-1761. <https://doi.org/10.1109/TSP.2014.2304432>
- Tan HR, Wang YN, Wu M, et al., 2022. Distributed group coordination of multiagent systems in cloud computing systems using a model-free adaptive predictive control strategy. *IEEE Trans Neur Netw Learn Syst*, 33(8):3461-3473. <https://doi.org/10.1109/TNNLS.2021.3053016>
- Wang LC, Wang ZD, Zhao D, et al., 2022a. Event-based state estimation under constrained bit rate: an encoding-decoding approach. *Automatica*, 143:110421. <https://doi.org/10.1016/j.automatica.2022.110421>
- Wang LC, Tian EG, Wang CS, et al., 2022b. Secure estimation against malicious attacks for lithium-ion batteries under cloud environments. *IEEE Trans Circ Syst I Regular Papers*, 69(10):4237-4247. <https://doi.org/10.1109/TCSI.2022.3187725>
- Wang LC, Wang ZD, Zhao D, et al., 2023. Stabilization of linear discrete-time systems over resource-constrained networks under dynamical multiple description coding scheme. *Automatica*, 156:111160. <https://doi.org/10.1016/j.automatica.2023.111160>
- Wang XL, Sun Y, Ding DR, 2022. Adaptive dynamic programming for networked control systems under communication constraints: a survey of trends and techniques. *Int J Netw Dyn Intell*, 1(1):85-98. <https://doi.org/10.53941/ijndi0101008>
- Xie ML, Ding DR, Ge XH, et al., 2022. Distributed platooning control of automated vehicles subject to replay attacks based on proportional integral observers. *IEEE/CAA J Autom Sin*, early access. <https://doi.org/10.1109/JAS.2022.105941>
- Ye D, Xiao Y, Sun ZW, et al., 2022. Neural network based finite-time attitude tracking control of spacecraft with angular velocity sensor failures and actuator saturation. *IEEE Trans Ind Electron*, 69(4):4129-4136. <https://doi.org/10.1109/TIE.2021.3078349>
- Yu NX, Yang R, Huang MJ, 2022. Deep common spatial pattern based motor imagery classification with improved objective function. *Int J Netw Dyn Intell*, 1(1):73-84. <https://doi.org/10.53941/ijndi0101007>
- Zhang HG, Zhou JG, Sun QY, et al., 2017. Data-driven control for interlinked AC/DC microgrids via model-free adaptive control and dual-droop control. *IEEE Trans Smart Grid*, 8(2):557-571. <https://doi.org/10.1109/TSG.2015.2500269>
- Zhang QC, Zhou YY, 2022. Recent advances in non-Gaussian stochastic systems control theory and its applications. *Int J Netw Dyn Intell*, 1(1):111-119. <https://doi.org/10.53941/ijndi0101010>
- Zhang WJ, Zhang XF, Chang YJ, et al., 2023. Bipartite consensus of nonlinear multi-agent systems based on delayed output signals. *Int J Syst Sci*, 54(12):2485-2497. <https://doi.org/10.1080/00207721.2023.2231460>
- Zhang XM, Han QL, Ge XH, et al., 2023. Sampled-data control systems with non-uniform sampling: a survey of methods and trends. *Annu Rev Contr*, 55:70-91. <https://doi.org/10.1016/j.arcontrol.2023.03.004>
- Zhu QM, Li RB, Zhang JH, 2023. Model-free robust decoupling control of nonlinear nonaffine dynamic systems. *Int J Syst Sci*, 54(13):2590-2607. <https://doi.org/10.1080/00207721.2023.2245543>
- Zhu WB, Wang QL, 2023. Distributed finite-time optimisation of multi-agent systems with unknown high-frequency gain signs under switching digraphs. *Int J Syst Sci*, 54(5):1033-1046. <https://doi.org/10.1080/00207721.2022.2158446>

List of supplementary materials

- 1 Proof S1 Proof of Theorem 1
- 2 Proof S2 Proof of Theorem 2