



A digital simulation platform with human-interactive immersive design for navigation, motion and teleoperated manipulation of work-class remotely operated vehicle*

Fanghao HUANG^{†1,2}, Xiao YANG¹, Xuanlin CHEN¹, Deqing MEI^{1,2}, Zheng CHEN^{††1,2}

¹Ocean College, Zhejiang University, Zhoushan, 316021, China

²Key Laboratory of Intelligent Robot for Operation and Maintenance of Zhejiang Province, Hangzhou, 311121, China

[†]E-mail: huangfanghao@zju.edu.cn; zheng_chen@zju.edu.cn

Received June 6, 2024; Revision accepted Dec. 1, 2024; Crosschecked

Abstract: Digital simulation of the full operation of a remotely operated vehicle (ROV) is an economically feasible way to enable algorithm pretesting and operator training before actual underwater tasks, due to the huge difficulties encountered during underwater testing, high equipment cost, and the time-consuming nature of the process. In this paper, a human-interactive digital simulation platform is developed for the navigation, motion, and teleoperated manipulation of work-class ROVs, which provides the human operator with the visualized full operation process. Specially, two mechanisms are developed in this platform: one provides the virtual simulation platform for operator training, while the other provides real-time visual and force feedback when implementing the actual tasks. Moreover, an open data interface is designed for researchers to enable pretesting of various algorithms before the actual underwater tasks. Additionally, typical underwater scenarios of the ROV, including underwater sediment sampling and pipeline docking tasks, are selected as the case studies for hydrodynamics-based simulation; the human operator can operate the manipulator installed on the ROV via the master manipulator with the visual and force feedback after the ROV is navigated to the desired position. During the full operation, the dynamic windows approach (DWA)-based local navigation algorithm, sliding mode control (SMC) controller, and the teleoperation control framework are implemented to show the effectiveness of the proposed platform. Finally, a user study focused on the ROV operation mode is carried out, and several metrics are designed to evaluate the superiority and accuracy of the digital simulation platform for immersive underwater teleoperation.

Key words: Underwater teleoperation; Telepresence; Navigation and motion control; Virtual reality; Visual and force assistance

<https://doi.org/10.1631/FITEE.2400486>

CLC number: TP

1 Introduction

With the development of robotics (Hokayem and Spong, 2006; Liu et al., 2017; Chen et al., 2023), remotely operated vehicles (ROVs) have attracted increasing attention, whereby work-class ROVs can

effectively replace human operators during the execution of remote and complex underwater tasks from a safe place onboard (Wang et al., 2020; Lu et al., 2022; Forbrigger and Pan, 2018). Therefore, work-class ROVs are widely used in offshore and deep-sea operations, such as sampling and pipeline docking. The full operation process of a work-class ROV starts with navigation to the designated position (Long et al., 2022), and once the ROV reaches the designated operation area, it transitions from the navigation mode to the operation mode. At this stage,

[†] Corresponding author

* Project supported by National Natural Science Foundation of China (Nos. 52075476 and 52301404), Zhejiang Provincial Natural Science Foundation of China (No. LR23E050001)

ORCID: Fanghao HUANG, <http://orcid.org/0000-0003-3710-114X>; Zheng CHEN, <http://orcid.org/0000-0003-0961-8758>

© Zhejiang University Press 2024

the human operator takes over and teleoperates the manipulator installed on the ROV to perform precise tasks (Zhang et al., 2018). In order to adapt to various operational environments and to improve the safety and precision of underwater tasks, tailored ROV navigation, motion control algorithms, and teleoperation control algorithms need to be developed for work-class ROVs. However, there still remain challenges in algorithm development for the work-class ROV, mainly due to the difficulties encountered during underwater testing, high equipment cost, and the time-consuming nature of the process. To address these issues, the development of a digital simulation platform becomes a feasible solution to enable algorithm pretesting and operator training for the full operation process before undertaking the actual tasks (Li et al., 2022).

Due to the complex terrain and the limited light in underwater environments, autonomous navigation-and-motion control of ROVs can effectively assist human operators in controlling the ROV to reach the desired positions (Manzanilla et al., 2019; Zhao et al., 2014; Tani et al., 2023; Kinsey et al., 2014). The typical method to test the navigation-and-motion control algorithm is to apply offline simulators, which have high calculation efficiency (Huang et al., 2023). However, it is difficult to support interaction with real data or sensors of the ROV in these offline simulators, which may result in inaccuracies during the algorithm-testing process. As a result, algorithm testing for navigation with only the offline simulator is insufficient for direct application in a real ROV, which poses a challenge for the design of a digital simulation platform for the navigation-and-motion control of an ROV.

After the ROV reaches the desired position, the operation mode starts, and the human operator takes over to teleoperate the manipulator for precise underwater tasks. Teleoperation technology plays a significant role in enabling the manipulator to perform underwater tasks, and thus, it is commonly utilized in ROV digital simulation platforms for operator training and algorithm pretesting (Zhang et al., 2017a; Xia et al., 2023; Cárdenas and Dutra, 2016). During the underwater teleoperation process, telepresence is an important issue to evaluate whether and how well the human operator can receive the immersive feeling of a remote underwater environment, which helps guide the slave underwater manipula-

tor to accomplish the remote tasks immersively and effectively (Ferreira and Mavroidis, 2006; Yuan and Sun, 2023). The traditional way of implementing underwater tasks is with direct visual feedback in an ROV digital simulation platform, which offers the human operator with environment-related information on the slave side (Sivčev et al., 2018b; Khatib et al., 2016; Reichherzer et al., 2018). For example, a virtual underwater manipulator and its carrier have been previously developed and presented in the form of video animation (Zhang et al., 2017b). However, the single visual-based environment perception and rebuilding process is insufficient to meet the demands of fully and immersively rebuilding the underwater environment. The use of force information as a feedback is another effective solution to provide the intuitive and immersive feeling of the underwater environment for the human operator (Chen et al., 2020, 2024; Sun and Yuan, 2023), such as providing the interaction force between the slave manipulator and the underwater environment (Zhang et al., 2020). Therefore, comprehensive perception of the visual and force information of the underwater environment becomes an effective way to improve the telepresence in ROV digital simulation platforms.

Additionally, existing research lacks comprehensive designs of a digital simulation platform that simultaneously considers both the teleoperation control of the manipulator and the navigation-and-motion control of an ROV, thus failing to provide the full operation process of a work-class ROV. For instance, Zhang et al. (2017a) only consider the motion control of the manipulator during the underwater task, while Khadhraoui et al. (2016) solely focus on the navigation-and-motion control of the ROV.

Considering these challenges encountered in the development of a work-class ROV, a virtual reality (VR)-based digital simulation platform is proposed in this paper for the full operation process of work-class ROVs. By the comprehensive perception of visual and force information of the underwater environment, the proposed platform provides the human operator with quality-improved underwater virtual training using the recorded in-situ data (described as Mechanism 1), which avoids the expensive costs of real underwater tests and helps improve operator skills before real tasks. In this mechanism, an open data interface is provided for the ROV navigation-and-motion-control algorithm and the teleoperation

control algorithm, which offers the human operator a custom platform for algorithm testing, development, and verification. Moreover, it also provides the visual and force feedback with immersive feeling when implementing the actual underwater tasks (described as Mechanism 2), which is designed as an additional function of this platform. In this way, a novel solution is developed via this digital simulation platform, which can effectively reduce the training cost and enhance underwater operability with visual and force assistance.

The main contributions of this work are listed as follows:

- Two mechanisms are developed for work-class ROVs in the digital simulation platform, with one providing the virtual simulation with virtual scenes to achieve human operator training, while the other provides real-time visual and force feedback when implementing the actual tasks. In the meantime, an open data interface is designed for researchers, which enables algorithm pretesting before undertaking the actual underwater tasks.

- Based on the real video signal or the recorded in-situ data, a virtual scene with hydrodynamics effect is accurately created and the motion of the ROV can be simulated in the virtual scene, which provides the human operator with intuitive and immersive visualization of the underwater environment.

- The ROV navigation-and-motion-control unit is presented to drive the ROV to the working position. This unit is designed with open data interfaces in both the navigation and the control modules, allowing researchers to test and evaluate their own navigation-and-control algorithms for the motion of ROVs. The dynamic windows approach (DWA)-based local navigation algorithm and sliding mode control (SMC) controller are proposed to implement navigation-and-motion control during the full process of ROV operation.

- A teleoperation control framework is designed, wherein a modified wave-variable architecture is proposed to provide the human operator with accurate force feedback and simultaneously ensure the stability of the teleoperation system, while the radial basis function neural network (RBFNN)-based slave controller is proposed to improve the tracking performance of slave manipulator.

- A user study focused on the ROV operation mode is carried out, which evaluates and verifies that

the digital simulation platform can accurately simulate the underwater operation tasks with recorded in-situ data and can effectively train the human operator with immersive telepresence via visual and force feedback during the manipulation task.

The remainder of this paper is organized as follows. Section 2 introduces the overall framework of the digital simulation platform, and Section 3 presents the design of each unit of the digital simulation platform. Section 4 describes the underwater sediment sampling and pipeline docking tasks undertaken to implement the full operation process of an ROV, with an additional user study focused on the operation mode. Section 5 presents the conclusion.

2 Framework of the digital simulation platform

In this paper, typical underwater teleoperation scenarios of an ROV are selected, where the human operator can control the master manipulator (Phantom Omni haptic device) from a safe place, and send the required commands to the slave manipulator (manipulator installed on the ROV) to accomplish the remote tasks after navigating the ROV to the desired position. In order to obtain the telepresence during the teleoperation process, a human-interactive digital simulation platform is developed in this section, as seen in Fig.1. It can provide the human operator with an immersive feeling of the remote environment during the full operation process and guide the slave manipulator to better accomplish the tasks with visual and force feedback assistance. This digital simulation platform mainly consists of the virtual scene unit, ROV navigation-and-motion-control unit, teleoperated manipulation unit, environment perception-and-rebuild unit, and in-situ data-monitoring unit.

However, considering the extreme difficulty, harsh conditions, and expensive equipment costs of underwater tests, it is usually challenging to frequently implement the teleoperation tasks of ROV in the real underwater environment. Thus, the proposed digital simulation platform has the following two mechanisms:

- **Mechanism 1** : This involves virtual training of the full operation process of work-class ROVs with the recorded in-situ data. This mechanism allows the human operator to test and improve his/her

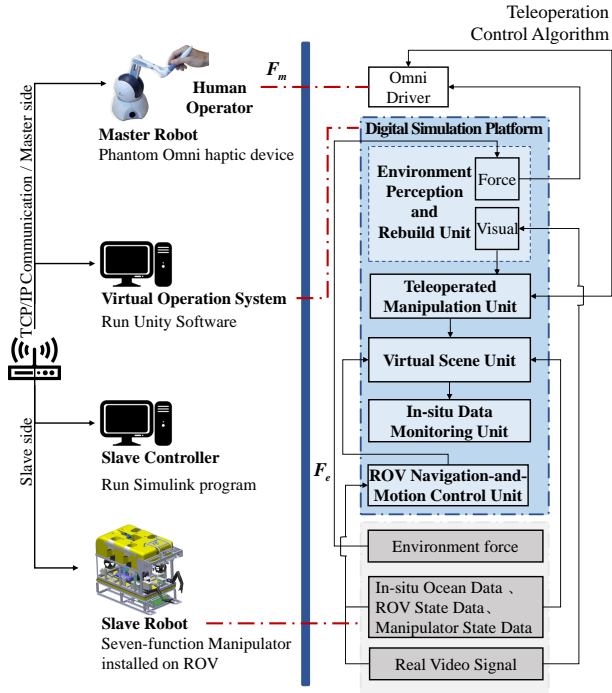


Fig. 1 The framework of the digital simulation platform, where red dashed lines indicate a correspondence relationship, while black arrow lines represent the signal flow between different modules. ROV, remotely operated vehicle.

algorithms by simulating the full operation process and hone his/her skills before the real underwater test. Moreover, this mechanism also allows the digital simulation platform to restore the actual operation process of the ROV using the recorded in-situ data, which can be used to find any problems and gain experience before the next actual underwater test.

- **Mechanism 2** : This facilitates the real-time visualization and operation of a work-class ROV and its installed manipulator with an immersive feeling. This mechanism provides the human operator with the visualized ROV data during the navigation process along with the visual and force feedback with in-situ data during the real underwater teleoperation process, which guarantees human-interactive and immersive guidance for the slave manipulator to accomplish the tasks after the ROV navigation process.

In detail, based on the target position obtained from the real video signal and the current ROV state data, the ROV navigation-and-motion control unit can simulate the motion of the ROV to the target position. After arriving at the target position, the ROV

can adjust its posture and start the operation using its installed manipulators. In the operation mode, based on the proposed teleoperation control framework in the teleoperated manipulation unit, the human operator is able to execute the task through the manipulator installed on the ROV under time delays. The environmental force is transmitted in the form of a wave variable to guarantee the stability of the teleoperation system, which helps the human operator sense the real environmental force. Subsequently, the visual perception-and-rebuild unit can transmit the target position and joint angles of the manipulator to the slave side, and these are displayed on the screen, which enables the human operator to observe and simulate the tasks of the ROV in various perspectives. Additionally, the in-situ data-monitoring unit can monitor and display the in-situ ocean data (e.g., temperature, salinity, depth, etc.), the ROV state data, and the manipulator state data, which are obtained from the slave side or the virtual scene.

Thus, based on the units in Fig. 1, the virtual scene and the in-situ ocean data are displayed on the screen to visualize the full operation process of the ROV, while the force feedback is provided by the master manipulator, which improves the human operator's telepresence with both the visual and force feedback.

Remark 1 The traditional underwater operation (Lin and Kuo, 2001) usually uses a joy stick to control the slave robot only in the virtual environment without any remote information feedback to the human operator, which mainly results in poor telepresence. Therefore, accurately rebuilding the physical working environment on the master side becomes quite difficult because the human operator is usually far away from the working environment. Thus, the virtual environment in most of the existing virtual training systems cannot be accurately modeled since the actual environment information is not accurately obtained, while the same joy stick used in the training cannot provide the telepresence for the human operator. Different from previous works on virtual training, a novel visual-and-force-assisted virtual operation system is developed in this paper, where the force feedback and the VR-based visual feedback are added; two mechanisms are designed, with one providing the simulation training with recorded in-situ data, while another provides the real-time visual and force feedback when implementing the actual tasks.

Based on the data interface designed in this system, the in-situ data can be recorded in real time and used to accurately create the in-situ-data-driven virtual environment as much as possible, which has multiple perspectives and the data-monitoring advantage, as shown in Fig.1; furthermore, the physical interaction - including the hydrodynamics and dynamics of the ROV - can be simulated based on the force feedback, which provides a relatively immersive feeling for the human operator when implementing the virtual training. Moreover, this data interface allows the system to test and improve the teleoperation algorithms during training, while finally implementing them in the actual tasks. Based on the preceding analysis, the virtual operation system developed in this paper can accurately build the in-situ-data-driven virtual environment with visual and force feedback, wherein more immersive training can be provided to help the human operator gain the human-robot collaboration experience. ■

3 Design of each unit of the digital simulation platform

3.1 Design of virtual scene unit

Based on the real video signal obtained by the ROV, the virtual scene is rebuilt in the digital simulation platform, which actually creates the real underwater environment of the ROV. The virtual scene unit mainly includes the ROV 3D modeling and the underwater scenario modeling parts; the ROV 3D modeling part includes the proportional ROV 3D model established using the SolidWorks software, and the underwater scenario modeling part includes the underwater terrain, the underwater environment, collision detection, and data mapping.

3.1.1 ROV 3D modeling

Due to the limitations of the modeling capabilities of the Unity software, a proportional ROV 3D model is built using the SolidWorks software based on the real ROV structure, as shown in Fig.2. This model is equipped with two seven-function manipulators to simulate the ROV's real underwater operation tasks (Zhang et al., 2017b). Supposing that the positive direction of the X -axis for the ROV model is the positive direction of motion, the ROV model is dragged and dropped in the Unity software screen

to guarantee that the heading direction of ROV is always the positive direction of the X -axis.

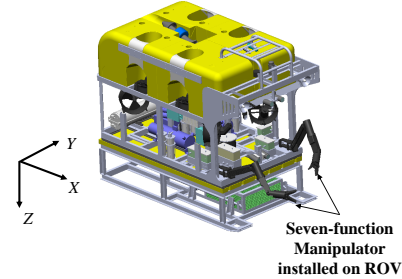


Fig. 2 The 3D model of the ROV. ROV, remotely operated vehicle.

3.1.2 Underwater Scenario modeling

Based on the real video signal, the real underwater scenario is selected and rebuilt in the digital simulation platform. As shown in Fig. 3, the underwater terrain rebuilt in the virtual scene is quite similar to the original one.

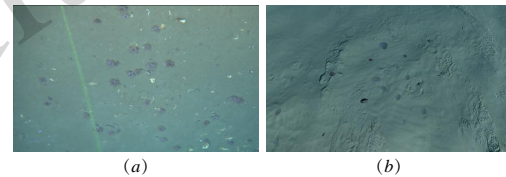


Fig. 3 Underwater terrain in (a) the real video and (b) the virtual scene.

The procedure to rebuild the underwater scenario in the virtual scene is as follows:

- Underwater terrain: The point cloud of the underwater terrain is first obtained by the RGB-D camera mounted on the ROV. Since the information obtained by the RGB-D camera requires larger storage space to restore the unprocessed point cloud data and consumes larger computation resources to complete the filtering operation during error correction, it may be not suitable for the real-time modeling of the underwater terrain. Since the digital elevation model (DEM) file integrates all the underwater terrain data with only one filtering operation, the point cloud information combined with the DEM is much easier to be restored. Based on this idea, the DEM file is grayed, and the grayscale value is obtained as follows:

$$F = rR_r + gG_r + bB_r, \quad (1)$$

where F is the grayscale value representing the average depth of the area in the underwater terrain; R_r , G_r , and B_r represent the matrix of the RGB components, respectively; and the grayscale coefficients are selected as $r = g = b = 1/3$.

To meet the requirement of the Unity software application, a 16-bit gray map file is generated by the grayscale value obtained earlier, wherein the horizontal axis corresponds to the longitude, the vertical axis corresponds to the latitude, and the gray value represents the terrain height. Subsequently, in the Unity software, a mesh plane with medium polygon density is created while the grayscale map file is converted to the RAW file and imported, and the height of each vertex along the Z -axis is changed with regard to the corresponding gray value in the mesh plane. Finally, based on the location of the ROV, the preset texture materials (e.g., rock, sealant, seashell, and other underwater creatures) are given to the mesh plane, thus completing the underwater terrain creation in the virtual scene, as shown in Fig. 3b;

- Underwater environment: For the visual effect, the seawater color and atomization effect are considered. First, a material file with the gradient effect is added to the virtual scene, which can achieve a gradient effect of seawater color from shallow to deep; secondly, the atomization effect, which has the effect of being shrouded in a cloud of smoke, is added to the virtual scene to simulate the real underwater environment. The atomization effect includes the atomization color and atomization parameter f , the RGB values of the atomization color are selected as $R = 2$, $G = 49$, and $B = 58$, and the atomization parameter f is designed as follows:

$$f = e^{-(d \cdot den)^2}, \quad (2)$$

where d is the distance between the target and the location of the ROV, den is the density parameter with the range of $[0, 1]$, and the value of den in this virtual scene is set as $den = 0.005$. Finally, using the atomization effect, the mixing of the virtual scene color and the atomization color is achieved, which means that the smaller the distance d , the larger is the atomization parameter f and the clearer the virtual scene, while the larger the d , the smaller is the f and the fuzzier the virtual scene; the detailed atomization effect is shown in Fig. 3b;

The hydrodynamics effect (Sun et al., 2022) is also considered while simulating the underwater en-

vironment in the physical aspect. The underwater flow is generated by the linear superimposition of each vortex in the X and Y directions. Assume that the underwater flow has the same velocity at different depths, since the 3D underwater flow can be simplified to 2D with multilayer superimposition and the underwater flow models present similar flow fields at different depths. Subsequently, the flow speed can be described as follows:

$$\begin{cases} c_x(\mathbf{h}) = \sum_{i=1}^n -\frac{\Gamma_i(h_y - y_i)}{2\pi r_i(\mathbf{h})} (1 - \exp(\frac{-r_i(\mathbf{h})}{\delta_i^2})), \\ c_y(\mathbf{h}) = \sum_{i=1}^n \frac{\Gamma_i(h_x - x_i)}{2\pi r_i(\mathbf{h})} (1 - \exp(\frac{-r_i(\mathbf{h})}{\delta_i^2})), \end{cases} \quad (3)$$

where $c_x(\mathbf{h})$ and $c_y(\mathbf{h})$ represent the flow speed at $\mathbf{h} = [h_x, h_y]$. Here, $[x_i, y_i]$, $\Gamma_i \in (6, 15)$, and $\delta_i \in (1, 3)$ represent the center position, intensity, and the radius of the i -th vortex, respectively. The term $r_i(\mathbf{h})$ denotes the distance between \mathbf{h} and the i -th vortex's center position $[x_i, y_i]$, i.e., $r_i(\mathbf{h}) = \|\mathbf{h} - [x_i, y_i]\|$; $n = 50$ represents the number of vortices. To better simulate the underwater flow in this virtual scene, the speeds $c_x(\mathbf{h})$ and $c_y(\mathbf{h})$ are linearly superimposed with a limitation from 0 m/s to 0.25 m/s, which directly act on the ROV dynamics modeled in Section 3.2.

- Collision detection: To achieve the underwater operation tasks, the mesh-based collision body is attached to the ROV and the underwater terrain, which allows the virtual scene to have the ability to detect collision and rigid body contact.

- Data mapping: The in-situ data (e.g., temperature, salinity, depth, etc.) and the underwater terrain are matched, whereby the data relationship among the temperature, salinity, and the depth of the ROV is mapped, which can simulate the in-situ data at the location of the ROV in the virtual scene.

3.2 Design of the ROV navigation-and-motion control unit

The ROV navigation-and-motion control process primarily consists of the mathematical modeling of the ROV, the navigation process, and the motion control process. This unit simulates the motion of the ROV to the target position, which is achieved through the following steps. First, based on the target position obtained from the real video signal, along with the current ROV state data ob-

tained from the in-situ-data-monitoring unit, the navigation module generates real-time desired velocity commands that can drive the ROV to the specified position. Then, the motion control module generates control inputs based on the desired velocity commands. Finally, based on the control inputs of the ROV, the motion module simulates the real-time trajectory of movement of the ROV, which ultimately reaches the target position. After arriving at the target position, the ROV can adjust its posture and start the operation using its installed manipulators.

3.2.1 Modeling of the ROV

The motion module includes the mathematical model of the ROV in Fig. 2, which uses five hydraulic-motor-driven ducted propellers: one is arranged vertically above the ROV, and the others are arranged in the horizontal plane at certain angles, which achieves the motion of the ROV in the longitudinal, lateral, vertical, and heading directions.

Since in the teleoperation process, the main concern is the installed manipulators of the ROV, the ROV's six-degree-of-freedom mathematical model is simplified to a four-degree-of-freedom model (Zhang et al., 2022), which includes the translation in X -, Y -, Z -axes and rotation along the Z -axis. The simplified four-degree-of-freedom mathematical model of ROV can be written as follows:

$$\dot{X}_R = R(X_R)V_R, \quad (4)$$

$$\dot{V}_R = A_t V_R + C_t^{-1} T_t + D_t, \quad (5)$$

where $X_R = [x_R, y_R, z_R, \phi_R]^T$, and x_R, y_R , and z_R denote the position of the ROV and ϕ_R denotes the yaw angle. $V_R = [u, v, w, r]^T$, where u, v , and w are the velocities of the ROV along the X -, Y -, and Z -axes, respectively; r is the angular velocity of the ROV along the Z -axis. $D_t = [d_u, d_v, d_w, d_r]^T$ represents the external disturbances. $R(X_R)$ is the rotation matrix and can be defined as follows:

$$R(X_R) = \begin{bmatrix} \cos(\phi_R) & -\sin(\phi_R) & 0 & 0 \\ \sin(\phi_R) & \cos(\phi_R) & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix}.$$

Furthermore, $A_t = C_t^{-1} P_t$, where C_t and P_t are

defined as follows:

$$C_t = \begin{bmatrix} m - X_{\dot{u}} & 0 & 0 & 0 \\ 0 & m - Y_{\dot{v}} & 0 & 0 \\ 0 & 0 & m - Z_{\dot{w}} & 0 \\ 0 & 0 & 0 & I_z - N_{\dot{r}} \end{bmatrix}, \quad (6)$$

$$P_t = \begin{bmatrix} X_{u|u}|u| & 0 & 0 & X_{vr}v \\ 0 & Y_1 & 0 & Y_r u - m \\ 0 & 0 & Z_1 & 0 \\ 0 & N_v u & 0 & N_1 \end{bmatrix}, \quad (7)$$

where $Y_1 = Y_{v|v}|v| + Y_v u$, $Z_1 = Z_{w|w}|w| + Z_w u$, $N_1 = N_r u + N_{r|r}|r|$, and m is the mass of the ROV; I_z is the moment of inertia of the ROV along the Z -axis; $X_{\dot{u}}, X_{u|u}, X_{vr}, Y_{\dot{v}}, Y_{v|v}, Y_r, Z_{\dot{w}}, Z_{w|w}, Z_w, N_{\dot{r}}, N_{r|r}, N_r$, and N_v are the hydrodynamic coefficients; $T_t = [X_t, Y_t, Z_t, N_t]^T$ is the thrust force, which is regarded as the control input.

3.2.2 Design of the navigation module

The navigation module is designed to generate the desired velocity command for the ROV to guide it toward the specified position. This module provides an open data interface for researchers since any navigation algorithm under development can be programmed for verification and improvement. Here, a DWA-based local navigation method is applied, for example, to guide the ROV to reach the target position.

Considering the four-degree-of-freedom model represented by Eq. (4) of the ROV, the navigation process is decomposed into a horizontal navigation process and a vertical navigation process. In the horizontal navigation process, the DWA-based navigation algorithm is used to guide the ROV's movement to the plane coordinates of the target position. Once the ROV reaches the desired horizontal position, it transitions to the vertical navigation process, whereby it ascends or descends vertically at a constant velocity to reach the target position.

The DWA-based navigation process is shown in Algorithm 1, whereby the input is the target position P_{goal} , and the output is the desired instructions $U_{desired} = [u_d, r_d]^T$; this is transmitted to the motion control module in the closed loop. $[x_c, y_c, \phi_c, u_c, r_c]^T$ are the current states of the ROV in the coordinate plane, u_{Max} and u_{Min} are the maxima and the minima of the surge velocity u , while r_{Max} and r_{Min}

are the maxima and the minima of the yaw angular velocity r ; $a_{u,Max}$ and $a_{r,Max}$ are the maxima of the surge acceleration and yaw angular acceleration, respectively. T is the predictive time of the DWA algorithm.

As shown in *Algorithm1*, the detailed navigation process can be described as follows. First, in the horizontal navigation stage, the plane coordinates of the target position are defined as the desired position P_{goal} . Then, a dynamic window is constructed, which represents a set of feasible velocity commands (including linear velocity u_t and angular velocity r_t), bounded by the physical constraints of the ROV and discretized with resolution δ_u and δ_r . Next, each set of velocity commands within the dynamic window is evaluated, and the set with the highest evaluation metric is selected as the current generated velocity command. The evaluation metrics in the aforementioned steps are defined as follows:

$$H_e(u, r) = aW_{ori} + bW_{dist} + cW_{vel}, \quad (8)$$

where a , b and c are positive constants; W_{ori} , W_{dist} and W_{vel} are the sub-objective functions that can be defined as follows:

$$W_{ori} = 180 - (\phi_{pred} - \frac{180}{\pi}) \angle (P_{goal} - p_{pred}), \quad (9a)$$

$$W_{dist} = \text{Min}(D_{obs}, D_{safe}), \quad (9b)$$

$$W_{vel} = \|u_t\|, \quad (9c)$$

where $p_{pred} = [x_{pred}, y_{pred}]^T$ and ϕ_{pred} are the location and the yaw angle predicted by the velocity command (u_t, r_t) with respect to Eq. (4). D_{obs} is the distance between the ROV and the nearest obstacle obtained by the other units and D_{safe} is the safe distance; $\text{Min}(\cdot)$ denotes the minimal value function.

Finally, when the ROV reaches the plane coordinates of the target position, it enters the vertical navigation process, whereby it ascends or descends vertically at a constant velocity v until it reaches the target position.

Remark 2 In Algorithm 1, all the feasible velocity commands in the dynamic windows are evaluated by the evaluation metric provided in Eq. (8) as follows. First, for each velocity command (u_t, r_t) , we calculate the predicted position P_t and the heading angle ϕ_t in the predictive time T with respect to Eq. (4). Secondly, the evaluation metrics are calculated based on P_t and ϕ_t with respect to Eq. (9).

Algorithm 1: DWA-based Navigation Algorithm

```

1 Input:  $P_{goal}, X_R$ ; Output:  $U_{desired}$ ;
2 while  $X_R \neq P_{goal}$ , do
3    $\underline{u} = \text{Min}\{u_{Max}, u_c + a_{u,Max} * T\}$ ;
4    $\bar{u} = \text{Max}\{0, u_c - a_{u,Max} * T\}$ ;
5    $\underline{r} = \text{Min}\{r_{Max}, r_c + a_{r,Max} * T\}$ ;
6    $\bar{r} = \text{Max}\{r_{Min}, r_c - a_{r,Max} * T\}$ ;
7    $i \leftarrow 0$ ;  $j \leftarrow 0$ ;
8   for  $u_t = \underline{u} : \delta_u : \bar{u}$ , do
9     for  $r_t = \underline{r} : \delta_r : \bar{r}$ , do
10       $[P_t, \phi_t] \leftarrow \text{Traj\_Gen}(\eta_c, u_t, r_t)$ ;
11       $H_{eva}(i, j) \leftarrow$ 
12         $\text{Eval}(P_t, \phi_t, P_{goal}, P_{obs}, u_t)$ ;
13         $\text{Vel\_Cmd}(1 : 2, i, j) \leftarrow (u_t, r_t)$ ;
14       $j \leftarrow j + 1$ ;
15     $i \leftarrow i + 1$ ;
16  $U_{desired} \leftarrow \text{Vel\_Cmd}(:$ 
17    $, \text{Find\_Max\_Metric}(H_{eva}))$ ;

```

That is, W_{ori} is used to evaluate the approach of the ROV's predicted yaw angle towards the target orientation; if the predicted heading angle ϕ_t is closer to the target orientation, the greater is the weight of this item. W_{dist} is used to evaluate the risk of collision; if the ROV is farther away from the obstacle, the greater is the weight of this item. Note that W_{dist} is constrained by a boundary to prevent it from occupying an excessively large proportion of the total weight when there is no collision. The final item W_{vel} is used to evaluate the efficiency of motion, that is, the whole motion is expected to be achieved in the shortest time. Therefore, by selecting the velocity command with the greatest weight as the output $U_{desired}$, the local trajectory guided by it can reach P_{goal} with obstacle avoidance and high efficiency. ■

3.2.3 Design of the ROV motion control module

The ROV motion control module is designed to calculate the control inputs T_t , which can drive the ROV to track the desired velocity commands u_d , w_d , and r_d . Note that this module also provides an open data interface for researchers to verify and improve the user-defined control algorithms. Here, an SMC algorithm is applied, for example, to illustrate how the motion control module works.

We define the desired velocity commands as $V_D = [u_d, 0, w_d, r_d]^T$, where the desired sway velocity v_d is set as zero. The control objective is to drive the motion of the ROV to achieve the desired velocity commands V_D obtained in the navigation module. The SMC-based controller can be designed as follows.

First, we define the sliding surface as follows:

$$S = \Lambda \tilde{V}_R + \int \tilde{V}_R dt, \quad (10)$$

where $\tilde{V}_R = V_D - V_R$, and Λ is the positive constant matrix.

Then, taking the derivative of Eq. (10) and substituting it in Eq. (4), one can obtain the following:

$$\dot{S} = \Lambda \dot{\tilde{V}}_R + \tilde{V}_R = \Lambda(A_t V_R + C_t^{-1} T_t + D_t - \dot{V}_D) + \tilde{V}_R. \quad (11)$$

Thus, T_t can be designed as follows:

$$T_t = -C_t K S - C_t \Gamma \text{sign}(S) + C_t (\dot{V}_D - A_t V_R - \Lambda^{-1} \tilde{V}_R), \quad (12)$$

where $K = \text{diag}(k_1, k_2, k_3, k_4)$, $\Gamma = \text{diag}(\eta_1, \eta_2, \eta_3, \eta_4)$, $k_i > 0$ and $\eta_i > d_{max}$ for $i = 1, 2, 3, 4$, where $d_{max} = \max\{|d_u|, |d_v|, |d_w|, |d_r|\}$.

Theorem 1 Considering the dynamics of the ROV in Eq. (4) with the bounded disturbance D_t and the SMC-based controller, shown in Eq. (12), with $k_i > 0$ and $\eta_i > d_{max}$ for $i = 1, 2, 3, 4$, all signals of Eq. (11) can be guaranteed to be bounded and the system in Eq. (11) is stable, which implies that the velocity error $\tilde{V}_R \rightarrow 0$ as $t \rightarrow \infty$; the control objective can be achieved.

3.3 Design of teleoperated manipulation unit

After navigation to the target position, manipulation of the ROV is usually achieved by human-interactive teleoperation of the slave manipulator installed on the ROV. To be specific, the operation mode starts, with the teleoperated manipulation unit receiving the commands given by the human operator and driving the manipulator to execute the tasks. The teleoperated manipulation unit mainly consists of the teleoperation system modeling and the teleoperation control framework (see Section 1 of Supplementary materials).

3.4 Design of the environment perception-and-rebuild unit

The environment perception-and-rebuild unit is mainly used to provide the human operator with the force and visual feedback of underwater operation tasks on the slave side.

The visual-based perception-and-rebuild unit can transmit the target position and joint angles of the slave manipulator to the teleoperated manipulation unit. Then, using the Omni driver, the asymmetric mapping algorithm, and the teleoperation control algorithm in the teleoperated manipulation unit, the ROV's real working environment can be accurately created in the virtual scene.

To better show the ROV's condition during the underwater operation tasks, various perspectives (e.g., the first- and the third-person perspectives) are designed in the visual-perception-and-rebuild unit, as shown in Fig. 4. In detail, the camera plug-in in the Unity software is used to select the specific view of underwater operation tasks, where the view image is rendered and loaded by the RAW file; the procedure is the same with the underwater terrain discussed in Section 3.1.2. Thus, the viewed image can be displayed on the screen.

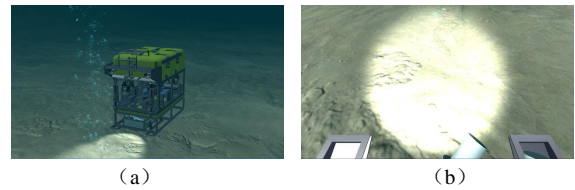


Fig. 4 The multiple perspectives of a virtual scene: (a) third-person perspective; (b) first-person perspective.

Remark 3 Based on the environment perception-and-rebuild unit, the human operator can sense the interaction force between the slave manipulator and the working environment, which is achieved by the environmental force feedback on the master manipulator. Moreover, the human operator can immersively observe the underwater operation tasks on the screen, which helps improve the telepresence and effectively guide the human operator, thereby achieving the demonstration for the teleoperation application. ■

3.5 Design of the in-situ data-monitoring unit

The in-situ data-monitoring unit mainly includes the monitoring interface of in-situ data (e.g., temperature, salinity, depth, etc.), the ROV state data, and the manipulator state data. By the Linechart plug-in in the Unity software, the corresponding curves of in-situ data can be dynamically drawn in real time.

In detail, the in-situ data and the ROV state data-monitoring interface displays the data from the relationship among the temperature, salinity, and the depth of the ROV, that is, when the ROV moves in the virtual scene, the monitoring interface can display the in-situ data and the ROV state data at the current location of the ROV in real time.

For example, Fig. 5a depicts the motion of an ROV near a hydrothermal vent. When the ROV moves closer to the hydrothermal vent, the depth where it is located continues to increase, and the temperature continues to rise, which can also be obtained from the in-situ data monitoring in Fig. 5b. Thus, this example verifies that the monitoring interface can accurately simulate the in-situ data of the working environment in which the ROV is located.

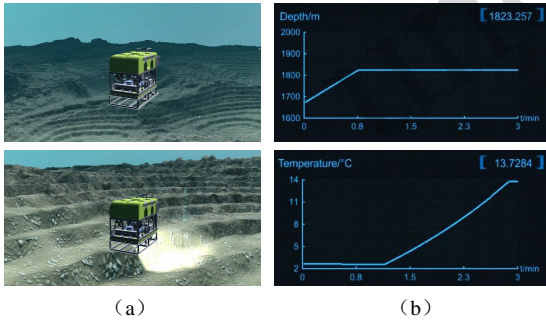


Fig. 5 ROV motion near a hydrothermal vent; (a) ROV motion simulation; (b) in-situ data monitoring. ROV, remotely operated vehicle.

Similarly, the manipulator state data-monitoring interface can display the joint angles of the slave manipulator in real time, which provides the human operator with real-time information about the states of the slave manipulator when executing underwater operation tasks.

Remark 4 Along with the ROV navigation-and-motion control unit and the teleoperated manipulation unit, the proposed digital simulation platform is equipped with a DWA-based local navigation al-

gorithm and an SMC controller for the navigation-and-motion control of the ROV; it is also equipped with the modified wave-variable architecture and an RBFNN-based slave manipulator controller for stability of the teleoperation system and precise position tracking during the ROV operation mode. Notably, these applied algorithms are served as examples in the platform. Moreover, researchers can also design their own algorithms in these units with the designed data interface, which helps to test and improve the algorithms in the virtual training mechanism and finally implement these algorithms in the real underwater test. ■

4 Experiment on full operation process of a work-class ROV: user study

In this section, two specific underwater operation tasks, including underwater sediment sampling and pipeline docking, are selected. Due to the huge difficulty, harsh and limited conditions, and expensive equipment costs of real underwater tests, the current conditions in our laboratories cannot frequently support the teleoperation tasks of ROVs in the real underwater environment. Instead, to obtain accurate virtual training as much as possible, we use recorded in-situ data and the real video signal obtained from previous real underwater tests to accurately create, as much as possible, the two specific underwater tasks, namely, sediment sampling and pipeline docking (described as Mechanism 1). Moreover, considering that the operation mode with teleoperated manipulation has a greater impact on the human operator, a user study with several metrics is designed to evaluate the accuracy of the proposed digital simulation platform and the effectiveness of training the human operator before the real underwater test.

4.1 Experiment setup

The experiment platform is shown in Fig. 6, where the human operator operates the master manipulator and commands the slave manipulator to accomplish the underwater operation tasks. In the meantime, the master manipulator provides the human operator with the force information via the Omni driver, and the screen shows the visual information of the underwater environment, which includes the virtual scene and the in-situ data. In

particular, Fig. 7 shows an underwater scenario in the digital simulation platform, which is generated based on the underwater in-situ data of a certain area in Hainan Province, China. In Fig. 7, the orange point is the initial position of the ROV, and the red points are the sediment sampling point and the pipeline docking point.

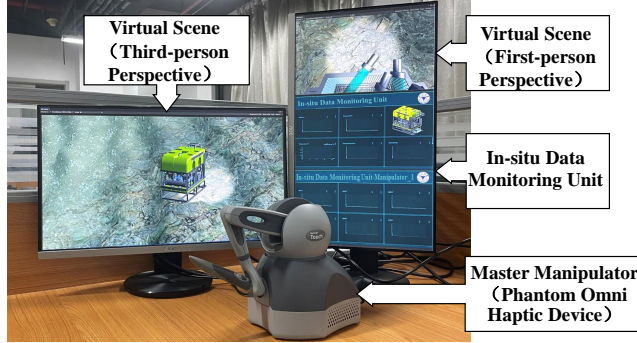


Fig. 6 The experiment platform.

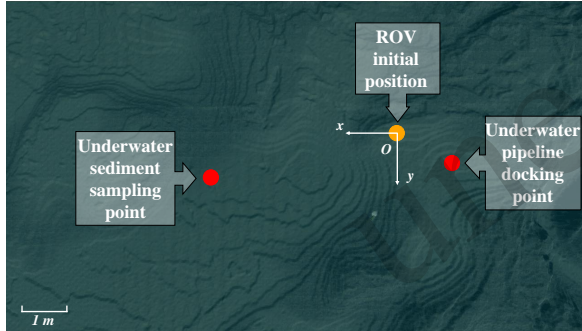


Fig. 7 The positions of the ROV in the virtual scene during the operation of the two tasks. ROV, remotely operated vehicle.

In the ROV navigation and motion control unit, the parameters in the DWA-based local navigation algorithm are set as $a = 0.1$, $b = 5$, and $c = 1$, and the predictive time $T = 0.2$ s. The constant velocity of the ROV during the vertical navigation process is set as 1 m/s. The parameters in the SMC controller are set as $\Lambda = \text{diag}\{0.1, 0.1, 0.1, 1\}$, $K = \text{diag}\{2.5, 2.5, 2.5, 2\}$, and $\Gamma = \text{diag}\{0.1, 0.1, 0.1, 1\}$. In the teleoperated manipulation unit, the parameters of wave-variable architecture are selected as $b = 10$, $\lambda = 0.5$, and $\tau = 0.05$. The desired matrixes in the master trajectory generator are set as $M_{md} = \text{diag}\{4, 4, 2.5\}$, $G_{md} = \text{diag}\{0, 0, 0\}$, $G_{md} = \text{diag}\{0, 0, 20\}$, and $v_m = \text{diag}\{1, 1, 1\}$. As

for selection of the RBFNN-based slave controller, $\sigma_s = \text{diag}\{5, 5, 5\}$, $\kappa_s = \text{diag}\{1.5, 1.5, 1.5\}$, $\zeta = 0.01$, and $\Gamma_s = \text{diag}\{2.5, 2.5, 2.5\}$.

Moreover, to evaluate whether the human operator can efficiently complete the tasks in the digital simulation platform during the operation mode, six volunteers (aged 20-25 years, comprising three men and three women, with normal or corrected vision, no physical disability, and no virtual environment training experience earlier) are selected to carry out the user study. In the user study, five conditions have been designed to verify the effectiveness of each unit in the digital simulation platform to improve the telepresence, listed as follows:

- C1: SP, without EFF, without AMA;
- C2: VP, without EFF, with AMA;
- C3: SP, with EFF, with AMA;
- C4: VP, with EFF, without AMA;
- C5: VP, with EFF, with AMA.

Here, SP represents the single perspective, VP denotes the various perspectives defined in Section 3.4, EFF denotes the environmental force feedback defined in Section 3.4, and AMA is the asymmetric mapping algorithm defined in Section 3.3.

Additionally, three metrics are designed to evaluate how good is the virtual training of underwater operation tasks, listed as:

- The success ratio $p_r = \frac{N}{M}$; N is the number of successful times; and M is the total number of times, which is fixed as $M = 15$. In detail, the successful operation of the underwater sediment sampling task means that the mud picker is filled with the sediment and taken back to the collection box, while the successful operation of the underwater pipeline docking task means that the pipeline is docked via the two manipulators.

- The completion time $p_t = \int_0^T dt$, which is the period to successfully complete a task once during the operation mode (e.g., the sediment sampling or pipeline docking), from the beginning to the successful operation of the task, excluding the rest time.

- The work load $p_o = \frac{1}{n} \sum_{i=1}^n I_i$, which is obtained by the NASA-TLX (Hart and Staveland, 1988) with $n = 6$, where I_i contains the mental demand (I_1), the physical demand (I_2), the temporal demand (I_3), the performance (I_4), the effort (I_5) and the frustration (I_6).

After providing the definitions of the conditions

and the metrics, two setups of user studies are listed as follows:

SET 1: We select one volunteer randomly to implement the training process 0, 2, 4, 6 and 8 times under condition C5. After the training, this volunteer is required to implement the tasks one more time, with the completion time p_t measured;

SET 2: We select five other volunteers who have experienced training 20 times under conditions C1-C5. After the training, each of them is required to implement the tasks another 15 times, with the average scores of the three metrics recorded.

4.2 Case 1: underwater sediment sampling

The underwater sediment sampling experiment is designed to verify the effectiveness of the digital simulation platform in the teleoperation of a single slave manipulator. For good presentation of the experiment, the condition SET 2-C5 is selected to show the experiment result.

The whole sampling process is shown in Fig. 8. First, assisted by the ROV navigation-and-motion control unit and the environment perception-and-rebuild unit, the ROV moves from the initial position to the underwater sediment sampling point, as shown in Fig. 8a. Secondly, as shown in Fig. 8b, when the ROV arrives at the sampling point, its posture is adjusted, and the collection box (equipped with the mud pickers) is stuck out; then, the slave manipulator enters the operation mode and is ready to start sampling. Subsequently, using the teleoperated manipulation unit, the master manipulator is directed to send the position signals of its end effector to the slave manipulator in the digital simulation platform via the TCP/IP communication mode. Finally, the slave manipulator is commanded to accomplish the tasks, which include the reaching of mud pickers' initial position to grasp the mud picker, the reaching of the sampling point to do the sediment sampling, and the retraction of the mud picker and return to the initial position.

Remark 5 Fig. 8 includes the screenshots of the real video signal during the sediment sampling task. It can be concluded that the in-situ data-driven digital simulation platform can accurately simulate the actual tasks, which can be used for the virtual training of a human operator before the real underwater test. Especially, the real video signal only provides a small range and single perspective with dark view,

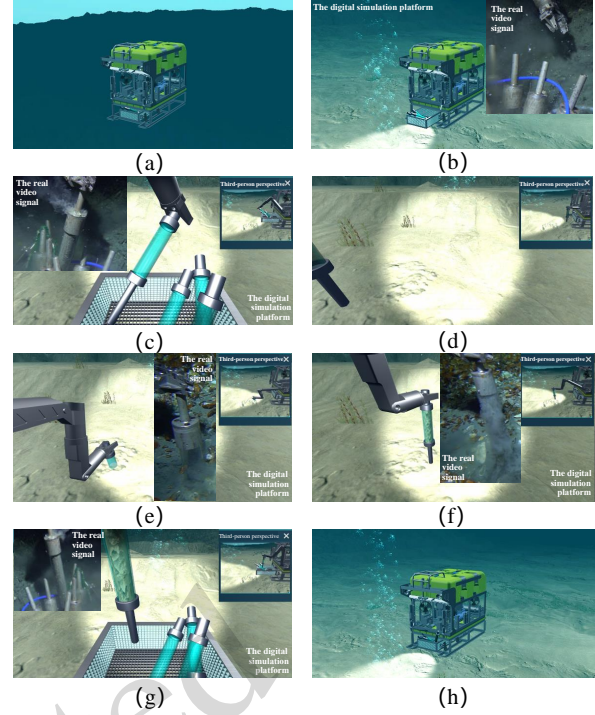


Fig. 8 The underwater sediment sampling process of ROV in the virtual scene: (a) ROV navigation and motion process; (b) ROV posture adjustment; (c) mud picker grasp; (d) ready to sample; (e) sediment sampling; (f) end of sampling; (g) retraction of the mud picker; (h) manipulator returns to the initial position. ROV, remotely operated vehicle.

and the sediment occasionally blocks the camera's view. Thus, the proposed platform provides a large range and various perspectives with bright view, in addition to removing the turbidity caused by the sediment, which ensure the visibility of the operation and further improve the telepresence for the human operator. ■

Figs. 8a and 8b show the navigation mode, wherein the ROV moves from its initial position to the underwater sediment sampling point using the DWA-based local navigation algorithm and the SMC controller. Subsequently, during the operation mode, in the sampling preparation period (Fig. 8c-8e), the slave manipulator grasps the mud picker and inserts it into the sampling point under the teleoperation control framework; Figs. 8f-8h show the sampling operation period, during which the slave manipulator finishes the sampling, retracts the mud picker to the collection box, and returns to the initial position.

As shown in Fig. 9a, with the real-time planning of the DWA-based local navigation algorithm

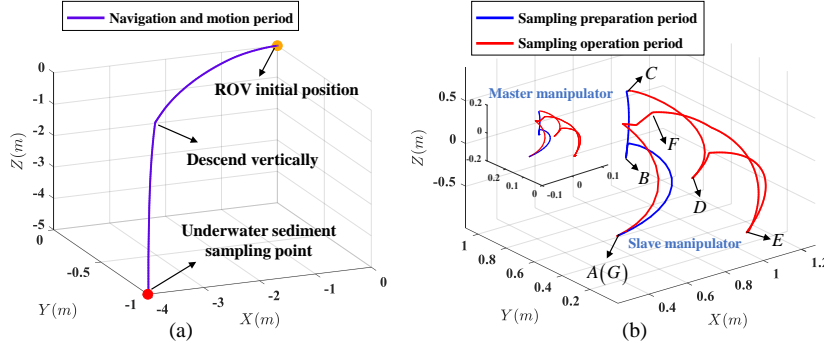


Fig. 9 The motion during the full operation process of the work-class ROV and its manipulator for the underwater sediment sampling task: (a) the planned practical trajectory of the work-class ROV; (b) the end effector's displacement of the teleoperated master and slave manipulators. ROV, remotely operated vehicle.

and the good control performance of SMC controller, the ROV initially moves toward the target point (i.e., the underwater sediment sampling point) in the horizontal direction until it approaches the place above the target point. Subsequently, the ROV begins to descend vertically at a constant speed until it reaches the target point. To verify the effectiveness of the teleoperation control framework, the end effector's displacement of the master and slave manipulators is selected, shown in Fig. 9b. The two curves shown in Fig. 9b have the same shape, direction, and proportional size: this means that the RBFNN-based slave controller and workspace-based asymmetric mapping algorithm under modified wave-variable architecture can achieve good accuracy during the teleoperation process. In Fig. 9b, the trajectory formed by A, B, and C is the sampling preparation period, corresponding to Figs. 8c-e. Subsequently, the trajectory formed by C, D, E, F, and G represents the sampling operation period, corresponding to Figs. 8f-h.

The results in Fig. 10 illustrate that the time delays of the underwater sediment sampling experiment are about 0.5 s, the force feedback and the real environmental force are quite similar in the shape and value of the curves, which show that the wave-variable architecture and the environmental force perception and feedback method can ensure great force-feedback accuracy in the process of underwater sediment sampling. In detail, in the process of grasping the mud picker with the manipulator, there always exists an environmental force on the X- and Y-axes. Particularly, when the manipulator grasps the mud picker from the collection box from A to

B in Fig. 9b, the environmental force on the Z-axis gradually increases; when the manipulator grasps the mud picker and leaves the collection box, the environmental force on the Z-axis gradually decreases; subsequently, when the manipulator descends vertically from D to E for sampling the sediment, the environmental force on the Z-axis starts to increase again; lastly, when finishing sampling and pulling out the mud picker, the environmental force on the Z-axis decreases. Based on the force perception and feedback method in Section 3.4, the human operator can obtain accurate force feedback via the Omni driver of the master manipulator.

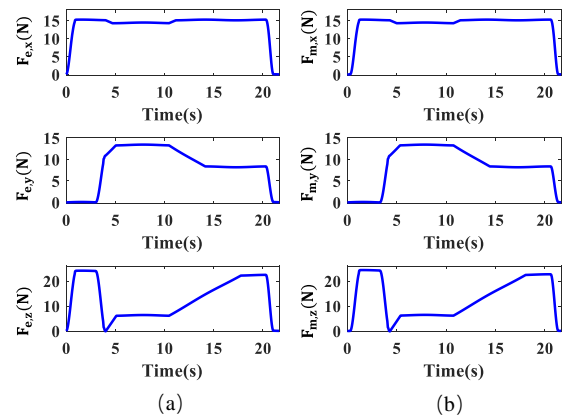


Fig. 10 The environmental force in the underwater sediment sampling process: (a) real environmental force F_e on the slave side; (b) force feedback F_m on the master side.

4.3 Case 2: underwater pipeline docking

The experiment of underwater pipeline docking is designed to verify the effectiveness of the digital simulation platform in the teleoperation of multiple slave manipulators. For a good presentation of the experiment, the condition SET 2-C5 is selected to show the experimental result (see Section 2 of Supplementary materials).

4.4 User study analysis

Considering that the human operator's operational experience in the operation mode is important to the underwater tasks, a user study on the operation mode with teleoperated manipulation is carried out. The results of the user study for these six volunteers are analyzed in this section.

The user study SET 1 is designed to verify the training effects of the proposed digital simulation platform for an inexperienced human operator, to increase the experience for implementing the tasks after the training. The results of user study SET 1 are shown in Fig. 11 wherein the conclusions of the sediment sampling and pipeline docking tasks are basically the same. Specifically, the time required for a human operator without virtual training is 95.63 s and 121.58 s to complete the sampling or docking tasks, respectively. After 8 rounds of training, the completion time decreases by 57.4% and 58.4%, respectively, that is, with the increase of training rounds, the human operator becomes more familiar with the process of sampling or docking, and the completion time can be significantly reduced. Thus, with regard to the user study SET 1, it can be verified that the proposed digital simulation platform has good training effects for a human operator who is a green hand on the underwater operation tasks.

The user study SET 2 is designed to verify the telepresence improvement of the proposed platform: five volunteers - who are well trained with 20 rounds of training and who can thus be regarded as experts in later experiments - are chosen. The results of user study SET 2 are shown in Fig. 12. C1 has only the SP without considering the EFF and AMA, so it has the lowest success ratio and the highest completion time and workload. Since C2, C3, and C5 add the proposed AMA, their completion times and the workloads are significantly decreased compared to those of C4. Particularly, the main difference be-

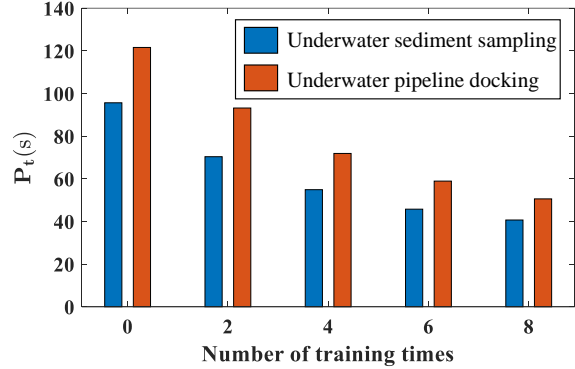


Fig. 11 The result of the user study SET 1: (a) underwater sediment sampling; (b) underwater pipeline docking.

tween C4 and C5 is the presence of the AMA. Thus, C5 shows a significant improvement in all the three metrics when compared with C4; this is because the proposed AMA matches the workspace of the master and slave manipulators; as a result, the human operator can teleoperate to complete the sampling or docking tasks by commanding the master manipulator over a shorter distance, which reduces the workload and improves the operation efficiency. Additionally, since C5 adds the VP, C5 also shows significant improvement in all the three metrics when compared with C3. This is because the VP can assist the human operator to observe the operation process from different perspectives, which avoids the failure caused by the parallax effect of the camera. Since C5 adds the EFF, C5 also has a significant improvement in all the three metrics when compared with C2; this is because the EFF can accurately provide the human operator with the force information from the interaction between the slave manipulator and the remote environment, which helps he sampling or docking tasks. Moreover, when comparing C2, C3, and C5 horizontally, the VP can greatly reduce the completion time, while the EFF can greatly reduce the workload. Thus, with regard to the user study SET 2, the proposed digital simulation platform (under condition C5) can provide a human operator with the optimal visual-and-force-assisted telepresence and obtain the highest success ratio, the lowest completion time, and the lowest work-load.

Particularly, Fig. 13 shows the results of the work load P_o in SET 2 obtained from the NASA-TLX. In detail, Fig. 13a indicates that the physical demand (I_2) in C4 during the sediment sampling task

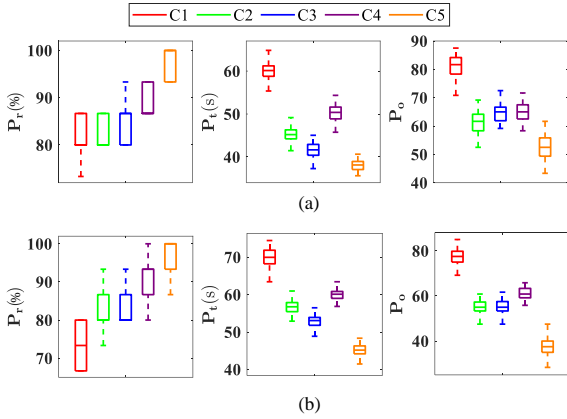


Fig. 12 The result of the user study SET 2: (a) underwater sediment sampling; (b) underwater pipeline docking.

is 36.37% higher than that in C5, since C4 does not apply the proposed AMA and the slave manipulator has a larger workspace compared with the master manipulator. If the workspace is not well matched, the human operator has to operate the master manipulator over a longer distance, which finally leads to higher I_2 . When comparing C3 and C5, the mental demand (I_1) in C3 is 40% higher than that in C5; this is because the human operator can only observe the slave manipulator in a single perspective; this easily causes the parallax and renders it difficult to judge the position of the mud picker, which increases the I_1 . Additionally, the effort (I_5) in C2 is 36.37% higher than that in C5; this is because C2 does not consider the EFF, so the operator needs to operate the slave manipulator more carefully to avoid excessive force or collision during the interaction between the manipulator and the working environment.

It can be seen from Fig. 13b that the results of the pipeline docking task are similar to that of the sediment sampling task. Specifically, when compared with C5, I_2 in C4 without the proposed AMA is 75% higher, I_1 in C3 without the SP is 62.5% higher, and I_5 in C2 without the EFF is 100% higher; that is, with the increase of the task complexity, the work load P_o of the human operator increases greatly. Thus, through the user study SET 2, it can be proved that the proposed digital simulation platform (C5) effectively reduces the work load of the human operator, and the more complicated the tasks, the more significant is the reduction effect.

Remark 6 Based on the user study carried out to evaluate the virtual training process for the under-

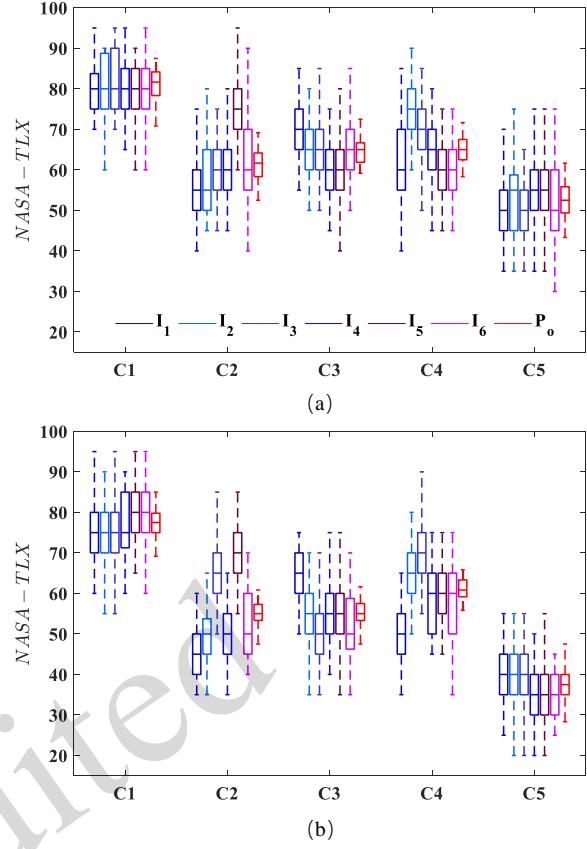


Fig. 13 The result of the NASA-TLX in SET 2: (a) underwater sediment sampling; (b) underwater pipeline docking.

water sediment sampling and pipeline docking tasks, using the metrics listed in Section 4.1, the designed digital simulation platform is found to have good applicability. With regard to the comparison with the real video signal and the result of the user study, the visual information and the in-situ data are accurately created and displayed on the screen, while the force feedback is provided via the Omni driver, which are all achieved by comprehensive perception of the visual and force information of the underwater environment. Thus, by using the proposed digital simulation platform, the human operator can effectively be trained to implement the underwater operation tasks with immersive telepresence. ■

5 Conclusions

This paper presents a digital simulation platform for the full operation process of work-class ROVs, which achieves low-cost and immersive under-

water teleoperation training with quality-improved telepresence using the recorded in-situ data. To make this digital simulation platform more powerful, a data interface is designed for the recorded in-situ data virtual training and for helping to test and improve the related algorithms. Several algorithms are implemented to ensure the integrity of the proposed platform, which shows the effectiveness of the simulation for navigation, motion, and teleoperated manipulation of work-class ROVs. To further evaluate the superiority and accuracy of the digital simulation platform for immersive underwater teleoperation training, a user study focused on the ROV operation mode is carried out with the specific underwater sediment sampling and pipeline docking tasks, which shows that the proposed digital simulation platform can provide the human operator with immersive visual-and-force-assisted telepresence and thus helps him/her gain experience through training before the real underwater test.

In the future, we will investigate advanced navigation and control algorithms, in addition to topics related to more realistic ROV hydrodynamic modeling and underwater physical parameters, within the proposed digital simulation platform.

Contributors

Fanghao HUANG designed the research. Fanghao HUANG, Xiao YANG and Xuanlin CHEN processed the data and drafted the paper. Deqing MEI and Zheng CHEN helped organize the paper. All the authors revised and finalized the paper.

Conflict of interest

All the authors declare that they have no conflict of interest.

References

- Cárdenas EF, Dutra MS, 2016. An augmented reality application to assist teleoperation of underwater manipulators. *IEEE Lat Am Trans*, 14(2):863-869. <https://doi.org/10.1109/TLA.2016.7437233>
- Chen Z, Huang FH, Sun WC, et al., 2020. Rbf-neural-network-based adaptive robust control for nonlinear bilateral teleoperation manipulators with uncertainty and time delay. *IEEE/ASME Trans Mech*, 25(2):906-918. <https://doi.org/10.1109/TMECH.2019.2962081>
- Chen Z, Helian BB, Zhou Y, et al., 2023. An integrated trajectory planning and motion control strategy of a variable rotational speed pump-controlled electro-hydraulic actuator. *IEEE/ASME Trans Mech*, 28(1):588-597. <https://doi.org/10.1109/TMECH.2022.3209873>
- Chen Z, Zhou SZ, Shen C, et al., 2024. Observer-based adaptive robust precision motion control of a multi-joint hydraulic manipulator. *IEEE/CAA J Autom Sin*, 11(5):1213-1226. <https://doi.org/10.1109/JAS.2024.124209>
- Ferreira A, Mavroidis C, 2006. Virtual reality and haptics for nanorobotics. *IEEE Rob Autom Mag*, 13(3):78-92. <https://doi.org/10.1109/MRA.2006.1678142>
- Forbrigger S, Pan YJ, 2018. Improving haptic transparency for uncertain virtual environments using adaptive control and gain-scheduled prediction. *IEEE Trans Haptics*, 11(4):543-554. <https://doi.org/10.1109/TOH.2018.2839182>
- Hart SG, Staveland LE, 1988. Development of NASA-TLX (Task Load Index): Results of Empirical and Theoretical Research. North-Holland, Amsterdam, p.139-183. [https://doi.org/10.1016/S0166-4115\(08\)62386-9](https://doi.org/10.1016/S0166-4115(08)62386-9)
- Hokayem PF, Spong MW, 2006. Bilateral teleoperation: An historical survey. *Automatica*, 42(12):2035-2057. <https://doi.org/10.1016/j.automatica.2006.06.027>
- Huang FH, Chen XL, Xu Y, et al., 2023. Immersive virtual simulation system design for the guidance, navigation and control of unmanned surface vehicles. *Ocean Eng*, 281:114884. <https://doi.org/10.1016/j.oceaneng.2023.114884>
- Khadhraoui A, Beji L, Otmane S, et al., 2016. Stabilizing control and human scale simulation of a submarine roV navigation. *Ocean Eng*, 114:66-78. <https://doi.org/10.1016/j.oceaneng.2015.12.054>
- Khatib O, Yeh X, Brantner G, et al., 2016. Ocean one: A robotic avatar for oceanic discovery. *IEEE Rob Autom Mag*, 23(4):20-29. <https://doi.org/10.1109/MRA.2016.2613281>
- Kinsey JC, Yang QJ, Howland JC, 2014. Nonlinear dynamic model-based state estimators for underwater navigation of remotely operated vehicles. *IEEE Trans Control Syst Technol*, 22(5):1845-1854. <https://doi.org/10.1109/TCST.2013.2293958>
- Li HJ, Huang FH, Chen Z, 2022. Virtual-reality-based online simulator design with a virtual simulation system for the docking of unmanned underwater vehicle. *Ocean Eng*, 266:112780. <https://doi.org/10.1016/j.oceaneng.2022.112780>
- Lin QP, Kuo CG, 2001. On applying virtual reality to underwater robot tele-operation and pilot training. *Int J Virtual Reality*, 5:71-91.
- Liu Y, Shen Q, Ma DL, et al., 2017. Steering control for underwater gliders. *Front Inf Technol Electron Eng*, 18(7):898-914. <https://doi.org/10.1631/FITEE.1601735>
- Long CQ, Hu MJ, Qin XH, et al., 2022. Hierarchical trajectory tracking control for rovs subject to disturbances and parametric uncertainties. *Ocean Eng*, 266:112733. <https://doi.org/10.1016/j.oceaneng.2022.112733>
- Lu Y, Chen XY, Wu ZX, et al., 2022. A novel robotic visual perception framework for underwater operation. *Front Inf Technol Electron Eng*, 23(11):1602-1619. <https://doi.org/10.1631/FITEE.2100366>
- Manzanilla A, Reyes S, Garcia M, et al., 2019. Autonomous navigation for unmanned underwater vehicles: Real-time experiments using computer vision. *IEEE Rob Autom Lett*, 4(2):1351-1356. <https://doi.org/10.1109/LRA.2019.2895272>

- Reichherzer C, Cunningham A, Walsh J, et al., 2018. Narrative and spatial memory for jury viewings in a reconstructed virtual environment. *IEEE Trans Vis Comput Graph*, 24(11):2917-2926.
<https://doi.org/10.1109/TVCG.2018.2868569>
- Sivčev S, Coleman J, Omerdić E, et al., 2018b. Underwater manipulators: A review. *Ocean Eng*, 163:431-450.
<https://doi.org/10.1016/j.oceaneng.2018.06.018>
- Sun WC, Yuan YQ, 2023. Passivity based hierarchical multi-task tracking control for redundant manipulators with uncertainties. *Automatica*, 155:111159.
<https://doi.org/10.1016/j.automatica.2023.111159>
- Sun YX, Gu R, Chen XH, et al., 2022. Efficient time-optimal path planning of auv under the ocean currents based on graph and clustering strategy. *Ocean Eng*, 259:111907.
<https://doi.org/10.1016/j.oceaneng.2022.111907>
- Tani S, Ruscio F, Bresciani M, et al., 2023. Development and testing of a navigation solution for autonomous underwater vehicles based on stereo vision. *Ocean Eng*, 280:114757.
<https://doi.org/10.1016/j.oceaneng.2023.114757>
- Wang J, Tang YG, Chen CX, et al., 2020. Terrain matching localization for hybrid underwater vehicle in the challenger deep of the mariana trench. *Front Inf Technol Electron Eng*, 21(5):749-759.
<https://doi.org/10.1631/FITEE.1900556>
- Xia PX, Xu F, Song ZY, et al., 2023. Sensory augmentation for subsea robot teleoperation. *Comput Ind*, 145:103836.
<https://doi.org/10.1016/j.compind.2022.103836>
- Yuan YQ, Sun WC, 2023. An integrated kinematic calibration and dynamic identification method with only static measurements for serial robot. *IEEE/ASME Trans Mech*, 28(5):2762-2773.
<https://doi.org/10.1109/TMECH.2023.3241302>
- Zhang DW, Yang G, Khurshid RP, 2020. Haptic teleoperation of uavs through control barrier functions. *IEEE Trans Haptic*, 13(1):109-115.
<https://doi.org/10.1109/TOH.2020.2966485>
- Zhang HP, Zhu DQ, Liu CX, et al., 2022. Tracking fault-tolerant control based on model predictive control for human occupied vehicle in three-dimensional underwater workspace. *Ocean Eng*, 249:110845.
<https://doi.org/10.1016/j.oceaneng.2022.110845>
- Zhang JJ, Liu WD, Gao LE, et al., 2018. The master adaptive impedance control and slave adaptive neural network control in underwater manipulator uncertainty teleoperation. *Ocean Eng*, 165:465-479.
<https://doi.org/10.1016/j.oceaneng.2018.07.055>
- Zhang J, Li W, Yu JC, et al., 2017a. Development of a virtual platform for telepresence control of an underwater manipulator mounted on a submersible vehicle. *IEEE Trans Ind Electron*, 64(2):1716-1727.
<https://doi.org/10.1109/TIE.2016.2557309>
- Zhang J, Li W, Yu JC, et al., 2017b. Study of manipulator operations maneuvered by a rovs in virtual environments. *Ocean Eng*, 142:292-302.
<https://doi.org/10.1016/j.oceaneng.2017.07.008>
- Zhao B, Skjetne R, Blanke M, et al., 2014. Particle filter for fault diagnosis and robust navigation of underwater robot. *IEEE Trans Control Syst Technol*, 22(6):2399-2407.
<https://doi.org/10.1109/TCST.2014.2300815>