Caihong LI, Cong LIU, Yong SONG, Zhenying LIANG, 2023. Parameter value selection strategy for complete coverage path planning based on the Lü system to perform specific types of missions. *Frontiers of Information Technology & Electronic Engineering*, 24(2):231-244. https://doi.org/10.1631/FITEE.2200211

Parameter value selection strategy for complete coverage path planning based on the Lü system to perform specific types of missions

Front Inform Technol Electron Eng

Key words: Chaotic mobile robot; Lü system; Complete coverage path planning (CCPP); Parameter value selection strategy; Lyapunov exponent; Pearson correlation coefficient

Corresponding author: Caihong LI
E-mail: lich@sdut.edu.cn
ORCID: https://orcid.org/0000-0003-0255-9249

Motivation

1. The mobile robots with chaotic characteristics of topological transitivity and sensitive dependence on initial conditions can meet the need of performing the specific types of missions.

2. There is a lack of systematic research on the system parameters and the chaotic and random characteristics of the variables used.

3. We want to select the optional values of the system parameters and chaotic variables with the best random performance to construct a chaotic robot to produce the trajectory with higher randomness and coverage rate.

Front Inform Technol Electron Eng

Main idea

1. The coverage rates of the trajectory generated by the chaotic robot, which are constructed by different values of parameters and variables, are different at the same time; they are also distinct under the same set of values due to sensitivity characteristics.

2. Selecting the parameter values for chaotic system is a complex problem. Any method is not enough to determine the best value range. Therefore, it is necessary to comprehensively consider various methods to determine the system parameter values.

Front Inform Technol Electron Eng

Method

1. We introduce a comprehensive selection strategy based on the Lü system to gradually determine the optional value range of its parameter value.

2. We study the change in chaotic performance with the system parameter value varying by analyzing the dissipative system, the Lyapunov exponents, the phase plane, and the Pearson correlation coefficients of the variables.

3. We construct a chaotic mobile robot by combining the Lü system using the chosen chaotic variables and the parameter values with the kinematic equation of the robot to perform the CCPP task for the specific types of missions.

Front Inform Technol Electron Eng

Major results

- Value range of parameter *c* of being a dissipative system

$$\nabla V = \frac{\partial \dot{x}}{\partial x} + \frac{\partial \dot{y}}{\partial y} + \frac{\partial \dot{z}}{\partial z}. \qquad (3)$$


$$\nabla V = \frac{\partial \dot{x}}{\partial x} + \frac{\partial \dot{y}}{\partial y} + \frac{\partial \dot{z}}{\partial z} = -a + c - b = -36 + c - 3 = -39 + c < 0$$

The good range of the parameter: $c < 39$

Front Inform Technol Electron Eng

Major results (Cont'd)

- Analysis of L_E spectrum of the Lü system

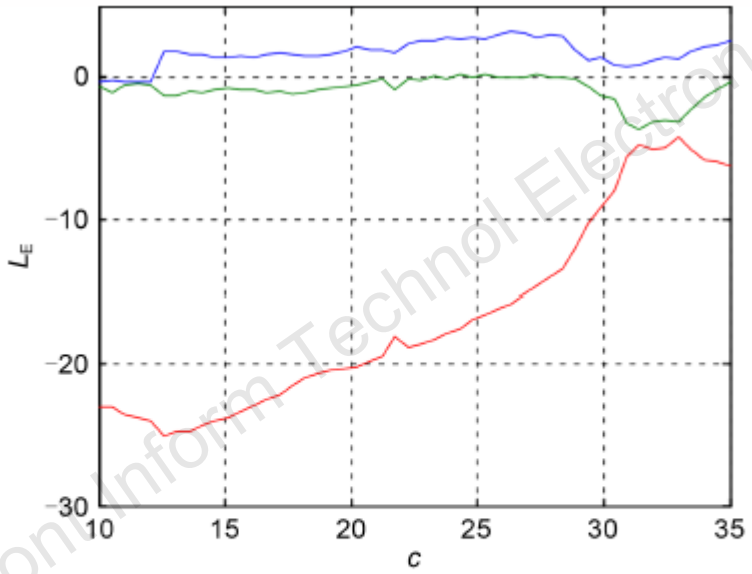

Front Inform Technol Electron Eng


Fig. 2 L_E spectrum of the Lü system

The three lines represent the maximum, medium, and minimum indices of L_E from top to bottom, which are represented by L_{E1}, L_{E2}, and L_{E3}, respectively

The good range of the parameter: $c \in [14, 35]$

Major results (Cont'd)

- Analysis of phase plane

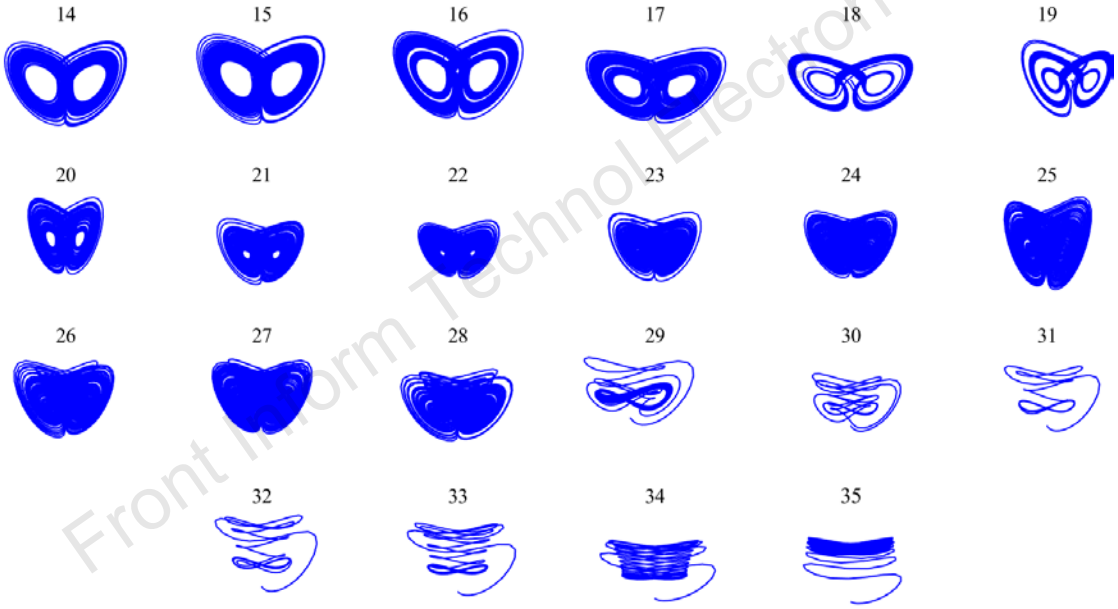

Front Inform Technol Electron Eng

Fig. S4 The phase planes of *x*-*z* at each integer value of system *c* of the Lü system ($c \in [14, 35]$)

The good range of the parameter: $c \in [20, 28]$

Major results (Cont'd)

- L_E analyzing

Table 1 L_E values when $c \in [20, 28]$

c	L_{E1}	L_{E2}	L_{E3}
20	1.898	−0.461	−20.296
21	2.042	−0.480	−19.465
22	2.185	−0.040	−19.070
23	2.511	−0.016	−18.434
24	2.740	0.207	−17.897
25	2.884	0.170	−17.020
26	3.002	0.132	−16.105
27	3.209	0.002	−15.191
28	2.893	0.054	−13.936

Front Inform Technol Electron Eng

The good range of the parameter: $c \in [24, 27]$

Major results (Cont'd)

- Pearson correlation coefficient

$$\begin{cases} \bar{X} = \frac{1}{N}\sum_{i=1}^{n} X_i, \\ \bar{X}' = \frac{1}{N}\sum_{i=1}^{n} X_i'. \end{cases} \quad (4)$$

$$\begin{cases} D(X) = \frac{1}{N}\sum_{i=1}^{N} (X_i - \bar{X}), \\ D(X') = \frac{1}{N}\sum_{i=1}^{N} (X_i' - \bar{X}'). \end{cases} \quad (5)$$

$$\mathrm{Cov}(X, X') = \frac{1}{N}\sum_{i=1}^{N} (X_i - \bar{X})(X_i' - \bar{X}'). \quad (6)$$

$$P_{XX'} = \frac{\mathrm{Cov}(X, X')}{\sqrt{D(X)D(X')}}. \quad (7)$$

Front Inform Technol Electron Eng

Major results (Cont'd)

- Pearson correlation coefficient

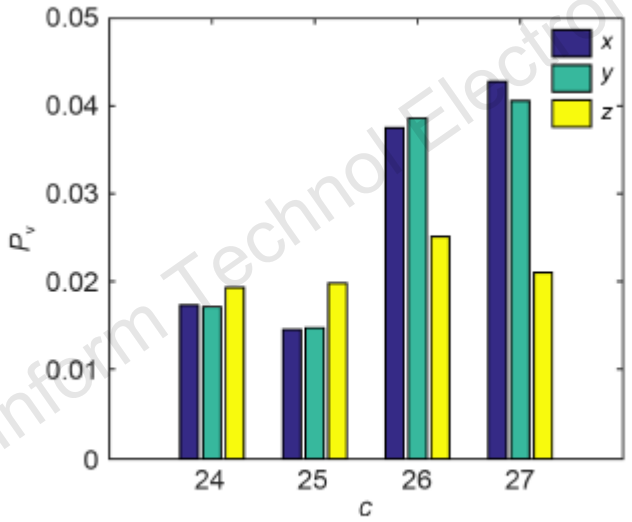


Fig. 3 Comparison of P_v of the Lü system

Front Inform Technol Electron Eng

The good range of the parameter: $c \in [24, 25]$

The good variables of the system: x or y

Major results (Cont'd)

- Construction of the chaotic mobile robot

$$\begin{cases} \dot{x} = a(y - x), \\ \dot{y} = cy - xz, \\ \dot{z} = xy - bz, \\ \dot{x}_r = v_{rt} \cos x, \\ \dot{y}_r = v_{rt} \sin x. \end{cases} \tag{9}$$

Front Inform Technol Electron Eng

Major results (Cont'd)

- Coverage performance evaluation of chaotic robot

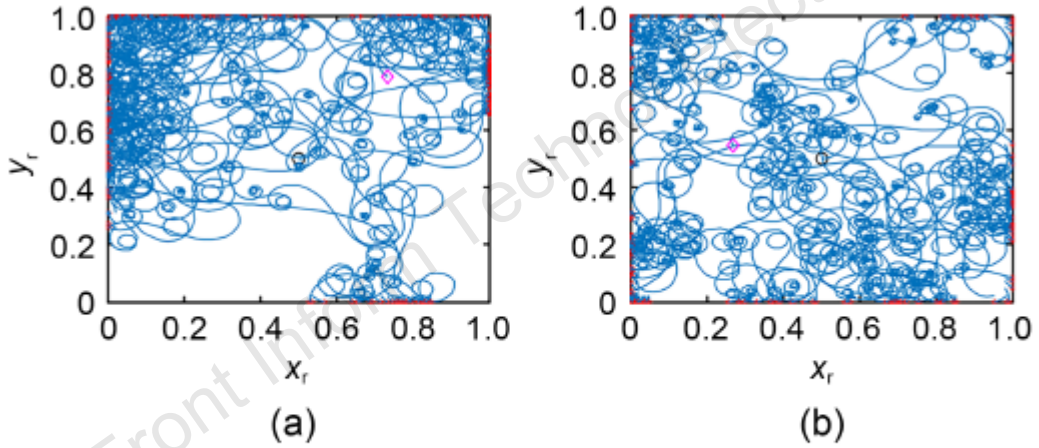


Fig. 7 Coverage trajectories formed after static obstacle avoidance based on the Lü system: (a) c=20; (b) c=24

Front Inform Technol Electron Eng

Major results (Cont'd)

- Coverage performance evaluation of chaotic robot

Table 3 The mean coverage rate of the constructed chaotic robot based on the Lü system when $c \in [24, 27]$

c	x (%)	y (%)	z (%)	c_{xyz} (%)
24	97.1	96.5	95.1	96.2
25	97.6	96.6	95.5	96.5
26	88.5	89.1	92.2	89.9
27	83.8	86.9	92.6	87.7

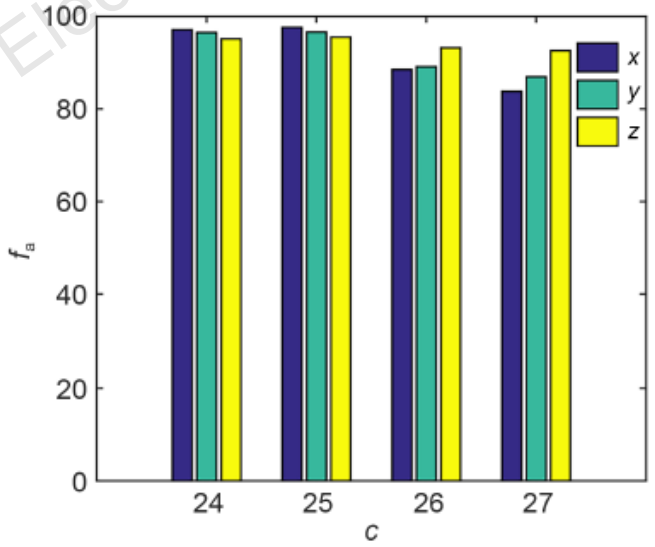


Fig. 8 Comparison of the mean coverage rate based on the Lü system when $c \in [24, 27]$

Front Inform Technol Electron Eng

Conclusions

1. It is easier to generate the coverage trajectory with good randomness and high coverage rate to choose the Lü system as the construction equation of the chaotic robot due to its better chaotic performance and randomness.

2. Combining the deterministic system, phase plane, L_E index, and Pearson correlation coefficient can gradually reduce the selection range of parameters and finally determine the best values of parameters and variables to construct a chaotic robot with high randomness and coverage rate.

Front Inform Technol Electron Eng

Conclusions (Cont'd)

3. The system parameters and variables with a high coverage rate can be chosen by considering only the chaotic characteristics and randomness of the system and variables.

4. The system can also obtain better distribution characteristic of individual variables in the positions where the parameter combinations have a lower value of L_E and the average coverage rate is low. The value of the average coverage rate is basically consistent with that of L_E.

Front Inform Technol Electron Eng

Conclusions (Cont'd)

5. This method is universal. It is applicable not only to Lü and Lorenz systems, but also to Arnold, Rössler, Chua and other three-dimensional chaotic systems that can be used to construct the chaotic robot to perform the CCPP task.

Front Inform Technol Electron Eng



Caihong LI received her BS degree in Industrial Automation from Southwest University of Science and Technology, Mianyang, China, in 1993, MS degree in Control Science from Shandong University of Science and Technology, Jinan, China, in 2000, and PhD degree in Detection Technology and Automation Device from Shandong University, Jinan, China, in 2007. She is currently a professor with the School of Computer Science and Technology, Shandong University of Technology, China. Her research interests include intelligent mobile robot control, path planning for the mobile robot, and the applications of chaotic theory in the complete coverage path planning.



Cong LIU received his BS and MS degrees in computer software and theory from the Shandong University of Science and Technology, Qingdao, China, in 2013 and 2015, respectively, and PhD degree in computer science and information systems from the Eindhoven University of Technology, Eindhoven, the Netherlands, in 2019. He is currently a professor with the School of Computer Science and Technology, Shandong University of Technology. His current research interests include business process management, process mining, and Petri nets. He is a member of IEEE.

Front Inform Technol Electron Eng



Song YONG received his BS degree in Control Science from Shandong University, Weihai, China, in 2001. He received the MS and PhD degrees in Pattern Recognition and Intelligent System from Shandong University, in 2008 and 2012, respectively. He is currently a professor with the School of Mechanical, Electrical & Information Engineering, Shandong University, Weihai, China. His current research interests include intelligent robot control, machine learning, and swarm intelligence robotics.



Zhenying LIANG received her BS degree from the Department of Mathematics, Shandong Normal University, Jinan, China, in 1986, and PhD degree from the University of Shanghai for Science and Technology, Shanghai, China, in 2011. Since 1986, she has been working with School of Mathematics and Statistics, Shandong University of Technology, Zibo, China. She is currently a professor with the research interest in nonlinear control, complex nonholonomic mobile robot control, and advanced mathematics education.

Front Inform Technol Electron Eng