Zhaowei CHANG, Jianhua ZHANG, Pan TANG, Lei TIAN, Li YU, Guangyi LIU, Liang XIA, 2023. Frequency–angle two-dimensional reflection coefficient modeling based on terahertz channel measurement. *Frontiers of Information Technology & Electronic Engineering*, 24(4):626-632.
https://doi.org/10.1631/FITEE.2200290

Frequency–angle two-dimensional reflection coefficient modeling based on terahertz channel measurement


Front Inform Technol Electron Eng

Key words: Terahertz communication; Reflection coefficient modeling; Incident angle; Building materials; Fresnel model

Zhaowei CHANG, Jianhua ZHANG
E-mail: changzw12345@bupt.edu.cn; jhzhang@bupt.edu.cn
ORCID: https://orcid.org/0000-0002-8689-410X;
https://orcid.org/0000-0002-6492-3846

Challenges and tendency


- The 6G communication system shows an obvious expansion trend in the aspects of scene and technology.
- To meet the increasing demand for higher data rates, THz communication between 0.1 and 10 THz is attracting a great deal of attention due to its wide bandwidth, which can support much high data rates from tens of Gb/s to a few Tb/s.

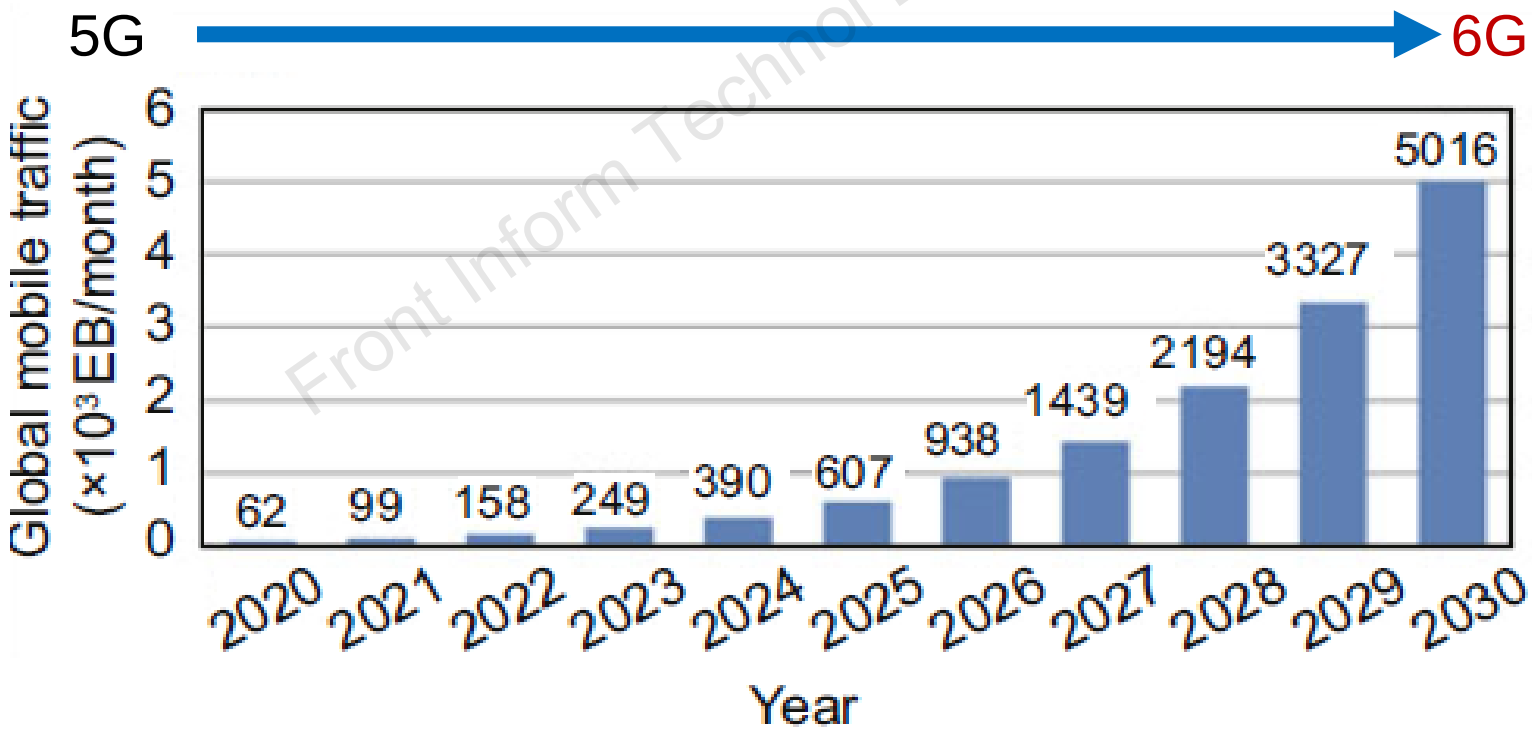

Front Inform Technol Electron Eng

Motivation

- THz channel propagation characteristics play an important role in the design, evaluation, and optimization of THz communication systems.
- Furthermore, due to the short wavelength at THz bands, the propagation mechanisms, i.e., reflection and diffraction, may change. Therefore, it is quite necessary to measure and model the reflection coefficients at THz bands.

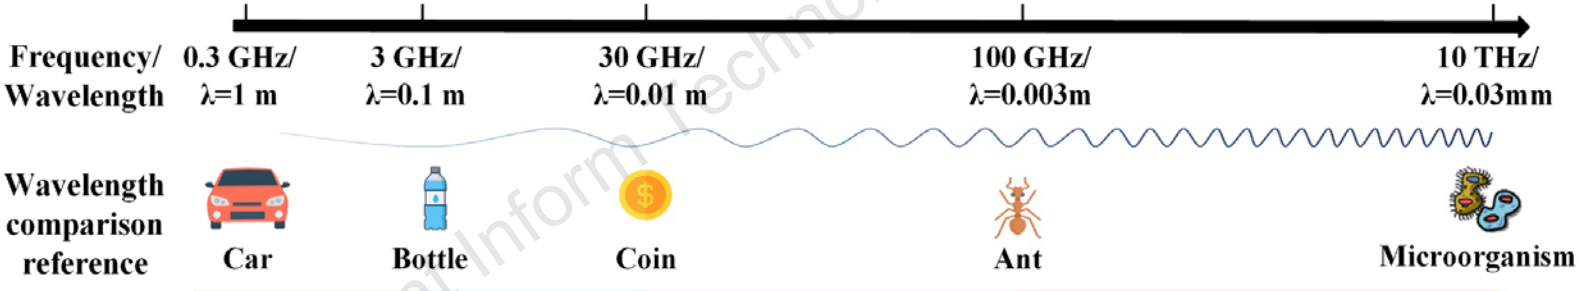



Propagation characteristics	• Direct propagation, reflection, diffraction ability. • The transmission and penetration loss are small, and the penetration ability is weak. • Supporting wide coverage, but it has limited bandwidth.	• Direct propagation, reflection predominate, diffraction ability is weak. • High penetration loss. • Supporting large capacity communication and radar ranging.	• Affecting by atmospheric easily. • Strong penetration ability. • Spectrum resources are rich. Supporting high-resolution imaging, and environmental sensing.
Typical applications	• Radio, television, voice calls.	• Time frequency call, live broadcast.	• Security check, imaging, perception.

Front Inform Technol Electron Eng

1) THz reflection measurements

- The five building materials (i.e., glass, tile, board, plasterboard, and aluminum alloy) are fixed at the clamp successively with the transmitter (TX) and receiver (RX) antennas.
- The reflection coefficients of the vertically polarized signal are measured from 10° to 80° in a step of 10°.
- In addition, the measurement is performed from 220 to 320 GHz in a step of 10 GHz except 270 and 310 GHz.

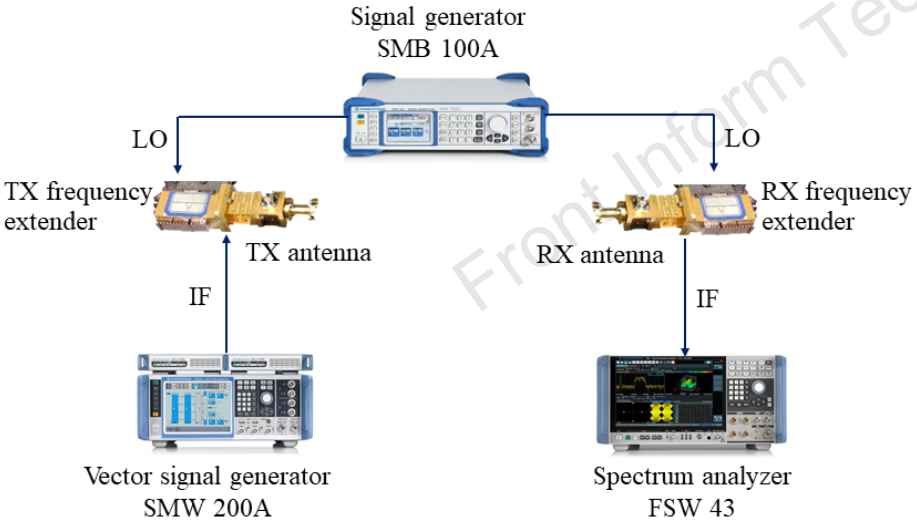


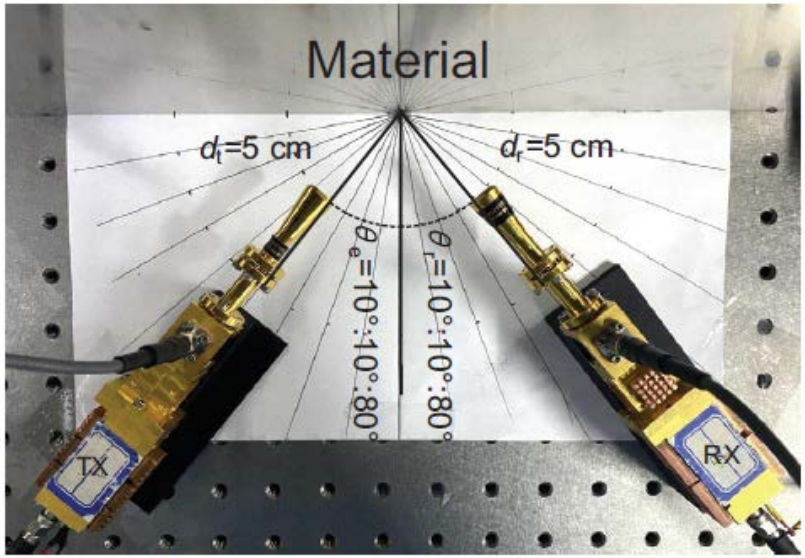



Front Inform Technol Electron Eng


2) THz reflection coefficient analysis


- The reflection coefficients and the growth rates of non-metallic materials increase with the increase of the incident angle. The reflection coefficients of metallic materials are stable at around 0.8.
- Aluminum alloy>tile>glass>board>plasterboard. The materials with larger complex dielectric constants can reflect more power.

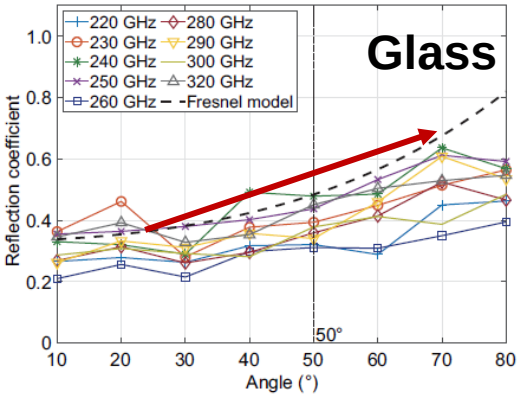


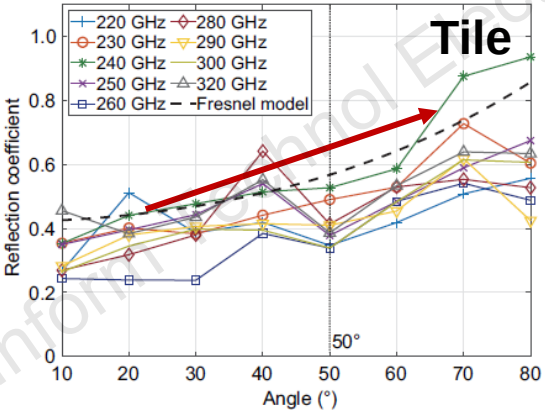

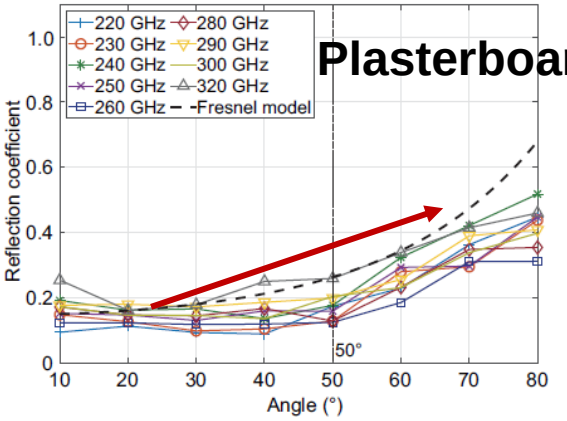

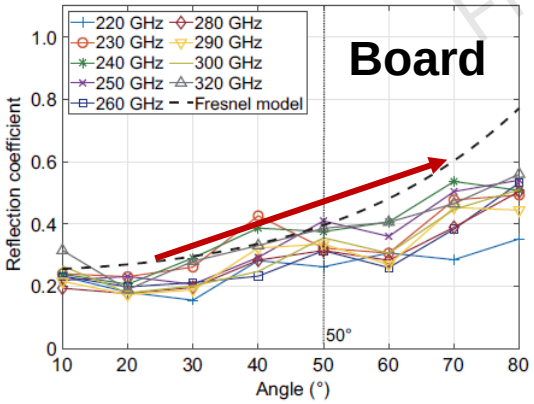

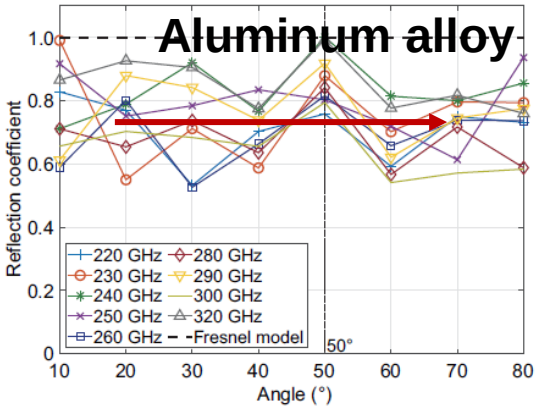

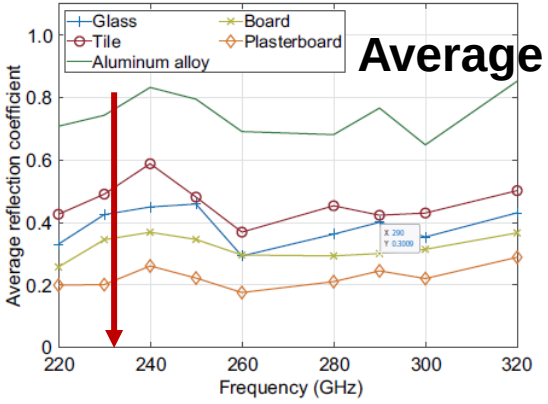

Front Information Optoelectronics Engineering

3) THz reflection coefficient modeling

- Traditional reflection coefficient models are limited by unknown permittivity at THz. We propose a frequency–angle two-dimensional reflection coefficient model with small fitting deviation.

Frequency–angle reflection coefficient model: $\rho(f,\theta) =$

$$e^{-10^a f^2 \cos^2\theta}\left(\frac{\cos\theta-\sqrt{1+\frac{10^b}{10^c-df^2-\mathrm{j}f}-\sin^2\theta}}{\cos\theta+\sqrt{1+\frac{10^b}{10^c-df^2-\mathrm{j}f}-\sin^2\theta}}\right) \qquad e^{-10^a f^2 \cos^2\theta}\left(\frac{\cos\theta-\sqrt{1-\frac{10^b}{df^2+\mathrm{j}f}-\sin^2\theta}}{\cos\theta+\sqrt{1-\frac{10^b}{df^2+\mathrm{j}f}-\sin^2\theta}}\right)$$

with $\omega = 2\pi f$, a=lg($8\pi^2\sigma_h{}^2/c^2$), b=lg($\omega^2{}_p/(2\pi\gamma)$), c=lg($\omega^2{}_0/2\pi\gamma$), d=$2\pi/\gamma$

Fresnel model: $\rho_s = e^{-8\left(\frac{\pi\sigma_h\cos\theta}{\lambda}\right)^2}\left(\frac{\cos\theta-\sqrt{\boldsymbol{\varepsilon}-(\sin\theta)^2}}{\cos\theta+\sqrt{\boldsymbol{\varepsilon}-(\sin\theta)^2}}\right)$

Substitute $\boldsymbol{\varepsilon}$


Lorenz model: $\boldsymbol{\varepsilon} = 1+\frac{\omega_p{}^2}{\omega_0{}^2-\omega^2-\mathrm{j}\gamma\omega}$ $\qquad \omega_p{}^2 = \frac{Ne^2}{m\varepsilon_0}$ $\qquad$ Drude model: $\boldsymbol{\varepsilon} = 1-\frac{\omega_p{}^2}{\omega^2+\mathrm{j}\gamma\omega}$


ε: dielectric coefficient; N: number of electrons per unit volume; ε_0: permittivity of vacuum 8.85×10^{-12} F/m; e: unit positive charge 1.6×10^{-19} C; ω_0: the resonant frequency; m: the mass of an electron 9.3×10^{-31} kg; γ: damping constant; σ_h: the standard deviation of the surface roughness

Front Inform Technol Electron Eng

3) THz reflection coefficient modeling

- It is found that the FARC model fits the measurement results better than the Fresnel model at the dimension of angle.
- The points of measurement data fit well with the FARC model.

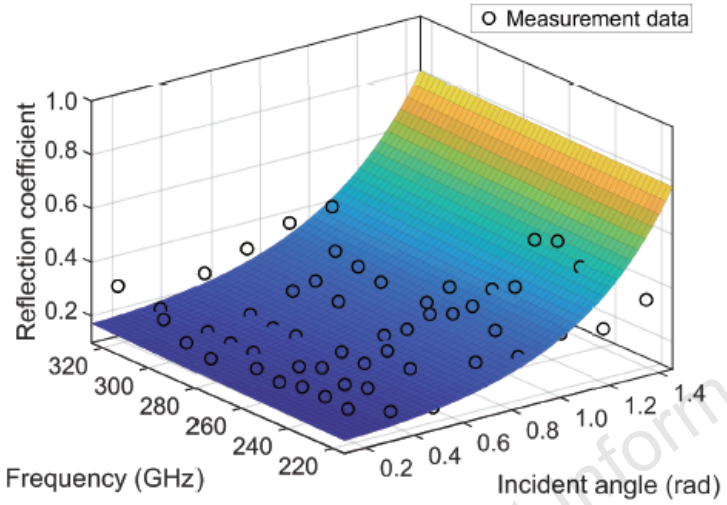

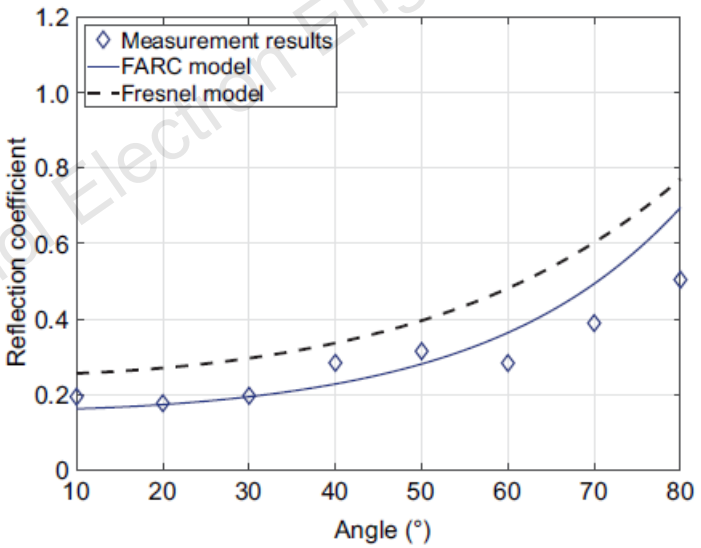

Front Inform Technol Electron Eng

Table 2 Fitted parameters of five materials at nine frequency points

Material	a	b	c	d	RMSE
Glass	−15.45	3.93	3.97	0.06	0.11
Tile	−15.18	3.96	3.72	0.02	0.12
Board	−15.30	3.89	4.04	0.03	0.10
Plasterboard	−15.66	3.57	4.33	0.10	0.08
Aluminum alloy	−15.31	6.26	–	0.002	0.16

RMSE: root-mean-square error

Conclusions

- In general, the analysis and modeling of reflection coefficients of building materials in terahertz band are studied.
  - Based on an extensive measurement campaign from 220 to 320 GHz, the reflection coefficients of five building materials are obtained.
  - By comparing with the Fresnel model, the relationships between reflection coefficient and frequency, incidence angle and material are studied.
  - An FARC reflection coefficient model was proposed based on the Fresnel, Lorenz, and Drude models.
  - By fitting all the measured data with the FARC statistical model, the reflection coefficients of the five materials in continuous large band were obtained.
- Generally, this work is helpful in understanding THz channel propagation mechanisms and in simulating THz channels.

Front Inform Technol Electron Eng



Zhaowei CHANG received the B.S. degree in Electronic Information Engineering from Beijing University of Posts and Telecommunications, China, in 2020. Since then, he is studying for a master’s degree in Beijing University of Posts and Telecommunications, Beijing, China. His current research interests include THz channel measurements and modeling.



Jianhua ZHANG received the B.S. degree from the North China University of Technology, in 1994 and the Ph.D. degree from Beijing University of Posts and Telecommunications (BUPT), Beijing, China, in 2003. She is currently a Professor with the Information and Engineering College, BUPT. She has authored and coauthored more than 70 journal papers and nearly 200 conference papers. She received China Communications Best Paper Award in 2016 and shared VTC 2015 spring, and JCN2009 Best Paper Awards. She continuously contributed to channel model standards from ITU-R M.2135 to 3GPP 36.873,900/901 and she was the Drafting Group (DG) Chairwoman of ITU-R IMT-2020 Channel Model. Her research interests include 5G and 6G transmission techniques, intelligent channel modeling, millimeter wave and THz channel modeling,
channel emulator, etc.

Front Inform Technol Electron Eng



Pan TANG received the B.S. degree in Electrical Information Engineering from the South China University of Technology, Guangzhou, China, in 2013 and the Ph.D. degree in Information and Communication Engineering from Beijing University of Posts and Telecommunications, Beijing, China, in 2019. In 2017, he was a Visiting Scholar with the University of Southern California. Now, he is a Post-Doctoral Researcher in the State Key Laboratory of Networking and Switching Technology, Beijing University of Posts and Telecommunications, China. His current research interests include millimeter-wave, THz, and visible light channel measurements and modelling.



Lei TIAN received the B.S. degree in Communication Engineering and the Ph.D. degree in Information and Communication Systems from Beijing University of Posts and Telecommunications (BUPT), Beijing, China, in 2009 and 2015, respectively. He is currently an associate professor at BUPT. His current research interests are wireless channel measurement, modeling, and simulation for B5G and 6G, including millimeter wave, terahertz, massive MIMO, satellite-to-ground, and more.



Li YU received the B.S. degree from Tianjin University in 2011, and the M.S. degree from Beijing University of Posts and Telecommunications, Beijing, China, in 2014, where he is currently pursuing the Ph.D. degree. His current research interests include channel modeling, channel prediction, 3D MIMO, machine learning, etc.

Front Inform Technol Electron Eng



Guangyi LIU received the Ph.D. degree from Beijing University of Posts and Telecommunications. He is currently a Fellow and 6G lead specialist, in China Mobile Research Institute, where he is in charge of the wireless technology research and development, including 5G and 6G.



Liang XIA received the B.S. degree in Electronic and Information Engineering in 2005 and the M.S. degree in Information and Communication Engineering in 2008 from Tsinghua University, Beijing, China. He was a researcher at LTE physical layer in Huawei from 2008 to 2014 and was a researcher at 5G physical layer in China Mobile from 2015 to 2019. His current research interests include millimeter-wave, THz, and visible light communication.

Front Inform Technol Electron Eng