

Research Article

<https://doi.org/10.1631/jzus.A2600298>

Hybrid integration of flexible temperature and humidity sensors with crosstalk decoupling for wearable physiological monitoring

Mengran LIU¹, Ziming LI¹, Yingying DAI², Chongjie JIANG², Junwen HUANG², Zhenghong LUO², Jinhui ZHANG², Wei ZHOU², Wendi GAO³✉, Tao LUO²✉

¹Hubei Key Laboratory of Modern Manufacturing Quality Engineering, School of Mechanical Engineering, Hubei University of Technology, Wuhan 430068, China

²School of Intelligent Manufacturing (Pen-Tung Sah Institute of Micro-Nano Science and Technology), Xiamen University, Xiamen 361102, China

³Department of Gastroenterology, Second Affiliated Hospital of Xi'an Jiaotong University; School of Instrument Science and Technology, the State Key Laboratory for Manufacturing Systems Engineering, the State Industry-Education Integration Center for Medical Innovations, the International Joint Laboratory for Micro/Nano Manufacturing and Measurement Technologies, Xi'an Jiaotong University, Xi'an 710049, China

Abstract: Accurate, synchronous monitoring of respiratory and cutaneous temperature and humidity is essential for assessing pulmonary function and exercise-induced metabolic status. However, miniaturized flexible sensors often suffer from temperature-humidity crosstalk, which degrades measurement reliability. Here, we present a flexible temperature-humidity sensor that achieves crosstalk decoupling through hybrid integration of thermoelectric temperature sensing and capacitive humidity sensing, combined with algorithmic compensation. A three-dimensional interconnected copper-constantan thin-film thermocouple is fabricated on a polyimide substrate for temperature measurement. On the same substrate, a capacitive humidity sensor is constructed using laser-induced graphene interdigital electrodes and a graphene oxide sensing layer. Leveraging the intrinsic immunity between ionic and electronic conduction mechanisms, together with compensation algorithms, real-time decoupled sensing is achieved. The device exhibited an average humidity sensitivity of 31 pF/%RH and a temperature sensitivity of 29.88 $\mu\text{V}/^\circ\text{C}$, with fast response and recovery. A flexible printed circuit-based acquisition module with wireless transmission is further developed for wearable operation. Demonstrations in respiration monitoring and exercise metabolic assessment scenarios confirm the reliable capture of temperature-humidity dynamics, highlighting the potential of the proposed sensor for wearable healthcare applications.

Key words: flexible sensors; temperature-humidity monitoring; crosstalk decoupling; epidermal electronics; physiological monitoring

1 Introduction

Wearable physiological monitoring devices hold substantial promise for personalized health management and early disease prediction (Gao et al., 2016; Kim et al., 2019; Bandonkar et al., 2019). Synchronous monitoring of respiratory and cutaneous microenvironmental temperature and humidity provides critical physiological insights (Yin et al., 2024; Zhou

et al., 2024; Baker et al., 2020). Minute fluctuations in respiratory temperature provide useful information for respiratory monitoring, while epidermal temperature-humidity dynamics reflect thermoregulatory capacity and metabolic status (Yin et al., 2024; Nyein et al., 2021). Concurrent assessment of respiratory patterns and cutaneous thermal-humoral variations therefore enables effective discrimination of exercise states and early detection of disease risk (Yin et al., 2024; Zhou et al., 2024; Baker et al., 2020). Beyond multimodal signal acquisition, learning-based approaches have also been introduced into soft wearable systems to suppress signal artifacts, extract complex physiological information, and improve user-independent adaptation, further highlighting the importance of reliable multimodal sensing as the basis for intelligent physiological monitoring (Kim et

✉ Tao LUO, luotao@xmu.edu.cn

Wendi GAO, wendi_gao@mail.xjtu.edu.cn

 Tao LUO, <https://orcid.org/0000-0002-4861-3397>

Wendi GAO, <https://orcid.org/0000-0001-5243-6007>

Received May 7, 2026; Revision accepted Sept. 11, 2026;
Crosschecked

al., 2020; Kim et al., 2023; Kim et al., 2026; Park et al., 2026).

Contemporary flexible humidity sensors mainly rely on piezoresistive, capacitive, and triboelectric transduction mechanisms (Kuzubasoglu, 2022). Among them, capacitive sensors offer superior linearity, high sensitivity, and low power consumption, making them particularly suitable for continuous respiratory monitoring (Yin et al., 2024). In recent years, laser-induced graphene (LIG) technology has emerged as a cost-effective and patternable approach for constructing flexible capacitive sensors (Zhu et al., 2020; Fei et al., 2023; Lan et al., 2020). Its direct laser patterning ability and tunable porous structure have enabled diverse device configurations, including mechanically robust freestanding electrodes, biodegradable sensing platforms, and flexible sensing and energy devices (Le et al., 2022; Jung et al., 2022; Choi et al., 2026; Choi and Ko, 2026). Porous LIG electrodes can be directly fabricated on polyimide (PI) substrates by laser scribing, and integration with graphene oxide (GO) sensing layers enables high-sensitivity humidity detection, with sensitivities reaching several thousand pF/%RH (Zhu et al., 2020; Fei et al., 2023; Lan et al., 2020). This response originates from dielectric constant modulation caused by water intercalation within GO layers and from changes in ionic conductivity due to proton hopping mediated by hydrophilic functional groups (Bi et al., 2013; Ghosh et al., 2015). However, the humidity response of GO is intrinsically coupled with temperature (Wu et al., 2019). Elevated temperatures accelerate proton mobility and disturb adsorption equilibrium, producing thermal drift in humidity signals (Wu et al., 2019). Conversely, humidity variations also interfere with conventional flexible resistive temperature sensors, especially those sensors using carbon-based nanomaterials as temperature-sensitive materials (Rohilla et al., 2025). These devices rely on interfacial charge transport and are highly sensitive to water adsorption, electrochemical effects, and substrate swelling, resulting in severe signal coupling that degrades the accuracy of temperature measurements under humidity fluctuating environments.

Strategies for mitigating crosstalk in soft multimodal sensors span multiple levels, including sensing-element-level interference suppression, structural or array-level isolation, spatiotemporal

separation, and algorithm- or data-driven signal compensation (Yuan et al., 2026; Wu et al., 2026; Mu et al., 2024). Spatial isolation can partially reduce interference. For example, tri-modal sensing of temperature, humidity, and pressure based on three-dimensional vertical lamination has achieved cross-sensitivity below 0.6% (Mu et al., 2024). However, such approaches may increase device thickness and compromise wearing comfort, while thermal-conduction-induced drift can persist during long-term operation (Wu et al., 2026). This limitation becomes particularly relevant for long-term wearable physiological monitoring, in which temperature and humidity fluctuate simultaneously (Shen et al., 2024). System-level developments have further incorporated local signal processing and highly integrated stretchable platforms to enhance multimodal information processing and autonomous operation (Liu et al., 2024; Ren et al., 2025). Algorithmic compensation can correct signal drift to some extent; however, bidirectional coupling between temperature and humidity often necessitates relatively complex compensation models with limited generalizability (Jia et al., 2025), posing a major challenge to high-precision multimodal sensing in miniaturized and highly integrated flexible devices. Therefore, reducing intrinsic coupling between sensing channels prior to algorithmic correction is particularly desirable, as it can simplify subsequent signal decoupling while preserving compact device integration for wearable physiological monitoring (Yang et al., 2022; Wu et al., 2026).

To address these challenges, this work proposes a hybrid integration strategy that combines thermoelectric temperature sensing and capacitive humidity sensing on a single PI substrate. Temperature sensing is based on the Seebeck effect of a copper-constantan thermocouple, in which a temperature difference between the hot and cold junctions generates a thermoelectric voltage. Humidity sensing relies on proton transport within the GO interlayers, where adsorbed water molecules form hydrogen-bonded networks that facilitate ionic conduction, leading to measurable variations in capacitance. Owing to these distinct transduction mechanisms, temperature variations influence the capacitance of the humidity sensor, whereas humidity exerts a negligible effect on the thermocouple output. This unidirectional and pre-

dictable crosstalk provides a favorable basis for accurate signal decoupling. Building on this hybrid sensing architecture, a simple second-order polynomial regression model is developed to compensate for the temperature-induced drift in the humidity response. Consequently, the integrated bimodal sensor enables accurate and effectively decoupled temperature and humidity measurements, achieving a temperature sensitivity of $29.88 \mu\text{V}/^\circ\text{C}$ and a humidity sensitivity of $31 \text{ pF}/\%\text{RH}$. Furthermore, when integrated with a custom-designed flexible printed circuit (FPC)-based signal readout and acquisition system with wireless data transmission, the platform demonstrates practical capabilities for wearable monitoring of respiration, coughing, and dorsal-hand sweating.

2 Materials and methods

2.1 Materials

The GO dispersion with an initial concentration of 5 mg/mL (Xianfeng Nano, China) was diluted with deionized water to a working concentration of 4.5 mg/mL . Customized FPC substrates (JLCPCB, China) consisting of $110 \mu\text{m}$ thick copper-clad films were used for the fabrication of the integrated flexible sensor. A constantan target with a purity of 99.99% (Nanjing Mingchang New Materials, China) was used for deposition of the negative thermocouple electrodes. All aqueous solutions were prepared using deionized water.

2.2 Fabrication of the flexible sensor

As shown in Fig. S1, LIG interdigital electrodes (IDEs) were initially fabricated on the FPC substrate using a 355 nm UV laser (SINO-GALVO WE-UV-10W, China) with a focal length of 22.5 cm , pulse width of $10 \mu\text{s}$, scanning speed of 15 mm/s , and frequency of 24 kHz . The resulting IDEs comprised nine finger pairs, each with a finger length of 1.5 mm , finger width of approximately $200 \mu\text{m}$, and inter-finger spacing of approximately $150 \mu\text{m}$. Subsequently, oxygen plasma treatment was applied to the exposed IDE region to enhance hydrophilicity and remove contaminants. A $5 \mu\text{L}$ GO dispersion with a concentration of 4.5 mg/mL was drop-cast onto the IDEs and annealed at 60°C for 30 min . For the thermocouple junction, a 400 nm thick constantan

film was deposited on the opposite side of the FPC substrate by magnetron sputtering and electrically connected to copper vias, forming three-dimensional (3D) interconnected copper-constantan thermocouple junctions. Finally, the constantan layer was encapsulated with insulating ink, while the LIG IDEs remained exposed for humidity sensing.

2.3 Material characterization and sensor test

The microstructural morphologies of the LIG IDEs and the GO thin film were characterized by scanning electron microscopy (Zeiss Sigma 360, Germany). Raman spectroscopy (Zhongyan Huanke DEEP-INRS-II, China) was employed to investigate the molecular structure of these materials. X-ray photoelectron spectroscopy (Thermo Scientific K-Alpha, USA) was used to analyze the surface elemental composition and chemical states.

The temperature-sensing characteristics were measured in a temperature-controlled water bath, and the transient response was evaluated using instantaneous laser irradiation-induced heating. Humidity-sensing performance was assessed in a homemade temperature-humidity chamber (see Fig. S2). Two air pumps directed gas flows through desiccant and humidifier bottles, respectively, and the combined stream entered a mixing chamber. The chamber temperature was regulated using flexible PI heating films, while a commercial reference temperature-humidity sensor was placed adjacent to the proposed flexible sensor to enable accurate calibration and performance.

2.4 Design of the FPC-based sensor readout and acquisition system

To enable real-time signal acquisition of the sensor, a portable FPC-based monitoring system was developed. The core of the system consists of an AD5941 impedance analysis chip, an HX711 voltage acquisition chip, and an ESP32 Bluetooth microcontroller. AD5941 generates a high-frequency AC excitation to measure the complex capacitance between LIG interdigital electrodes for humidity sensing. The HX711 24-bit ADC acquires the thermocouple voltage, while AD5941 additionally monitors a cold-junction PT1000 resistor for cold-end compensation of the thermocouple. A high-speed multiplexing scheme enables quasi-synchronous acquisition of

temperature and humidity signals. A decoupling compensation algorithm is embedded in the ESP32 firmware, dynamically correcting humidity capacitance measurements using real-time temperature values obtained by the thermocouple. The processed data are wirelessly transmitted via Bluetooth. The circuit is powered by a rechargeable lithium-ion battery with a capacity of 1100 mAh and a nominal voltage of 3.7 V.

3 Results and discussion

3.1 Design of the integrated bi-modal flexible temperature and humidity sensor system

To suppress crosstalk between temperature and humidity signals, an integrated flexible temperature-humidity sensor based on a vertically stacked heterogeneous architecture was developed, together with a data acquisition FPC (Fig. 1a). The sensor conformably attaches to the dorsal hand for physiological monitoring, while the flexible printed circuit is secured around the wrist, ensuring system compactness and wearing comfort. The integrated bimodal sensor adopts a five-layer vertical stacking structure (Fig. 1b). The top layer is a patterned solder mask that exposes only the humidity-sensitive region. The second layer consists of a GO humidity-sensitive film deposited on LIG IDEs.

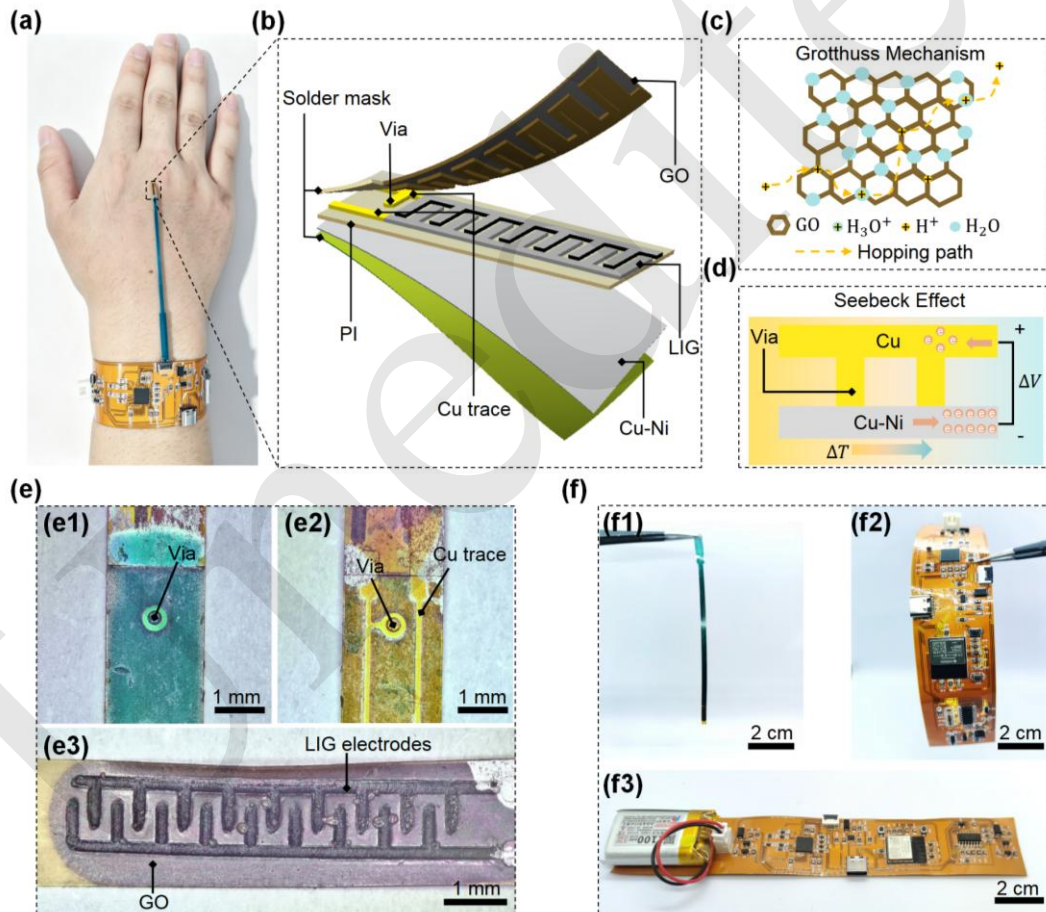


Fig. 1 Structure and sensing mechanisms of the integrated flexible sensor. (a) Photograph of the integrated bi-modal flexible sensor attached to the dorsal hand, with the FPC-based data acquisition system worn on the wrist. (b) Schematic of the five-layer vertically stacked architecture of the flexible sensor. (c) Temperature-sensing principle based on the Seebeck effect of a copper-constantan thermocouple. (d) Humidity-sensing principle based on the Grotthuss proton-hopping mechanism in GO. (e1-e3) Optical micrographs showing the T-type thermocouple junction, LIG interdigital electrodes, and GO-coated surface morphology. (f1-f3) Photographs demonstrating device flexibility and integration with the FPCB acquisition platform

The third layer comprises the LIG interdigital electrodes and copper interconnects, where copper traces are electrically connected to the constantan layer through vias. The fourth layer is the PI substrate, which serves as the supporting and isolation layer. The fifth layer is the constantan film, where copper-constantan thermocouple junctions are formed, and the bottommost layer is a full-coverage solder mask providing electrical insulation and mechanical protection.

The transduction mechanism of bimodal sensing relies on fundamentally different ionic and electronic conduction processes. The temperature-sensing unit is based on the Seebeck effect in copper-constantan thin-film thermocouples (Fig. 1c), whereas the humidity-sensing unit operates through Grotthuss proton hopping within GO interlayers (Fig. 1d). This hybrid integration intrinsically suppresses crosstalk at the mechanism level. The thermocouple junction adopts a three-dimensional interconnected structure (Figs. 1e1 and 1e2). As shown in Fig. 1e3, the LIG IDEs feature a nine-pair finger configuration and are uniformly coated with the GO film. Both the data acquisition FPC and the bimodal sensor exhibit excellent mechanical flexibility for wearable applications, as demonstrated in Fig. 1f.

3.2 Characterizations of the sensor materials

To elucidate the capacitive response mechanism of the humidity sensor at the microscopic level, comprehensive characterizations of the humidity-sensing materials were performed. Cross-sectional optical micrographs (Fig. 2a) confirm that, in this vertical heterostructure, multiple LIG layers are induced in an expanded state, forming 3D electrodes to substantially increase the effective capacitive response area. The GO film maintains intimate contact with the LIG without discernible gaps, ensuring signal stability. As shown in Fig. 2b, the UV laser-scribed LIG electrodes exhibit a three-dimensional porous structure, which provides abundant 3D transport channels for water-molecule adsorption. In contrast, the GO film exhibits a relatively smooth morphology with numerous interlayer voids, facilitating water infiltration.

Raman spectroscopy further elucidates the crystallographic characteristics of the materials (Fig. 2c). Both LIG and GO exhibit prominent D and G

peaks at approximately 1350 and 1580 cm^{-1} , respectively. LIG additionally shows a distinct 2D peak at $\sim 2700 \text{ cm}^{-1}$ ($I_{2D}/I_G \approx 0.27$), characteristic of graphitic structures, whereas GO presents an attenuated 2D band ($I_{2D}/I_G \approx 0.14$), consistent with its oxidized structure. The LIG/GO composite exhibits a ratio of 0.26, close to that of LIG. High-resolution C 1s deconvolution from X-ray photoelectron spectroscopy of GO (Fig. 2d) reveals substantial amounts of hydrophilic functional groups, including C-O(H), C=O, and COOH.

3.3 Sensor performance tests

As shown in Fig. 3a, the thermocouple-based temperature sensor was tested over a temperature difference ranging from 0 to 27 $^{\circ}\text{C}$. Linear fitting yields a correlation coefficient of $R^2 = 0.997$, with a sensitivity of approximately 29.88 $\mu\text{V}/^{\circ}\text{C}$. To investigate the sample-to-sample variation of the temperature sensor, three sensors from the same batch were tested under identical conditions, and the inter-sensor variation in sensitivity was evaluated based on their calibration results (Fig. 3b). The temperature sensitivity was determined to be $30.71 \pm 0.66 \mu\text{V}/^{\circ}\text{C}$, with the error bars representing the standard deviation (SD). The hot junction was rapidly heated by pulsed laser irradiation to evaluate the response and recovery times of the temperature sensor, showing a response time of approximately 5.38 s and a recovery time of approximately 5.39 s, as presented in Fig. 3c. To assess the stability of the temperature sensor under cyclic heating, laser irradiation with 2.5 s switching intervals was applied (Fig. 3d), and the device exhibited highly consistent output under repeated cyclic laser heating. To evaluate its mechanical robustness, we tested the sensing performance under five bending radii of 10, 15, 20, 25, and 30 mm. Compared with the unbent baseline, the thermoelectric voltage changes of the sensor under a temperature variation of 10 $^{\circ}\text{C}$ remained stable at approximately 0.31 mV across the different bending conditions. This value is only slightly lower than the response of 0.32 mV measured in the unbent state, corresponding to a relative error of approximately 3.1%, as shown in Fig. 3e. To evaluate the long-term stability of the sensor, the temperature responses were continuously monitored over a period of seven days. As shown in Fig. 3f, the temperature output

remained stable throughout the entire testing period, with mean responses of 0.169 ± 0.016 , 0.432 ± 0.005 ,

0.800 ± 0.005 , and 1.168 ± 0.010 mV at temperature differences (ΔT) of 2, 10, 20, and 28 °C, respectively.

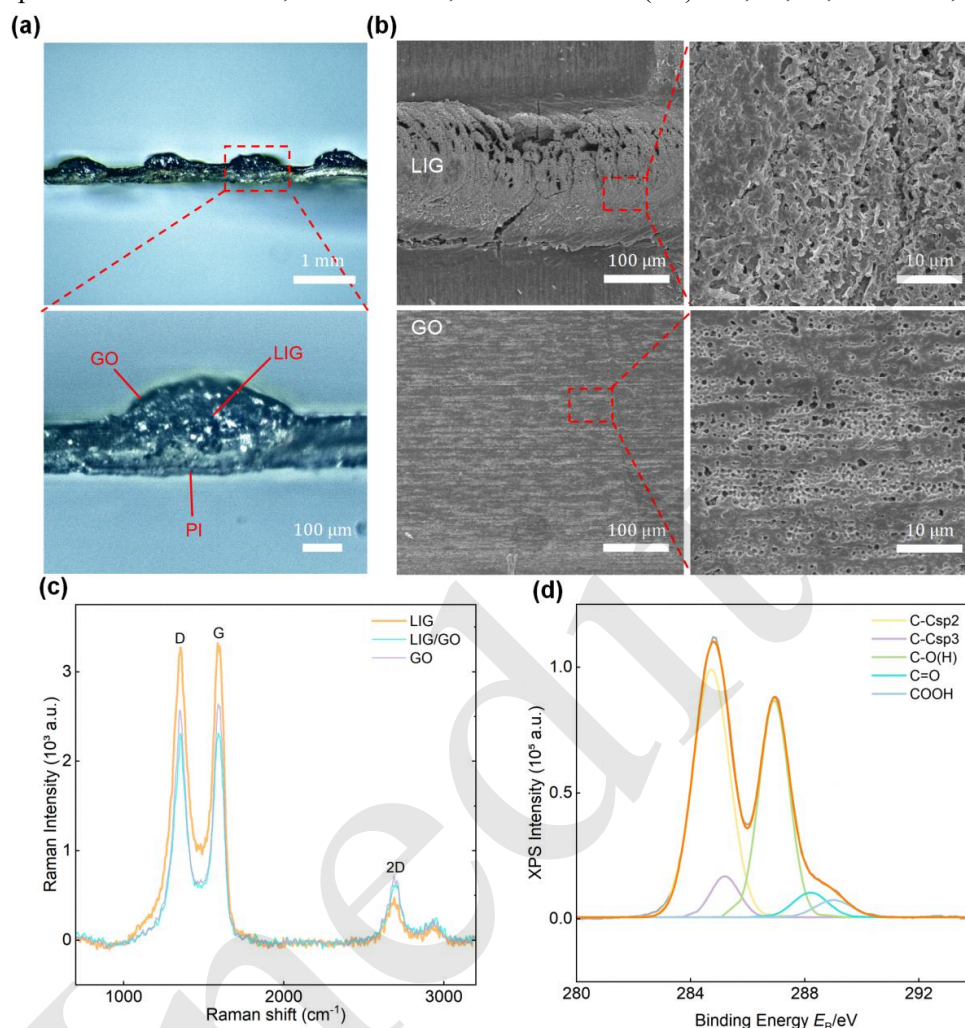


Fig. 2 Microstructural and compositional characterization of the sensing materials. (a) Cross-sectional optical micrograph showing intimate contact between LIG IDEs and GO film. (b) SEM images of the LIG IDE and GO film surfaces. (c) Raman spectra of LIG, GO, and LIG/GO composite materials. (d) High-resolution C 1s XPS spectrum of the GO film

Performance characterization of the LIG/GO-based flexible humidity sensor was conducted in sealed environments with varying humidity levels. The sensitivity of the humidity sensor depends on multiple parameters. First, the influence of different GO concentrations on the sensitivity and dynamic response of the sensor was evaluated at a fixed frequency of 1 kHz, as shown in Fig. 3g. Subsequently, at the optimized GO concentration of 4.5 mg/mL, the sensor's response characteristics were investigated at different test frequencies (Fig. 3h). The experimental results demonstrate that, with a GO concentration of 4.5 mg/mL and an operating frequency of 1 kHz, the sensor exhibits optimal overall

performance in terms of sensitivity and linearity, achieving a sensitivity of 31 pF/%RH. To evaluate the sample-to-sample variation of the humidity sensor, three sensors from the same batch were tested under identical conditions (Fig. 3i). The humidity sensitivity was determined to be 31.00 ± 2.73 pF/%RH, with the error bars representing the standard deviation (SD). The coefficient of variation of the humidity sensitivity was approximately 8.8%, compared with approximately 2.1% for the temperature sensitivity, indicating relatively larger sample-to-sample variation in the humidity channel. For the temperature sensors, some sample-to-sample variation was also observed in the absolute thermo-

electric output of the temperature sensors at low temperature differences. For example, at a temperature difference of 2 °C, the voltage outputs of the three sensors were 76.1, 73.98, and 97.63 μV , respectively. In contrast, a larger sample-to-sample variation was observed in the absolute baseline capacitance of the humidity sensors. At 20% RH, for example, the capacitances of the three sensors were 22.9, 7.8, and 8.1 pF, respectively. The measured absolute capacitance contains contributions from both the sensing element and parasitic capacitance associated with the external electrical connections and measurement configuration. Variations in these parasitic contributions may introduce offsets in the absolute capacitance, whereas the humidity sensitivity is determined from the capacitance change with RH under a fixed measurement configuration. Consequently, the humidity sensitivity exhibited substantially smaller sample-to-sample variation than the absolute baseline capacitance. The hysteresis of the optimized humidity sensor was also evaluated. As shown in Fig. 3j, during 20-90% RH humidity cycling, the maximum hysteresis is 4.7% RH, indicating low humidity hysteresis. The humidity sensor also demonstrates good consistency over six consecutive response cycles in the high-humidity regime (>60% RH), as shown in Fig. 3k. In the low-humidity regime (<40% RH), relatively larger fluctuations are observed because the reduced capacitive baseline results in a lower signal-to-noise ratio and greater susceptibility to noise. The baseline drift and cycle-to-cycle variation may also arise from incomplete desorption of residual interlayer water, slow

re-equilibration of hydrophilic functional groups, and slight charge trapping. In addition, the maximum hysteresis of 4.7% RH over the 20-90% RH range is primarily attributed to the asymmetric intercalation and de-intercalation of water molecules within the GO interlayers. Fig. 3l displays the dynamic response from 58.2% RH to 90% RH, with a response time of approximately 39.83 s and a recovery time of approximately 17.85 s. It should also be noted that the response/recovery time (39.83/17.85 s) and maximum hysteresis (4.7% RH) reported in Figs. 3l and 3j were obtained using a representative sensor. The reported R^2 values were calculated from calibration data obtained at distinct temperature or relative-humidity levels, rather than from repeated measurements at a single condition. For humidity sensing, at a temperature of 23.4 °C and a relative humidity of 67.6%, the sensor capacitance exhibited a maximum variation of ± 5.43 pF under bending, corresponding to approximately 3.3% of the baseline capacitance of 162.89 pF, as shown in Fig. 3m. These results demonstrate that both the temperature and humidity sensing functions remain stable under moderate bending deformation, confirming the suitability of the sensor for conformal wearable applications. To evaluate the long-term stability of the humidity sensor. Its capacitive response was monitored over a period of seven days. As shown in Fig. 3n, the humidity sensor exhibited stable responses over the seven-day period, with mean capacitance values of 44.43 ± 1.72 pF at 33% RH, 69.57 ± 5.57 pF at 40% RH, 441.66 ± 30.52 pF at 62% RH, and 1915.75 ± 89.08 pF at 80% RH.

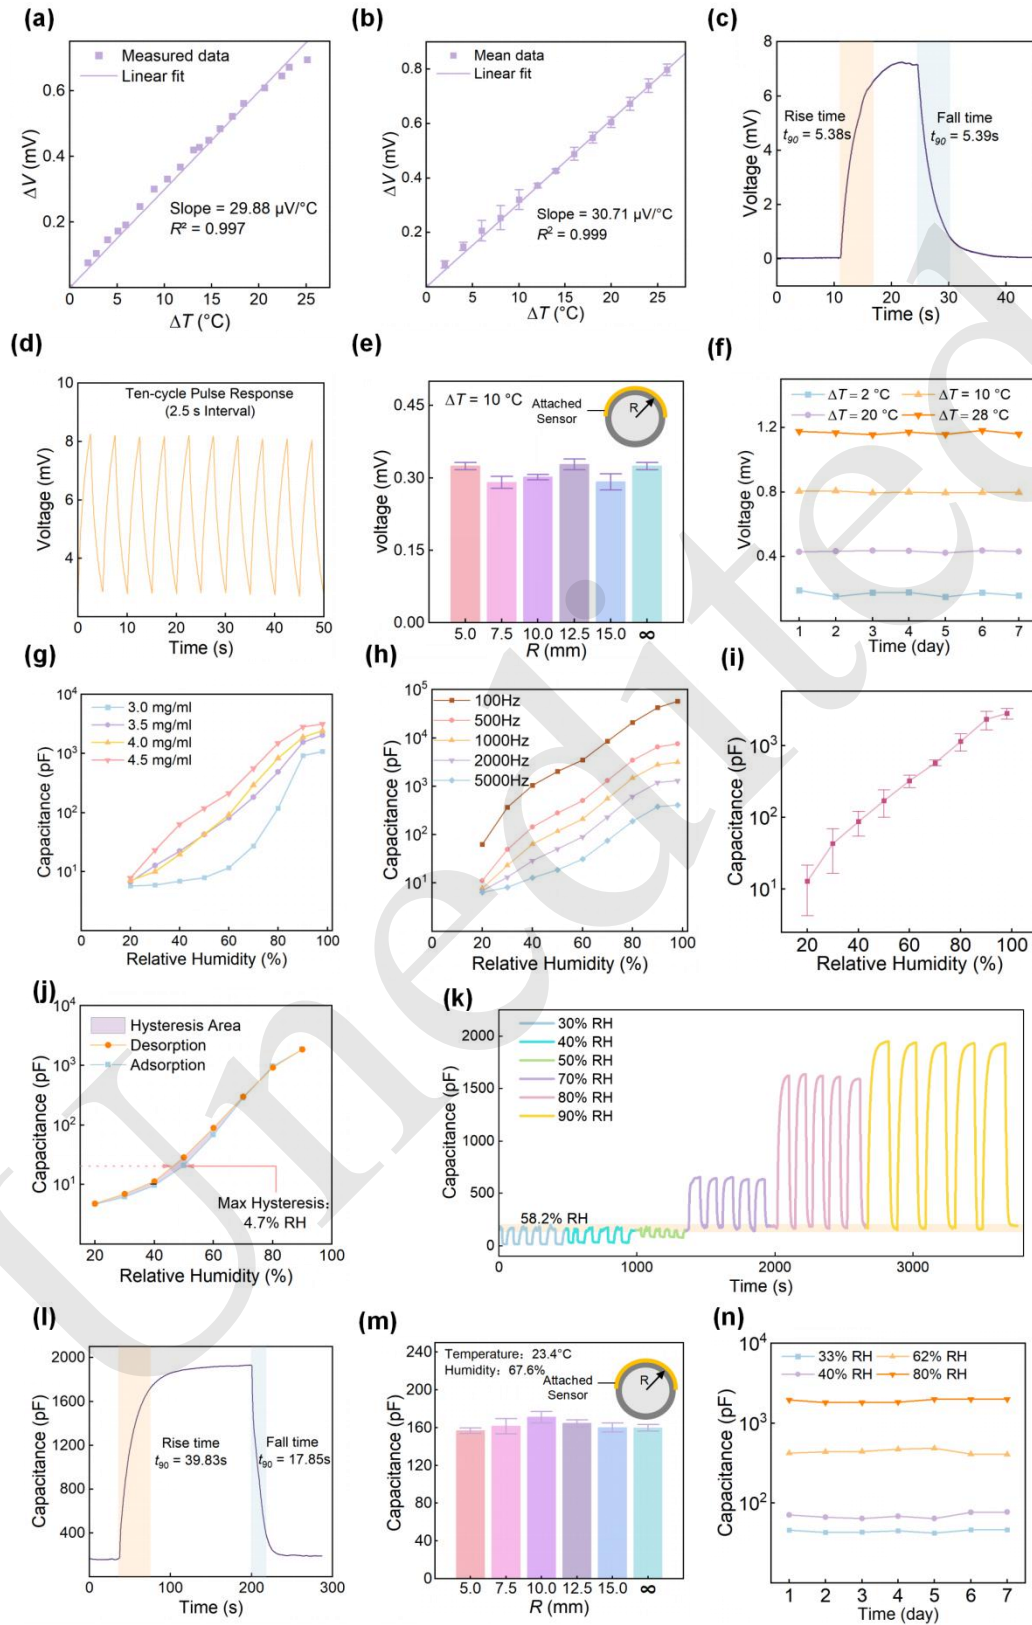


Fig. 3 Performance evaluation of the temperature and humidity sensing units. (a) Calibration curve and linear fit of the thermoelectric voltage (ΔV) versus temperature difference (ΔT) for a representative copper-constantan thermocouple. (b) Sample-to-sample reproducibility of the temperature sensor, showing the mean thermoelectric response and standard

deviation obtained from three independently fabricated sensors ($n = 3$). (c) Transient response and recovery characteristics of the temperature sensor under pulsed laser heating. (d) Cyclic response of the temperature sensor under ten consecutive laser-heating cycles with a 2.5 s interval. (e) Thermoelectric voltage stability of the temperature sensor under different bending radii at $\Delta T = 10\text{ }^{\circ}\text{C}$. (f) Long-term voltage-response stability of the temperature sensor over a 7-day period under different temperature differences. (g) Capacitive response of the humidity sensor prepared with different GO concentrations at 1 kHz. (h) Capacitive response of the humidity sensor at different operating frequencies using the optimized GO concentration of 4.5 mg/mL. (i) Sample-to-sample reproducibility of the capacitance response to relative humidity obtained from three independently fabricated humidity sensors ($n = 3$). (j) Adsorption-desorption hysteresis of the humidity sensor over 20%-90% RH. (k) Capacitance response of the humidity sensor during repeated multilevel relative-humidity cycling. (l) Dynamic response and recovery of the humidity sensor to a step change from 58.2% RH to 90% RH. (m) Capacitive output stability of the humidity sensor under different bending radii at 23.4 $^{\circ}\text{C}$ and 67.6% RH. (n) Long-term capacitive-response stability of the humidity sensor over a 7-day period at 33%, 40%, 62%, and 80% RH

3.4 Crosstalk decoupling of the integrated bi-modal flexible sensor

To achieve crosstalk decoupling in the integrated bi-modal flexible sensor, a strategy combining intrinsic crosstalk suppression and algorithmic compensation was employed. Intrinsic crosstalk suppression is realized by the hybrid integration of thermoelectric temperature sensing with capacitive humidity sensing. For algorithmic compensation, the temperature sensor was first calibrated under 30% RH and 100% RH environments (Fig. 4a). The results show that humidity exerts no significant influence on temperature calibration. The integrated bi-modal flexible sensor was then placed in an environment with a constant hot-to-cold temperature difference of 13 $^{\circ}\text{C}$, and the voltage of the thermocouple was recorded in 10% RH increments from 20% RH to 90% RH (Fig. 4b). No discernible drift was observed. The negligible susceptibility of the temperature channel to humidity can be attributed to two factors. First, the Seebeck transduction mechanism of the copper-constantan thermocouple dictates that the generated thermoelectric voltage is determined primarily by the temperature difference between the hot and cold junctions and the intrinsic thermoelectric properties of the metallic conductors, which are largely insensitive to water adsorption under the tested conditions. Second, the thermocouple layer is encapsulated with insulating ink, thereby limiting direct moisture exposure of the copper and constantan electrodes. Consequently, the negligible humidity-induced variation in the temperature signal observed in Figs. 4a-b indicates that crosstalk from the humidity channel to the temperature channel is intrinsically suppressed. Subsequently, the influence of temperature on humidity sensing was evaluated by

applying five temperature levels with 5 $^{\circ}\text{C}$ increments. The results reveal that temperature induces a noticeable, positively correlated drift in the capacitance of the humidity sensor (Fig. 4c), indicating a non-negligible unidirectional crosstalk effect of temperature on humidity sensing in the integrated flexible sensor. Fig. 4d presents the humidity response characteristics at multiple temperatures. Quantitatively, when the relative humidity was varied from 20% to 90% RH at a fixed hot-to-cold junction temperature difference of 13 $^{\circ}\text{C}$, the thermocouple output exhibited a maximum humidity-induced variation of 20.74 μV , corresponding to an equivalent temperature variation of approximately 0.69 $^{\circ}\text{C}$ (Fig. 4b). In contrast, when the temperature was increased from 30 to 50 $^{\circ}\text{C}$ at a fixed relative humidity of 90% RH, the capacitance of the humidity sensor changed by 373.24 pF, corresponding to an equivalent humidity error of approximately 3.5% RH (Figs. 4c-d). Therefore, prior to algorithmic compensation, the raw integrated sensor exhibits reduced and strongly asymmetric crosstalk rather than complete decoupling, because humidity-induced interference in the temperature channel is intrinsically suppressed, whereas residual temperature-induced interference remains in the humidity channel. To decouple this crosstalk, a polynomial regression-based compensation algorithm was introduced:

$$\ln C = \beta_0 + \beta_1 \cdot \varphi + \beta_2 \cdot T + \beta_3 \cdot \varphi^2 + \beta_4 \cdot \varphi \cdot T + \beta_5 \cdot T^2$$

where C denotes the measured capacitance, φ represents relative humidity (RH), T indicates temperature, and β_i are coefficients determined through least-squares fitting. The quadratic terms capture the nonlinear curvature observed in Fig. 4d, while the

cross-term accounts for the crosstalk effect, wherein temperature sensitivity varies with humidity level. The model achieves high fitting accuracy with $R^2 =$

0.994, and the detailed fitting coefficients and decoupling schematic diagrams are provided in Supplementary Table S1 and Fig. S3.

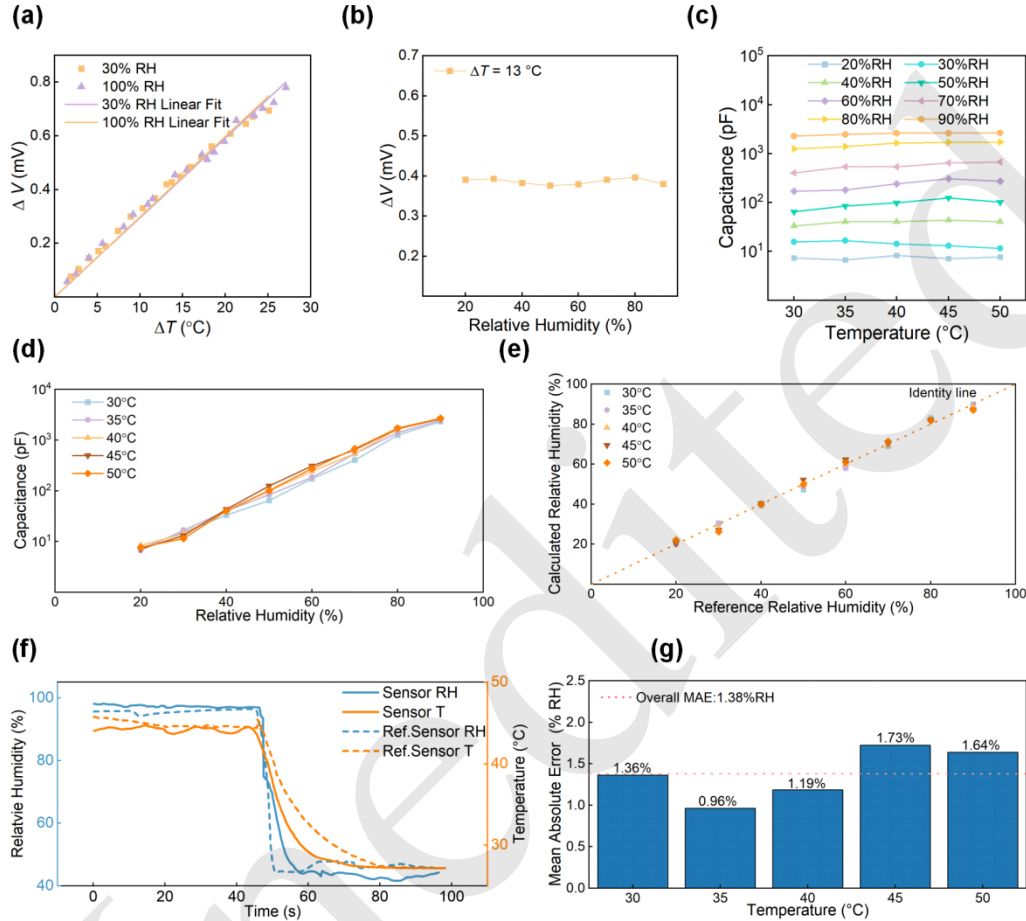


Fig. 4 Crosstalk evaluation and decoupling via a second-order polynomial model. (a) Calibration of the temperature sensor under environments with distinct relative humidity levels of 30% and 100%. (b) Response of the temperature sensor to a constant hot-to-cold junction temperature difference of 13 °C as the relative humidity increases from 20% to 90%. (c) Responses of the humidity sensor at specific relative humidity levels as the temperature increases from 30 °C to 50 °C. (d) Raw experimental dataset used to establish the second-order polynomial regression model. (e) Comparison between the compensated humidity measurement results and the ideal reference line. (f) Dynamic decoupling performance under a simultaneous wide-range temperature-humidity transition from 44.6 °C/98% RH to 27.2 °C/43% RH, compared with a commercial reference sensor. (g) Mean absolute errors of humidity measurements at different temperatures after algorithmic compensation

Fig. 4e illustrates the compensation results after crosstalk decoupling. Using the derived compensation formula, humidity values at various temperatures were calculated, and the compensated data closely aligned with the ideal reference line, validating the effectiveness of the decoupling algorithm. To further evaluate the decoupled sensing performance under simultaneous and wide-range temperature-humidity variations, a temperature-humidity

shock experiment was conducted by rapidly changing the environment from 44.6 °C/98% RH to 27.2 °C/43% RH, corresponding to concurrent changes of more than 17 °C and 50% RH. As shown in Fig. 4f, the recovered temperature and humidity signals closely tracked the environmental transition and stabilized at the new equilibrium values without evident residual crosstalk-induced distortion. At the equilibrium plateaus before and after the transition,

the recovered signals showed good agreement with those measured by a commercial reference sensor, with mean absolute errors of 1.85% RH for humidity and 0.32 °C for temperature. These results demonstrate that the proposed second-order compensation method remains effective under simultaneous, wide-range variations in both temperature and humidity. Fig. 4g presents the error statistics between the calibrated data and the reference humidity, demonstrating that the mean error at each temperature remains below 2% RH, with a global error of 1.38% RH. It should be noted that the second-order polynomial model was established using calibration data acquired over the ranges of 30-50 °C and 20-90% RH (Fig. 4c-d) and is primarily intended for wearable physiological and skin-microclimate monitoring under the indoor and exercise-related conditions investigated in this work. Although the simultaneous temperature-humidity step test demonstrates effective compensation during a limited excursion beyond the calibration domain (Fig. 4f), the model has not been systematically validated under arbitrary out-of-range conditions. Therefore, additional calibration and validation would be required before extending its use to substantially different environmental conditions.

3.5 Application demonstrations for wearable physiological monitoring

time intervals. The first type consisted of single coughs repeated five times with an interval of approximately 30 s. The second type comprised three consecutive coughs, with each group separated by an interval of approximately 20 s. As shown in Fig. 5d, a single cough event produces a distinct unimodal spike in both the temperature and humidity channels, whereas three consecutive coughs at intervals of approximately 0.5 s generate three corresponding sub-peaks. These results confirm that the system can accurately detect cough events and resolve the underlying physiological details. Quantitatively, the temperature-humidity integral area ratio (η) was introduced as a physiological descriptor. Single coughs exhibit an integral area ratio of 0.74 ± 0.16 , while three consecutive coughs show a ratio of 0.65 ± 0.10 . This scale invariance suggests that η is an intrinsic physiological parameter of alveolar exhalation, demonstrating significantly greater robustness

To evaluate the practical utility of the integrated bimodal flexible sensor system for wearable physiological monitoring, a flexible printed circuit (FPC)-based data acquisition platform was developed. The system consists of a flexible temperature-humidity bimodal sensor integrated with an ESP32-C3 low-power data acquisition module. The overall hardware architecture is shown in Fig. 5a. The acquisition module uses an RT9193 LDO regulator to provide a stable 3.3 V power supply. An AD5941 impedance measurement chip is used to acquire the capacitance signal from the humidity sensor. It also reads the PT1000 platinum resistance thermometer as the cold-junction compensation sensor for the thermocouple. An HX711 high-precision ADC is used to acquire the thermocouple voltage signal. A detailed circuit design can be found in Fig. S4. The raw signals are processed in real time using an embedded second-order polynomial regression algorithm for temperature-humidity crosstalk decoupling. Owing to its excellent mechanical flexibility, the system can be integrated onto the inner surface of commercial masks for respiratory monitoring (Figs. 5b-c). It can also be configured as a wrist-worn device with the sensor attached to the dorsal hand.

The cough detection capability of the system was first evaluated, as shown in Fig. 5d. Two types of cough events were deliberately generated in separate than conventional metrics based solely on the frequency and intensity of unimodal temperature or humidity signals. Even when unimodal waveforms merge into a single envelope due to high-frequency consecutive coughs, the bimodal sensor system can still accurately extract physiological information through cross-validation. Respiratory responses under different physiological states are presented in Fig. 5e. In the resting state, the temperature and humidity signals are highly synchronized (correlation coefficient > 0.95), exhibiting stable waveforms with a respiratory rate (RR) of approximately 10.6 bpm. During exercise, the RR increases to 22.1 bpm. Under this condition, the humidity channel exhibits signal clipping due to limitations in dynamic adsorption-desorption processes. In contrast, the fast response of the temperature channel compensates for this lag, with its rising slope approximately doubling relative to the resting state, thereby preventing mis-

interpretation as hypoventilation. It should be noted that the response time of 39.83 s, measured under a relatively large humidity step from 58.2% to 90% RH (Fig. 3l), represents the time required for the sensor to approach its steady-state response and should not be interpreted as the minimum temporal resolution for detecting respiratory events. During respiration, transient variations in local humidity can induce detectable capacitance changes well before complete adsorption equilibrium is established, thereby enabling the humidity channel to track periodic breathing cycles. The humidity signals in the physiological demonstrations were acquired directly without additional temporal filtering. At higher respiratory rates, however, the limited adsorption-desorption kinetics of the GO sensing layer may attenuate the signal amplitude and distort the waveform, although individual respiratory cycles remain distinguishable. Under such conditions, the humidity response is interpreted together with the faster temperature channel, allowing the two sensing modalities to provide complementary dynamic information for respiratory monitoring. During deep breathing, the waveforms display pronounced morphological heterogeneity. Specifically, the humidity signal shows a 1–2 s plateau, while the temperature signal exhibits a sharp, mountain-like peak, reflecting the physiological reduction in airflow rate toward the end of exhalation.

Finally, the sensor was mounted on the dorsal hand to monitor epidermal temperature and humidity during exercise, enabling capture of the full thermoregulatory process (Fig. 5f). At the onset of exercise (123 s), both skin temperature and humidity decreased slightly by approximately 0.5 °C and 1% RH, respectively, which is due to convective cooling. After 201 s of sustained activity (i.e., at 324 s), the increase in core body temperature triggered sweating, leading to a rapid rise in epidermal humidity accompanied by a decrease in temperature. Exercise ceased at 450 s, at which point the temperature had decreased by 1.2 °C (to 30.2 °C), while humidity had increased by 26% (to 83.3% RH) relative to baseline. Following a brief 10 s decline, humidity continued to increase for an additional 50 s due to a “delayed sweating” effect. During this period, epidermal

temperature exhibited a dynamic trend, initially increasing (from 29.9 °C to 30.9 °C) and subsequently decreasing (to 29.4 °C). This behavior reflects the dynamic competition between the cessation of convective cooling and the ongoing evaporative cooling of sweat. Eventually, as the sweat evaporated, both signals gradually returned to their baseline levels. To demonstrate a representative application that specifically benefits from decoupled temperature-humidity sensing, we added a textile-integrated skin-garment microclimate test, as shown in Fig. 6a. In this experiment, the bimodal sensor was attached to the skin beneath one to three layers of fabric, and the temperature and humidity at the skin-garment interface were simultaneously monitored. Three representative fabrics were investigated: 100% polyester, 100% cotton, and a 50/50 polyester-cotton blend. The results show that the interfacial relative humidity generally increased with the number of fabric layers and was also strongly affected by the fabric composition. Specifically, polyester produced the highest humidity levels of 55.2–63.0% RH (see Fig. 6b), followed by the polyester-cotton blend at 51.8–57.3% RH (see Fig. 6c), whereas cotton exhibited the lowest humidity levels of 49.7–55.1% RH (see Fig. 6d). Meanwhile, the interfacial temperature increased only slightly (see Fig. 6b–d). This behavior can be attributed to the combined effects of heat dissipation, perspiration, moisture absorption, and fabric breathability. As the number of fabric layers increases, heat and moisture dissipation to the surrounding environment becomes more restricted, leading to greater moisture accumulation at the skin-garment interface. In addition, compared with cotton, polyester has lower moisture absorbency and generally poorer moisture-management capability, resulting in greater humidity accumulation with increasing synthetic fiber content. These results highlight the importance of simultaneously resolving temperature and humidity. Without decoupled bimodal measurements, the observed microclimate variations could not be reliably distinguished between thermal accumulation and moisture-related effects associated with fabric hygroscopicity and breathability.

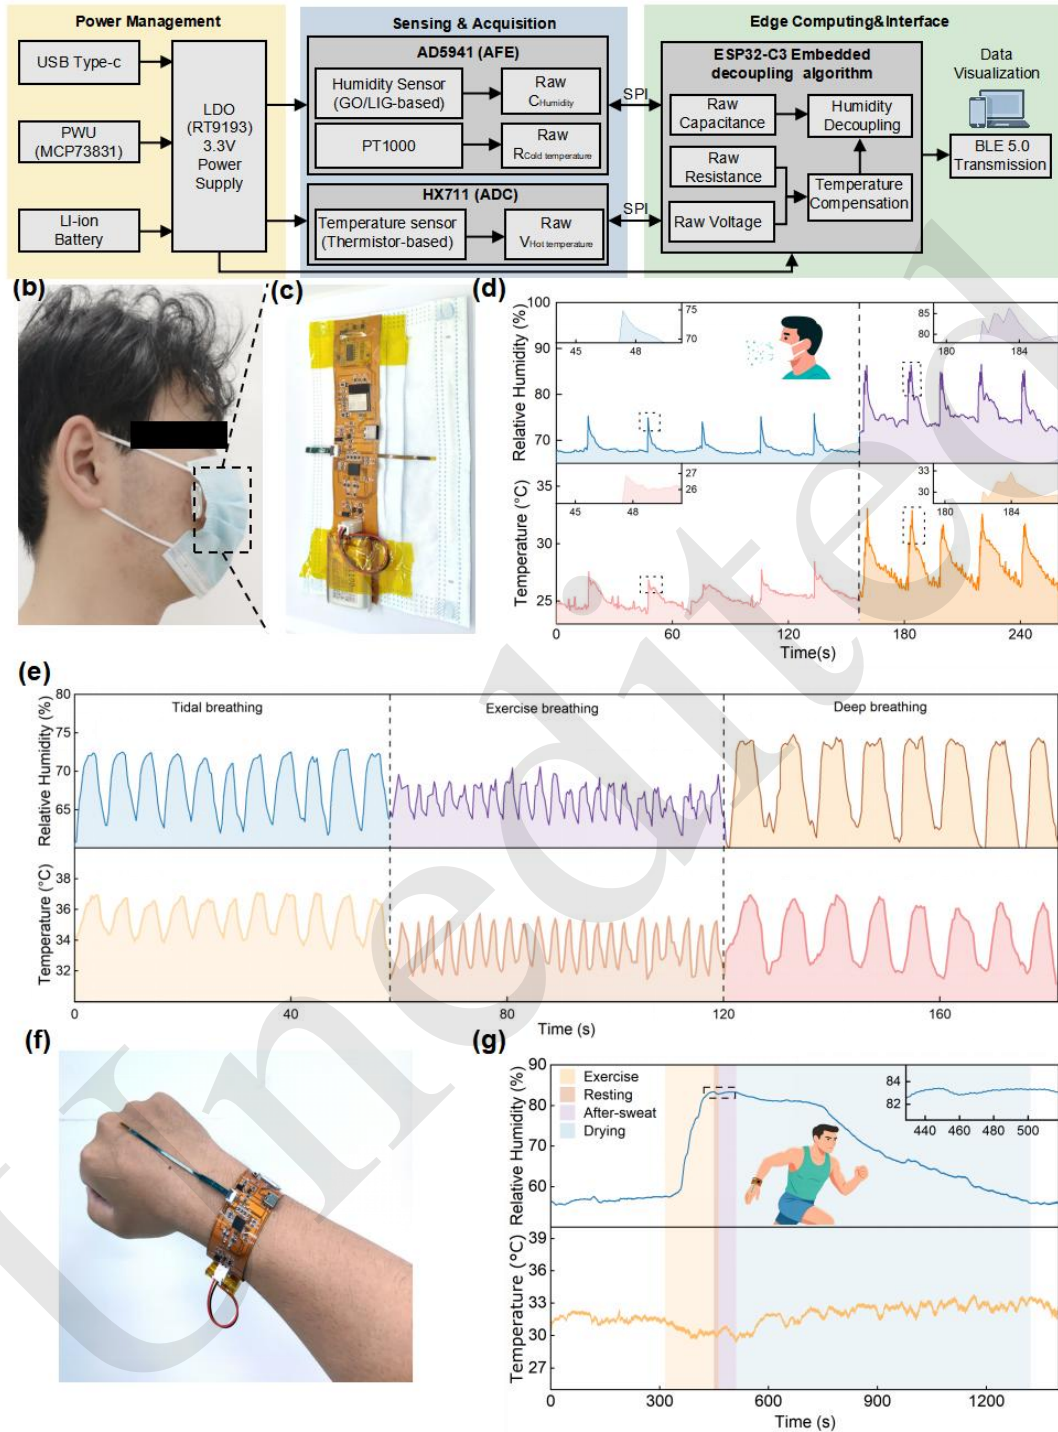


Fig. 5 Wearable physiological monitoring of respiration, coughing, and exercise. (a) Hardware architecture of the acquisition system based on an ESP32-C3 microcontroller. (b-c) Photographs of the sensor system attached to the inner surface of a commercial mask. (d) Response of the bimodal sensor to cough events. (e) Synchronized temperature-humidity waveforms during resting, exercise, and deep-breathing conditions. (f) Sensor system attached to the dorsal hand. (g) Dynamic evolution of skin temperature and humidity during exercise monitored by the sensor system

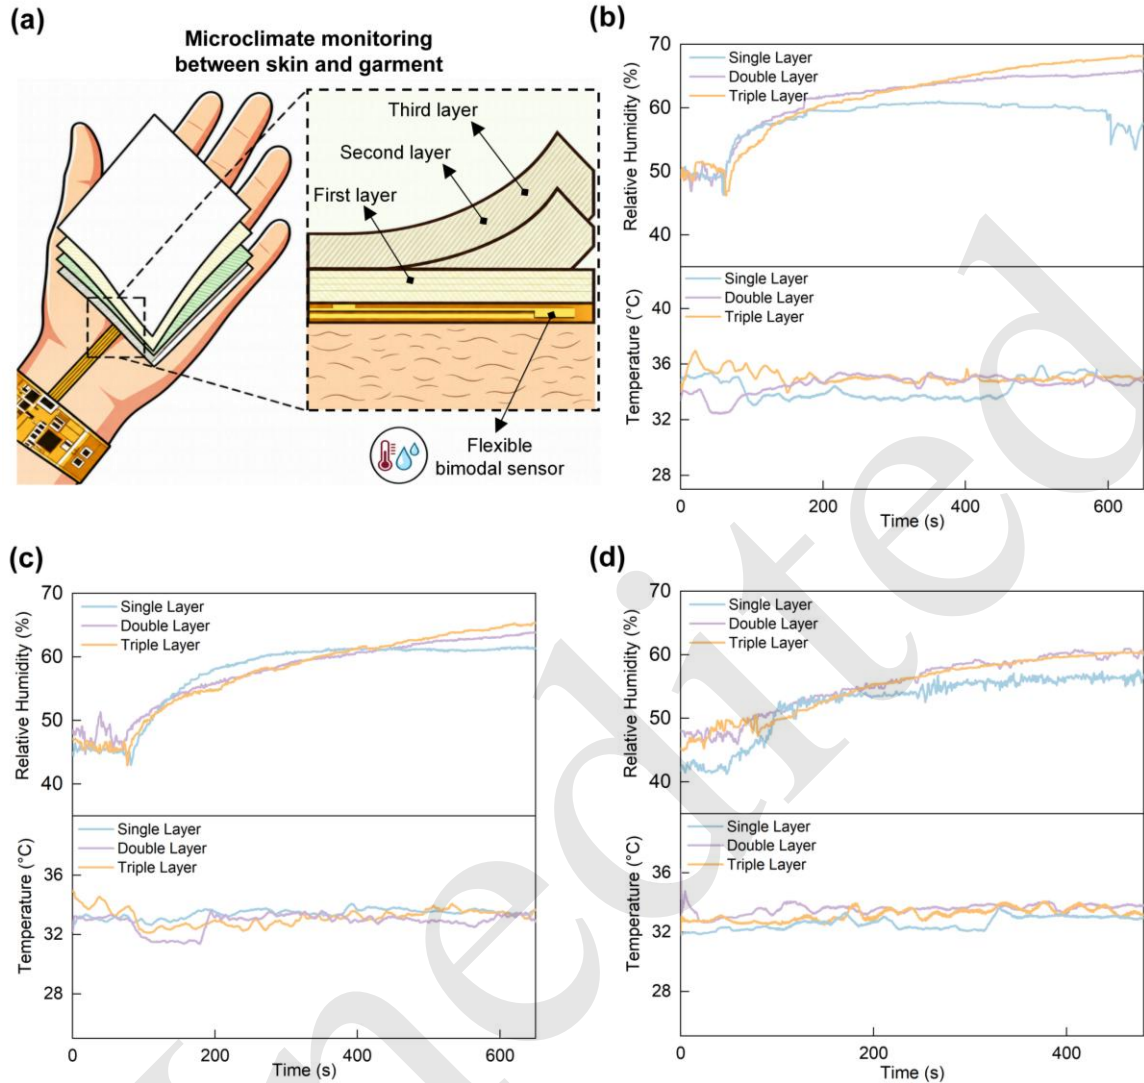


Fig. 6 (a) Schematic illustration of the skin-garment microclimate test configuration with varying fabric layers (single, double, and triple layers). (b-d) Simultaneous real-time measurements of relative humidity and temperature at the skin-garment interface for (b) 100% polyester, (c) a 50/50 polyester-cotton blend, and (d) 100% cotton fabrics

4 Conclusions

This study presents a flexible epidermal integrated temperature-humidity sensor that suppresses signal crosstalk through the synergistic combination of hybrid ionic-electronic conduction mechanisms and a second-order compensation algorithm. The proposed system effectively addresses the crosstalk issue in multimodal flexible devices during complex physiological monitoring. The heterogeneous integration of copper-constantan thin-film thermocouples allows independent temperature measurements. Meanwhile, ultraviolet

laser direct writing is employed to fabricate LIG interdigital electrodes in situ on flexible polyimide substrates. Combined with the abundant hydrophilic functional groups of GO, this design enables highly sensitive humidity sensing. Experimental results demonstrate that the integrated sensor achieves a humidity sensitivity of 31 pF/%RH and a temperature sensitivity of 29.88 $\mu\text{V}/^{\circ}\text{C}$, along with excellent stability under dynamic cyclic operation. A second-order polynomial calibration algorithm reduces humidity measurement error to within 2% RH. Integrated with a self-developed FPC-based sensor readout system, the platform is successfully applied to respiratory monitoring, cough detection,

and exercise-induced epidermal temperature-humidity tracking. This synergistic crosstalk suppression strategy offers a viable pathway for the development of multimodal integrated sensors, with broad potential in intelligent healthcare, exercise monitoring, and early detection of respiratory diseases.

Acknowledgments

This work was supported by the National Natural Science Foundation of China (No. 52575674, No. 52325507, No. U25A20311).

Author contributions

Mengran LIU and Tao LUO designed the research and contributed to the preparation and revision of the manuscript. Wendi GAO and Tao LUO supervised the research. Ziming LI performed the main experimental work and processed and analyzed the corresponding data. Yingying DAI, Chongjie JIANG, Junwen HUANG, Zhenghong LUO, Jinhui ZHANG, and Wei ZHOU assisted with the experimental work. All authors read and approved the final version of the manuscript.

Conflict of interest

Mengran LIU, Ziming LI, Yingying DAI, Chongjie JIANG, Junwen HUANG, Zhenghong LUO, Jinhui ZHANG, Wei ZHOU, Wendi GAO, and Tao LUO declare that they have no conflict of interest.

Declaration on the use of generative AI tools

During the preparation of this work, the authors used ChatGPT in order to improve the language and readability of the manuscript. After using this tool, the authors reviewed and edited the content as needed and take full responsibility for the content of the published article.

Data availability

The data that support the findings of this study are available from the corresponding author upon reasonable request.

References

- Baker LB, Model JB, Barnes KA, et al., 2020. Skin-interfaced microfluidic system with personalized sweating rate and sweat chloride analytics for sports science applications. *Science Advances*, 6(50):eabe3929. <https://doi.org/10.1126/sciadv.abe3929>
- Bandodkar AJ, Gutruf P, Choi J, et al., 2019. Battery-free, skin-interfaced microfluidic/electronic systems for simultaneous electrochemical, colorimetric, and volumetric analysis of sweat. *Science Advances*, 5(1):eaav3294. <https://doi.org/10.1126/sciadv.aav3294>
- Bi H, Yin K, Xie X, et al., 2013. Ultrahigh humidity sensitivity of graphene oxide. *Scientific Reports*, 3(1):2714. <https://doi.org/10.1038/srep02714>
- Choi G, Ko SH, 2026. Laser-induced graphene for micro- and nano-manufacturing: fundamentals, processing approaches, and emerging applications. *Micro & Nano Manufacturing*, 2(1):12. <https://doi.org/10.1007/s44374-026-00021-0>
- Choi G, Yoon S, Jung Y, et al., 2026. Robust freestanding laser-induced graphene electrodes for wearable energy devices. *Carbon*, 246:120852. <https://doi.org/10.1016/j.carbon.2025.120852>
- Fei X, Huang J, Shi W, 2023. Humidity sensor composed of laser-induced graphene electrode and graphene oxide for monitoring respiration and skin moisture. *Sensors*, 23(15):6784. <https://doi.org/10.3390/s23156784>
- Gao W, Emaminejad S, Nyein HYY, et al., 2016. Fully integrated wearable sensor arrays for multiplexed in situ perspiration analysis. *Nature*, 529(7587):509-514. <https://doi.org/10.1038/nature16521>
- Ghosh S, Ghosh R, Guha PK, et al., 2015. Humidity sensor based on high proton conductivity of graphene oxide. *IEEE Transactions on Nanotechnology*, 14(5):931-937. <https://doi.org/10.1109/tnano.2015.2465859>
- Jia Q, Ye W, Zhang C, et al., 2025. Wearable multimodal sensing system for synchronously health-environmental monitoring via hybrid neuroevolutionary signal decoupling. *Nano Letters*, 25(24):9726-9733. <https://doi.org/10.1021/acs.nanolett.5c01881>
- Jung Y, Min J, Choi J, et al., 2022. Smart paper electronics by laser-induced graphene for biodegradable real-time food spoilage monitoring. *Applied Materials Today*, 29:101589. <https://doi.org/10.1016/j.apmt.2022.101589>
- Kim J, Campbell AS, De Ávila BE-F, et al., 2019. Wearable biosensors for healthcare monitoring. *Nature Biotechnology*, 37(4):389-406. <https://doi.org/10.1038/s41587-019-0045-y>
- Kim KK, Ha I, Kim M, et al., 2020. A deep-learned skin sensor decoding the epicentral human motions. *Nature Communications*, 11(1):2149. <https://doi.org/10.1038/s41467-020-16040-y>
- Kim KK, Kim M, Pyun K, et al., 2022. A substrate-less nanomesh receptor with meta-learning for rapid hand task recognition. *Nature Electronics*, 6(1):64-75. <https://doi.org/10.1038/s41928-022-00888-7>
- Kim KK, Bang J, Kim M, et al., 2025. Unisensory processing of interleaving memristive nanowires enabling multimodal sensing at human-scale resolution. *Nature Materials*, 25(3):463-471. <https://doi.org/10.1038/s41563-025-02373-w>
- Arman Kuzubasoglu B, 2022. Recent studies on the humidity sensor: A mini review. *ACS Applied Electronic Materials*, 4(10):4797-4807. <https://doi.org/10.1021/acsaelm.2c00721>
- Lan L, Le X, Dong H, et al., 2020. One-step and large-scale fabrication of flexible and wearable humidity sensor

- based on laser-induced graphene for real-time tracking of plant transpiration at bio-interface. *Biosensors and Bioelectronics*, 165:112360.
<https://doi.org/10.1016/j.bios.2020.112360>
- Le TSD, Phan HP, Kwon S, et al., 2022. Recent advances in laser-induced graphene: Mechanism, fabrication, properties, and applications in flexible electronics. *Advanced Functional Materials*, 32(48):2205158.
<https://doi.org/10.1002/adfm.202205158>
- Liu D, Tian X, Bai J, et al., 2024. A wearable in-sensor computing platform based on stretchable organic electrochemical transistors. *Nature Electronics*, 7(12):1176-1185.
<https://doi.org/10.1038/s41928-024-01250-9>
- Mu Y, Cheng J, Shi W, et al., 2024. Crosstalk-free hybrid integrated multimodal sensor for human temperature, humidity, and pressure monitoring. *Cell Reports Physical Science*, 5(10):102223.
<https://doi.org/10.1016/j.xcrp.2024.102223>
- Nyein HYY, Bariya M, Tran B, et al., 2021. A wearable patch for continuous analysis of thermoregulatory sweat at rest. *Nature Communications*, 12(1):1823.
<https://doi.org/10.1038/s41467-021-22109-z>
- Park H, Choi G, Yoon S, et al., 2026. Convergence of soft electronics and artificial intelligence: From materials to intelligent systems. *Nano-Micro Letters*, 18(1):419.
<https://doi.org/10.1007/s40820-026-02265-x>
- Ren Z, Shi X, Yang Q, et al., 2025. An ultrastretchable seamlessly integrated contactless charging microsystem towards skin-attachable wireless microelectronics. *Nature Communications*, 16(1):1642.
<https://doi.org/10.1038/s41467-025-56881-z>
- Rohilla R, Prakash J, Dasgupta K, 2025. Review of carbon nanotube/graphene nanosheet chemiresistive gas sensors. *ACS Applied Nano Materials*, 8(49):23414-23465.
<https://doi.org/10.1021/acsanm.5c04068>
- Shen S, Zhou Q, Chen G, et al., 2024. Advances in wearable respiration sensors. *Materials Today*, 72:140-162.
<https://doi.org/10.1016/j.mattod.2023.12.003>
- Wu J, Wu Z, Ding H, et al., 2019. Multifunctional and high-sensitive sensor capable of detecting humidity, temperature, and flow stimuli using an integrated microheater. *ACS Applied Materials & Interfaces*, 11(46):43383-43392.
<https://doi.org/10.1021/acsami.9b16336>
- Wu T, Li YT, Zhao L, et al., 2026. Recent progress on flexible multimodal sensors: Decoupling strategies, fabrication and applications. *Advanced Materials*, 38(12):e21375.
<https://doi.org/10.1002/adma.202521375>
- Yang R, Zhang W, Tiwari N, et al., 2022. Multimodal sensors with decoupled sensing mechanisms. *Advanced Science*, 9(26):2202470.
<https://doi.org/10.1002/advs.202202470>
- Yin Z, Yang Y, Hu C, et al., 2024. Wearable respiratory sensors for health monitoring. *NPG Asia Materials*, 16(1)
<https://doi.org/10.1038/s41427-023-00513-9>
- Yuan Y, Zhang W, Yang JY, et al., 2026. Recent advances in decoupling strategies for soft sensors. *Advanced Science*, 13(17):e14499.
<https://doi.org/10.1002/advs.202514499>
- Zhou L, Guess M, Kim KR, et al., 2024. Skin-interfacing wearable biosensors for smart health monitoring of infants and neonates. *Communications Materials*, 5(1):72.
<https://doi.org/10.1038/s43246-024-00511-6>
- Zhu C, Tao L-Q, Wang Y, et al., 2020. Graphene oxide humidity sensor with laser-induced graphene porous electrodes. *Sensors and Actuators B: Chemical*, 325:128790.
<https://doi.org/10.1016/j.snb.2020.128790>

Electronic supplementary materials

Figs. S1–S4 and Tables S1–S2

中文概要

题目: 混合集成柔性温湿度传感器的串扰解耦与可穿戴生理监测应用

作者: 刘梦然¹, 李梓鸣¹, 戴莹莹², 江崇杰², 黄俊文², 罗钰弘², 张金忠², 周伟², 高文迪³, 罗涛²

机构: ¹ 湖北工业大学机械工程学院, 现代制造质量工程湖北省重点实验室, 中国武汉, 430068; ² 厦门大学, 智能制造学院(萨本栋微米纳米科学技术研究院), 中国厦门, 361102; ³ 西安交通大学第二附属医院消化内科, 西安交通大学仪器科学与技术学院, 精密微纳制造技术全国重点实验室, 国家医学攻关产教融合创新平台, 教育部微纳制造与测试技术国际合作联合实验室, 中国西安, 710049

目的: 高度集成的小型柔性温湿度传感器易受温湿度信号交叉串扰影响, 从而降低生理监测的准确性。本文旨在构建一种热电式温度传感器和电容式湿度传感器集成于同一柔性基底的温湿度双模态传感器, 通过异质传感机制降低了固有串扰, 并结合算法补偿实现温湿度信号的高精度解耦, 以实现其在可穿戴生理监测领域的应用。

创新点: 1. 提出热电-电容混合集成策略, 从传感机制层面抑制温湿度测量的双向串扰。2. 建立二阶多项式回归补偿模型, 实现温湿度信号的实时在线解耦。

方法: 1. 通过 FPC 工艺、激光诱导石墨烯和磁控溅射工艺相结合, 实现单一柔性 PI 基底上, 热电偶温度敏感单元与电容式湿度敏感单元的微型化混合集成; 2. 通过不同温度和湿度条件下的串扰特

性试验, 定量分析双参数信号串扰, 建立二阶多项式回归模型补偿温度引起的湿度信号漂移; 3. 构建了基于 AD5941、HX711 和 ESP32 的柔性采集系统, 实现温湿度信号采集、热电偶冷端补偿、串扰实时解耦和数据的蓝牙无线传输, 并开展了呼吸、咳嗽、运动过程中皮肤温湿度变化及不同织物覆盖条件下皮肤—织物微环境的监测实验。

结 论: 1. 热电式温度传感与 LIG/GO 电容式湿度传感的混合集成能够有效降低温湿度信号之间的固有串扰, 并形成以温度对湿度影响为主的非对称单向串扰特性, 有利于简化后续算法解耦复杂性, 提升解耦精度。2. 二阶多项式补偿模型能够有效校正温度引起的湿度漂移, 在温湿度同步变化条件下仍可获得较高的测量准确性, 实现温湿度双模信号的高精度解耦。3. 所构建的柔性温湿度传感系统可实现呼吸、咳嗽、运动出汗以及皮肤—织物微环境中的温湿度动态监测, 表明其在可穿戴健康监测、运动状态评估及多模态生理感知方面具有较好的应用潜力。

关键词: 柔性传感器; 温湿度监测; 串扰解耦; 表皮电子; 生理监测