

Zamshed Iqbal Chowdhury, Md. Istiaque Rahaman, M. Shamim Kaiser, 2017. Electrical analysis of single-walled carbon nanotube as gigahertz on-chip interconnects. *Frontiers of Information Technology & Electronic Engineering*, **18**(2):262-271. <http://dx.doi.org/10.1631/FITEE.1500349>

# Electrical analysis of single-walled carbon nanotube as gigahertz on-chip interconnects

**Key words:** Interconnect; Carbon nanotube; Current density; Propagation constant; Characteristic impedance; System-on-chip

Corresponding author: Zamshed Iqbal Chowdhury

E-mail: [zic@juniv.edu](mailto:zic@juniv.edu)

 ORCID: <http://orcid.org/0000-0002-4096-7000>

# Motivation

- Increasing logic and memory density in high-end SoCs and Microprocessors require high speed interconnects at lower dimensions.
- Performance of conventional Copper based interconnects degrades with decreasing dimension.
- Single walled CNT is a promising candidate for high speed interconnects.
- Analysis of single walled CNT emphasizing electrical properties is not concrete.

# Main idea


- Luttinger's model of CNT considers CNT as a collection of interacting electrons
- This gives rise to an equivalent electrical model for single walled CNT
- This model is used in analyzing different electrical properties with different physical parameters.

# Method

1. Four parameters are analyzed: nanotube impedance, attenuation and phase delay constants, current density, and signal delays.
2. The relation between physical parameters and signal frequency are derived through mathematical expressions.
3. These 4 parameters are observed while the physical parameters and frequency are being varied.


# Major results

- Characteristic impedance increases exponentially with frequency.

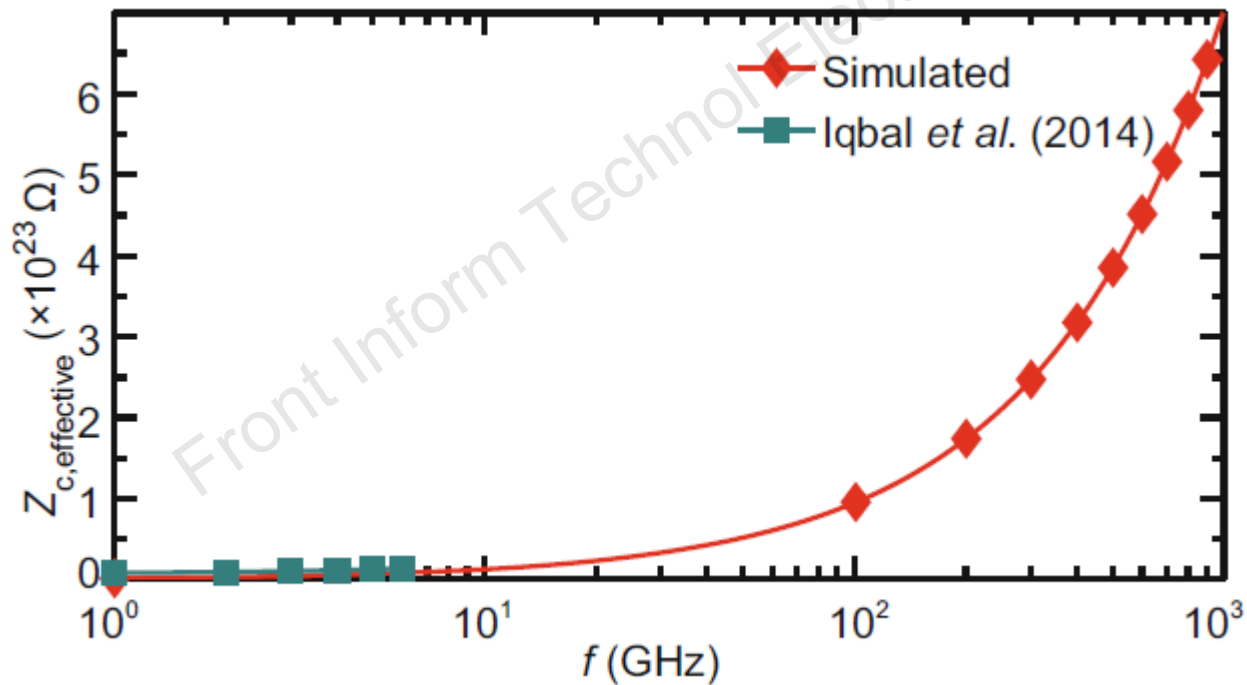


# Major results

- Increasing interaction between electrons decreases Nanotube impedance.

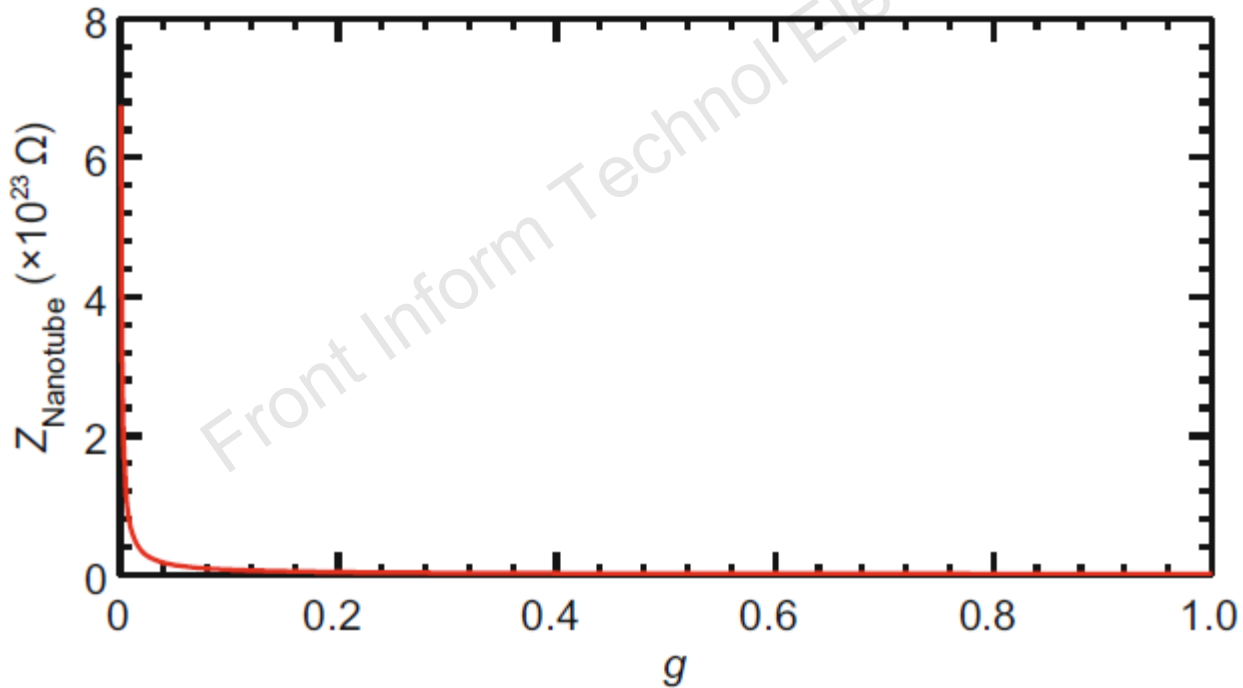


# Major results

- Attenuation constant increases with frequency

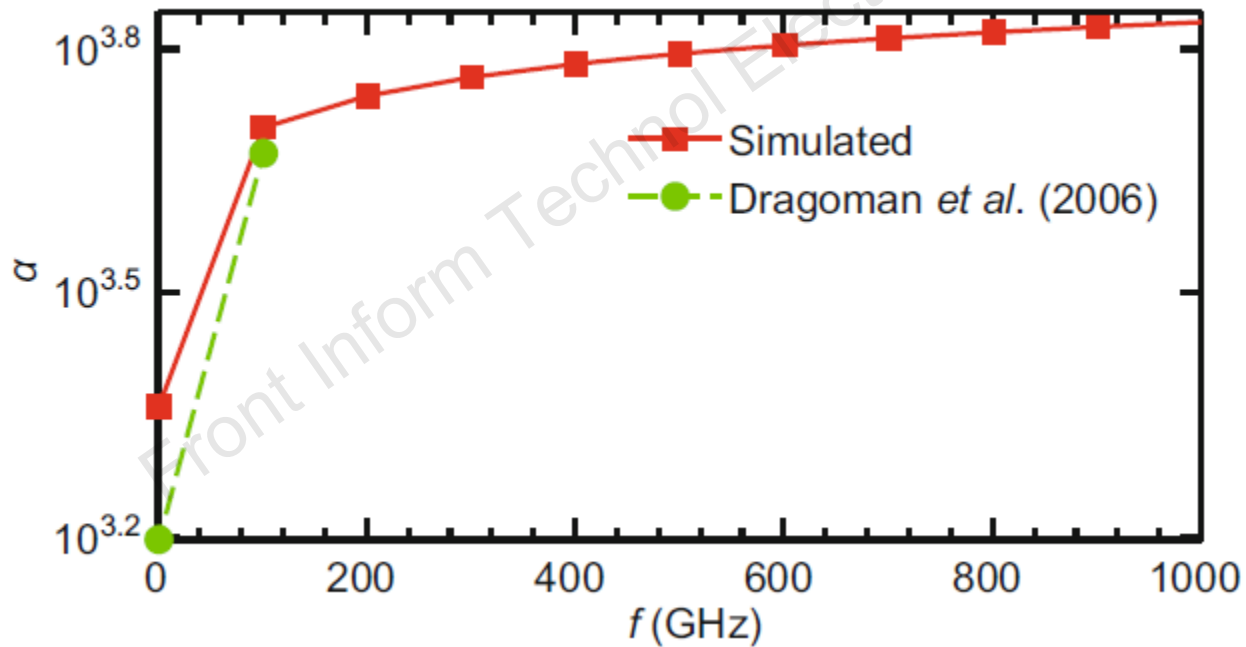


# Major results

- Phase delay exhibits increasing trend with frequency and structural ratio. and frequency

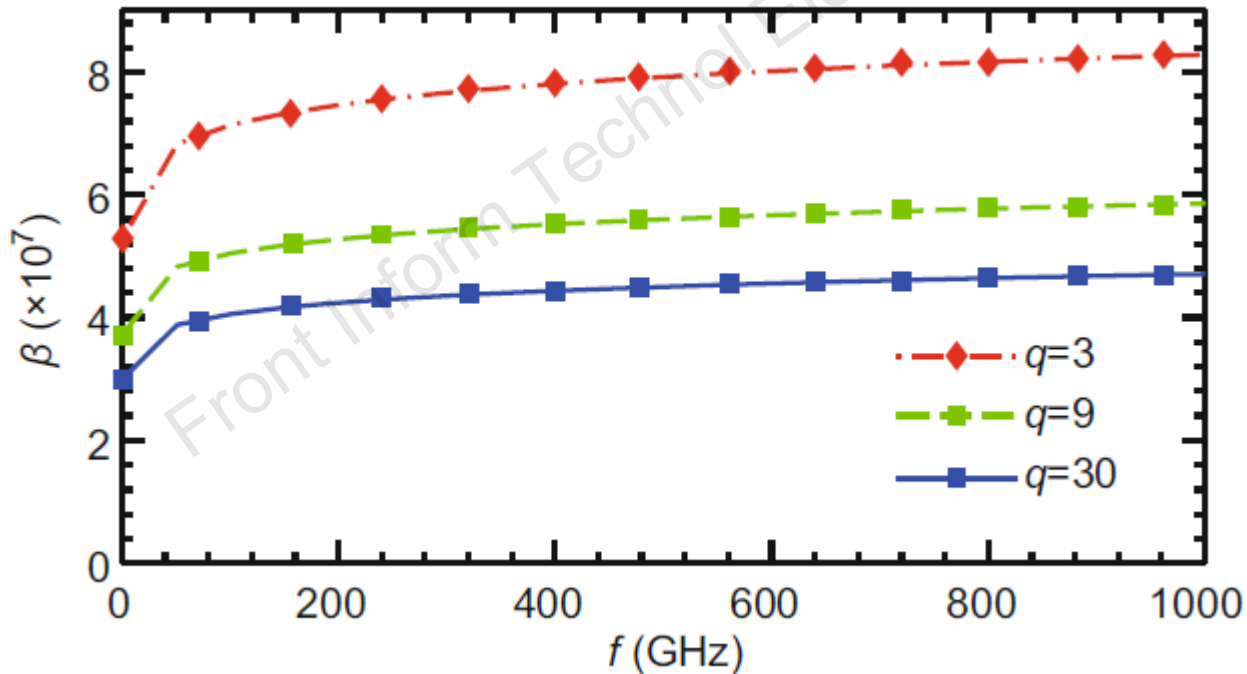


# Major results

- Change of 50% delay time with frequency and structural ratio

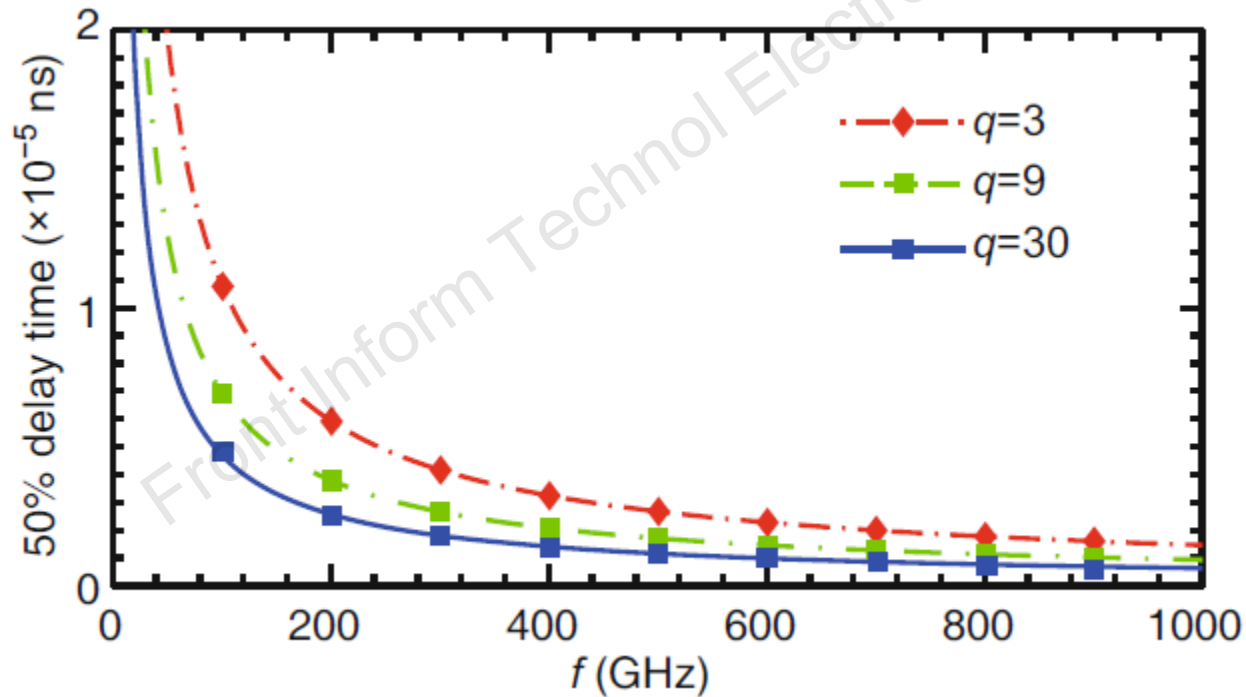

# Major results

- 50% rise time changing with frequency and structural ratio

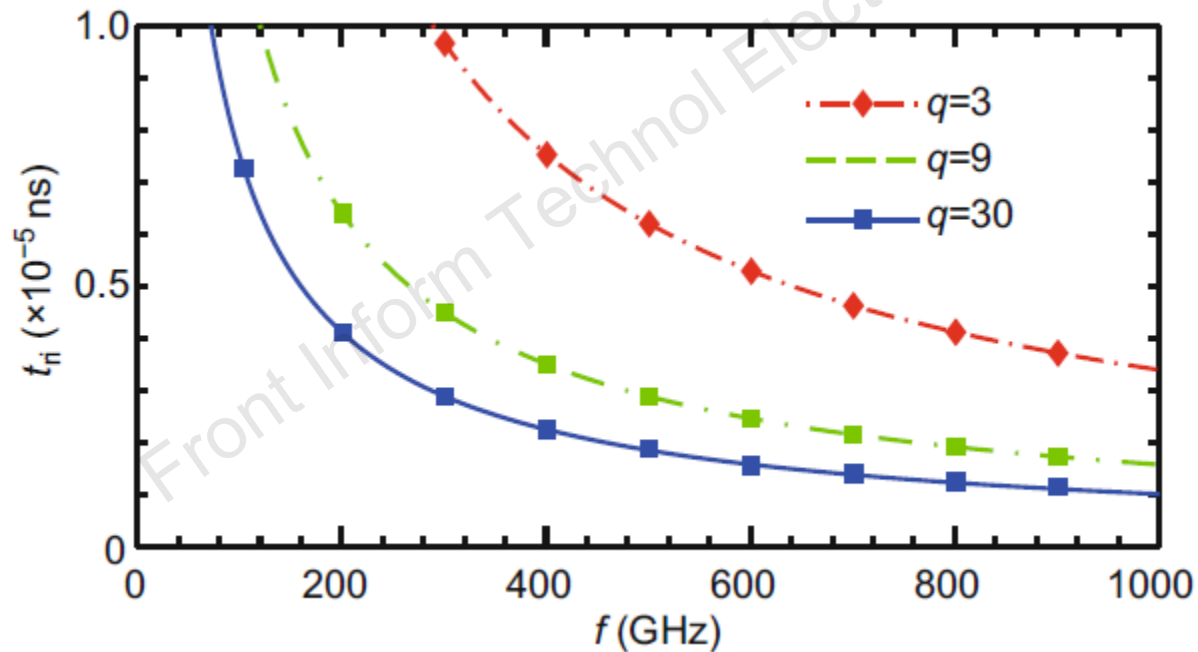

# Major results

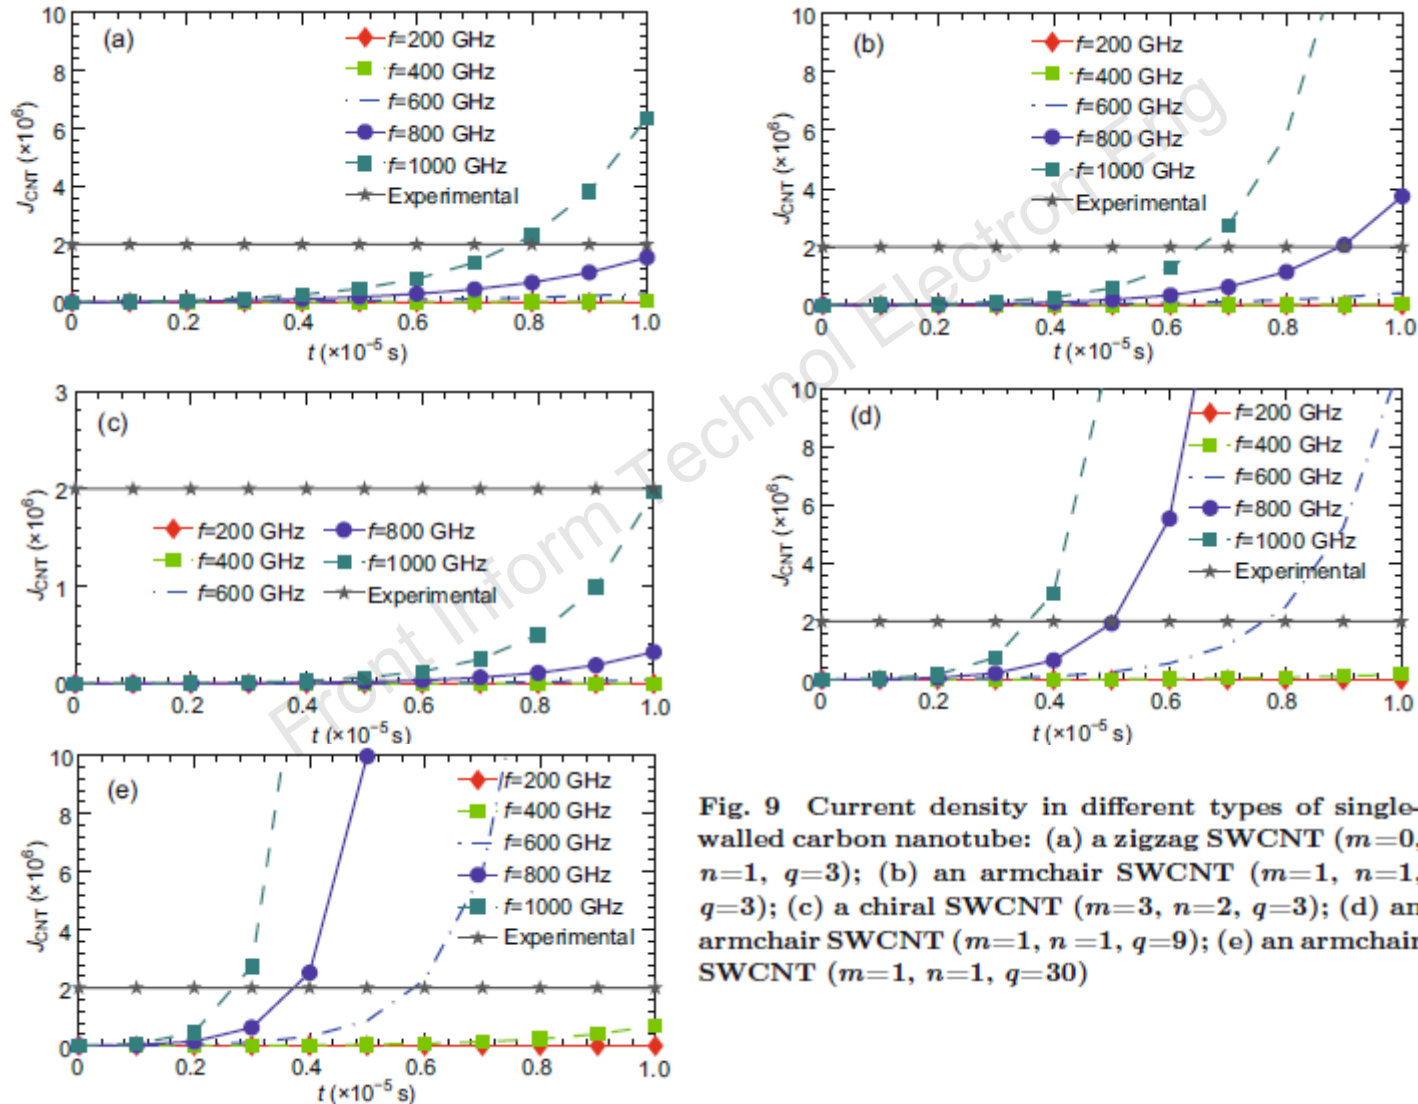


Fig. 9 Current density in different types of single-walled carbon nanotube: (a) a zigzag SWCNT ( $m=0$ ,  $n=1$ ,  $q=3$ ); (b) an armchair SWCNT ( $m=1$ ,  $n=1$ ,  $q=3$ ); (c) a chiral SWCNT ( $m=3$ ,  $n=2$ ,  $q=3$ ); (d) an armchair SWCNT ( $m=1$ ,  $n=1$ ,  $q=9$ ); (e) an armchair SWCNT ( $m=1$ ,  $n=1$ ,  $q=30$ )

# Conclusions

- Different structural ratios and frequency affects electrical parameters of CNT significantly
- Careful design is needed to meet the system specifications
- The work presents a framework to understand these relations.