Sitian WANG, Huarong ZHENG, Jianlong LI, Wen XU, 2025. Frequency of arrival-based state estimation and trajectory optimization for the navigation of autonomous marine vehicles. *Frontiers of Information Technology & Electronic Engineering,* 26(10):2000-2015. https://doi.org/10.1631/FITEE.2500235

Frequency of arrival-based state estimation and trajectory optimization for the navigation of autonomous marine vehicles

Front Inform Technol Electron Eng

Key words: Frequency of arrival; Rolling horizon estimation; Trajectory optimization; Unmanned surface vehicles; Autonomous underwater vehicles; Navigation

Corresponding author: Huarong ZHENG
E-mail: hrzheng@zju.edu.cn
ORCID: https://orcid.org/0000-0003-3155-6792

Motivation

1. Robust navigation for AUVs: Accurate navigation is essential for AUVs in deep-sea exploration, which is challenging with traditional methods.

2. Limitations of existing systems: GPS and acoustic systems have limitations, especially with single-sensor setups.

3. Advantage of FOA: FOA-based methods enable simultaneous position and velocity estimation without time synchronization between the AUV and the USV.

4. Trajectory optimization: Optimizing the USV trajectory enhances AUV observability and state estimation accuracy.

Front Inform Technol Electron Eng

Main idea

1. FOA-based estimation: A single surface sensor estimates the AUV position and velocity using FOA of acoustic signals.

2. Dynamic trajectory optimization: The USV trajectory is adjusted to ensure the best measurement geometry for state estimation.

3. Key innovation: A CRLB-driven cost function is proposed which optimizes observability through distance and angle adjustments.

4. Cost function: CRLB improves accuracy, while distance and angle optimize the USV's position relative to the AUV.

Front Inform Technol Electron Eng

Method

1. FOA-based state estimation: The USV continuously measures the FOA of acoustic signals transmitted by the AUV, which helps estimate the AUV's position and velocity.

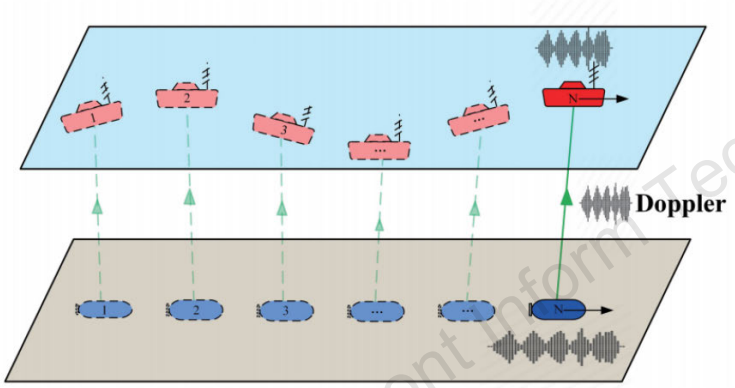


Fig. 1 Illustration of the FOA-based state estimation problem for USV–AUV. A USV (red vehicle) moves on the water surface, while an AUV (blue vehicle) moves underwater at a slowly varying speed. The green line represents the propagation path of the acoustic signals emitted by the AUV and received by the USV. The light-colored vehicles with dashed lines represent the historical states, whereas the dark-colored vehicles with solid lines represent the current states. References to color refer to the online version of this figure

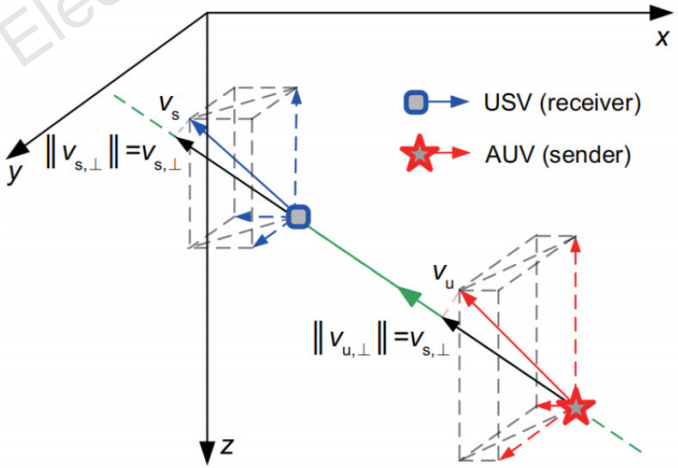


Fig. 2 Decomposition of velocities. The pentagram represents the AUV that sends the acoustic signal with a radial velocity of $v_{u,\perp}$ in the direction of signal propagation. The box represents the USV that receives the signal, and the radial velocity in the direction of signal propagation is $v_{s,\perp}$

Front Inform Technol Electron Eng

Method

2. Rolling horizon AUV state estimation and solution: The particle swarm optimization (PSO) algorithm is used to minimize the combined cost function, adjusting the USV trajectory for optimal geometry in rolling horizon.

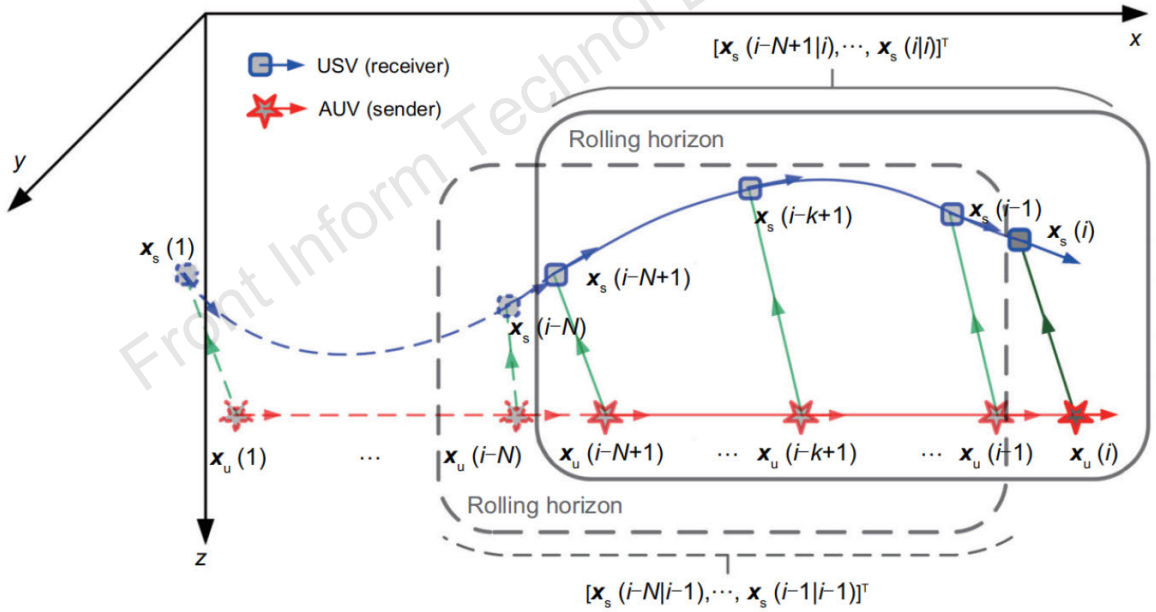


Fig. 3 For each step i, the historical N FOA measurements and USV state measurements $x_s(i-k|i)$ for $k=0,1,\ldots,N-1$ are used to estimate the current AUV state. At step $i+1$, the set of historical measurements is shifted one step forward, and the estimation process is repeated, accounting for the rolling horizon estimation

Front Inform Technol Electron Eng

Method

3. Dynamic trajectory adjustment: The USV trajectory is optimized over time to ensure the best geometry for the AUV's state estimation, which helps maintain good tracking performance.


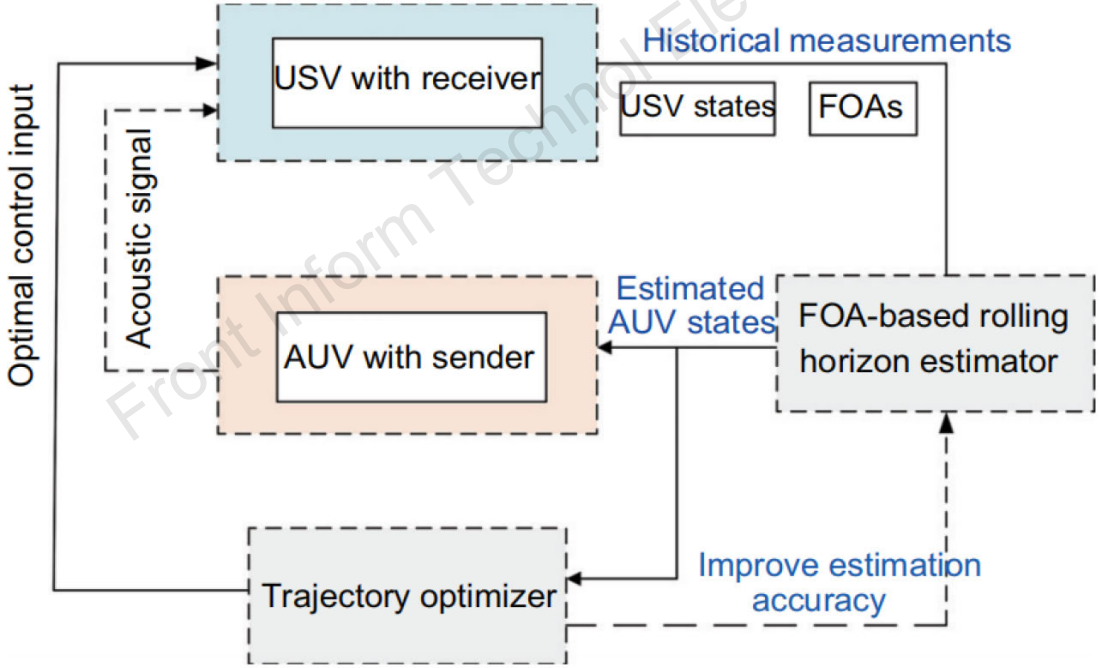


Fig. 5 Closed-loop FOA-based USV–AUV navigation

Front Inform Technol Electron Eng

Major results

Improved estimation performance: The proposed method achieves significantly better AUV state estimation accuracy compared to traditional methods, especially with optimized USV trajectories.

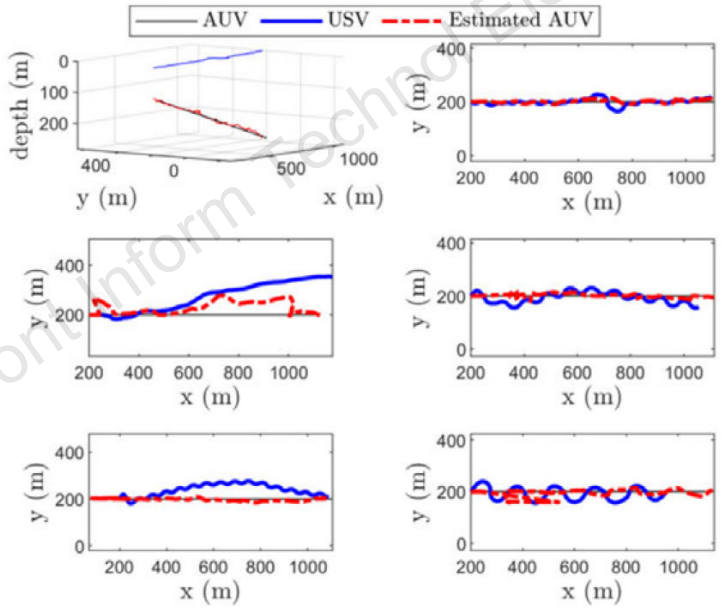

Front Inform Technol Electron Eng

Fig. S7 USV moves along the optimized trajectory and the four specific trajectories in Case 1. The thin black line represents the AUV, the thick blue line represents the USV, and the dashed red line represents the estimated AUV trajectory. The first subfigure shows the 3D trajectories for the optimized USV. The remaining five subfigures, arranged from left to right and top to bottom, display the 2D optimized, LinearFollow, SinFollow 1, SinFollow 2, and SinFollow 3 trajectories, respectively

Major results

Impact of optimization: The optimized trajectory provides superior results in terms of both AUV position and velocity estimation, demonstrating the importance of dynamic trajectory adjustment.

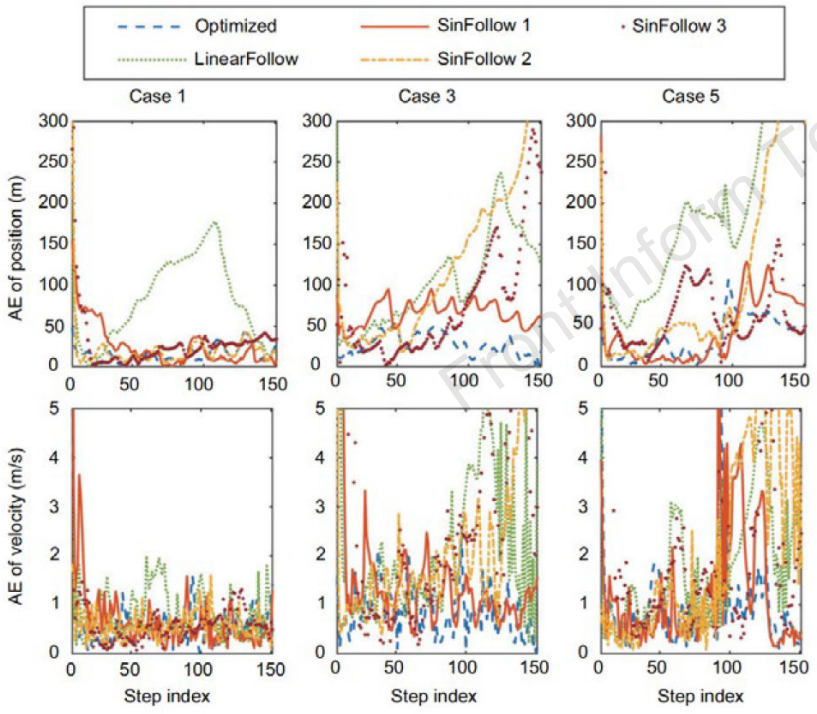


Fig. 6 AE of the estimated position and velocity

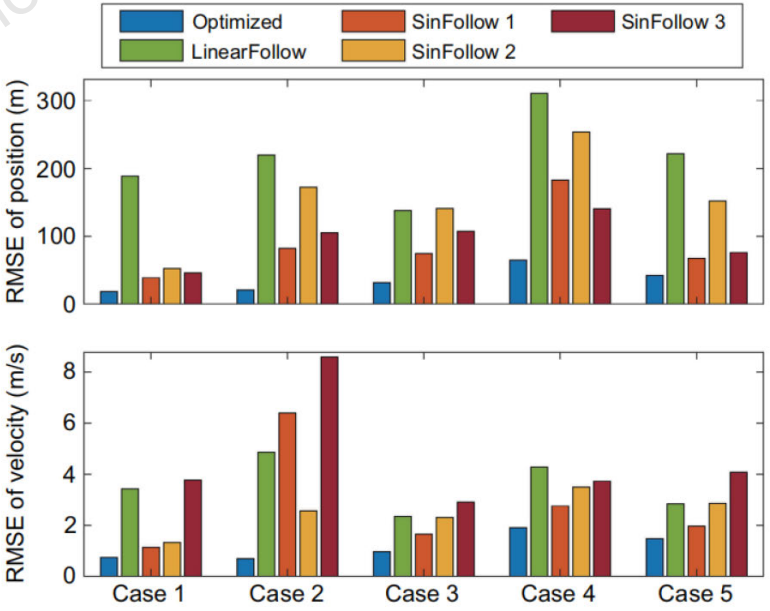


Fig. 8 RMSE of the estimated position and velocity

Front Inform Technol Electron Eng

Major results

Robustness to different configuration factors: The method demonstrates robustness in varying configurations with different AUV depths, etc.

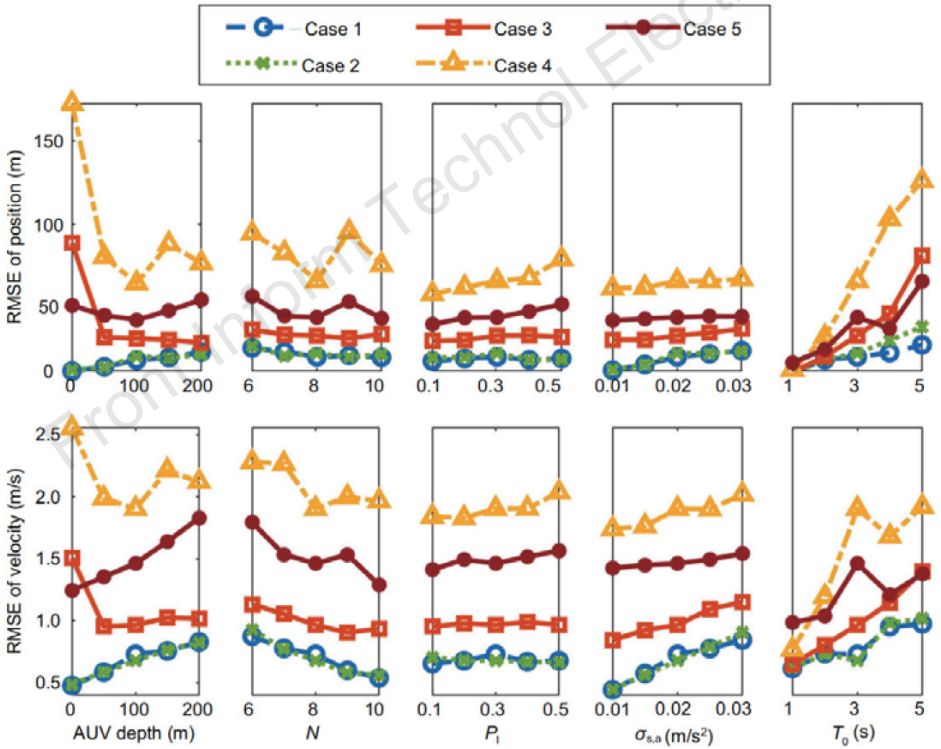


Fig. 10 RMSE of AUV state estimation across different factors

Front Inform Technol Electron Eng

Conclusions

1. Key contribution: A novel FOA-based navigation framework for AUVs is proposed which uses a single USV for state estimation, eliminating the need for time synchronization.

2. Observability and estimation performance: The method improves AUV observability by dynamically optimizing the USV trajectory, leading to better estimation accuracy.

3. Practical implications: This work contributes to advancing real-time, efficient navigation systems for AUVs in underwater environments, with potential applications in marine exploration and monitoring.

Front Inform Technol Electron Eng



Sitian Wang is a Ph.D. candidate at Zhejiang University, specializing in underwater acoustic localization and cooperative navigation of marine vehicles. Her research focuses on frequency of arrival (FOA)-based state estimation and trajectory optimization for autonomous marine systems.



Huarong Zheng received the B.E. degree in logistics engineering and M.S. degree in intelligent transportation engineering from Wuhan University of Technology, Wuhan, China, in 2011 and 2013, respectively, and the Ph.D. degree from the Department of Maritime and Transport Technology, Delft University of Technology, Delft, The Netherlands, in 2016. From 2017 to 2019, she was a Postdoctoral Research Fellow with the College of Control Science and Engineering, Zhejiang University. She is currently a Researcher with the Institute of Ocean Sensing and Networks, Ocean College, Zhejiang University, Zhoushan, China, and also a Group Member of Ocean Information and Equipment with the Hainan Institute of Zhejiang University, Sanya, China. Her research interests include model predictive control, ocean robotics, and distributed control and coordination with applications to waterborne networked systems.

Front Inform Technol Electron Eng



Jianlong Li (Member, IEEE) received the B.S., M.S., and Ph.D. degrees in mechanics from Zhejiang University, Hangzhou, China, in 2000, 2002, and 2005, respectively. He has been with the Department of Information Science and Electronic Engineering, Zhejiang University, as a Full Professor since 2014. His research interests include underwater acoustical signal processing.



Wen Xu (Senior Member, IEEE) received the B.E. degree in electrical engineering from the University of Science and Technology of China (1990), the M.S. degree in acoustics from the Institute of Acoustics, Chinese Academy of Sciences (1993), and the Ph.D. degree in oceanographic engineering from MIT (2001). He was a Research Engineer at the Chinese Academy of Sciences (1993–1996), a Research Scientist at MIT (2001–2002), and a Research Scientist/Senior Research Scientist at Teledyne RD Instruments (2003–2007). He serves as an Associate Editor for *IEEE J Oceanic Eng* and *JASA Expr Lett*, and an editorial board member of *Chinese J Acoust.* His research interests include statistical and array signal processing with applications to sonar, radar, communications, and underwater sensor networks.

Northwestern Polytechnical University