Fengyu SUN, Shuangshuang WU, Zhiming LI, Peilin XIONG, Wenbai CHEN, 2025. Physics-informed neural networks for the prediction of robot dynamics considering motor and external force couplings. *Frontiers of Information Technology & Electronic Engineering*, 26(12):2604-2622. https://doi.org/10.1631/FITEE.2500254

Physics-informed neural networks for the prediction of robot dynamics considering motor and external force couplings

Front Inform Technol Electron Eng

Key words: Dynamics modeling; Physics-informed neural networks; Motor dynamics; External force modeling; Kinematics


Wenbai CHEN
E-mail: chenwb@bistu.edu.cn
ORCID: https://orcid.org/0000-0001-7683-2776

Fengyu SUN
E-mail: sunfengyu@bistu.edu.cn
ORCID: https://orcid.org/0009-0004-9992-6889

Why accurate robot dynamics matter

- Modern manipulators operate in contact-rich tasks—precision assembly, minimally invasive surgery, human–robot collaboration—where unmodeled nonlinearities and external forces rapidly degrade control accuracy.

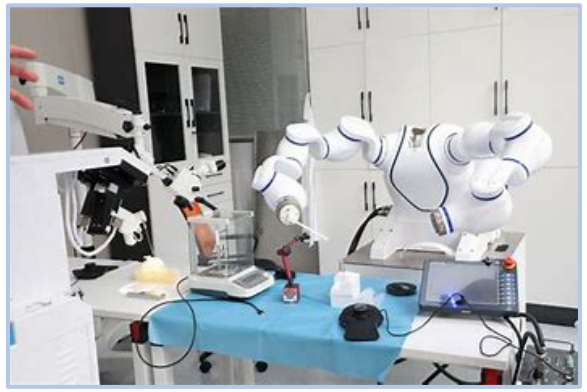

Front Inf ctron Eng

- In modern industry and daily life, the application of robots has become increasingly widespread, spanning various fields such as manufacturing, logistics, healthcare, and service industries.


Motivation & challenges

- **Challenge 1**: Traditional PINNs lack external force modeling → poor accuracy in interaction tasks.
- **Challenge 2:** Industrial robots lack joint torque sensors → hard to obtain precise dynamics data.
- **Goal:** Develop enhanced PINN models with motor dynamics and external force modeling.

Front Inform Technol Electron Eng

Physics-informed neural


Integrating physical prior knowledge with deep learning enhances interpretability and generalization capability.

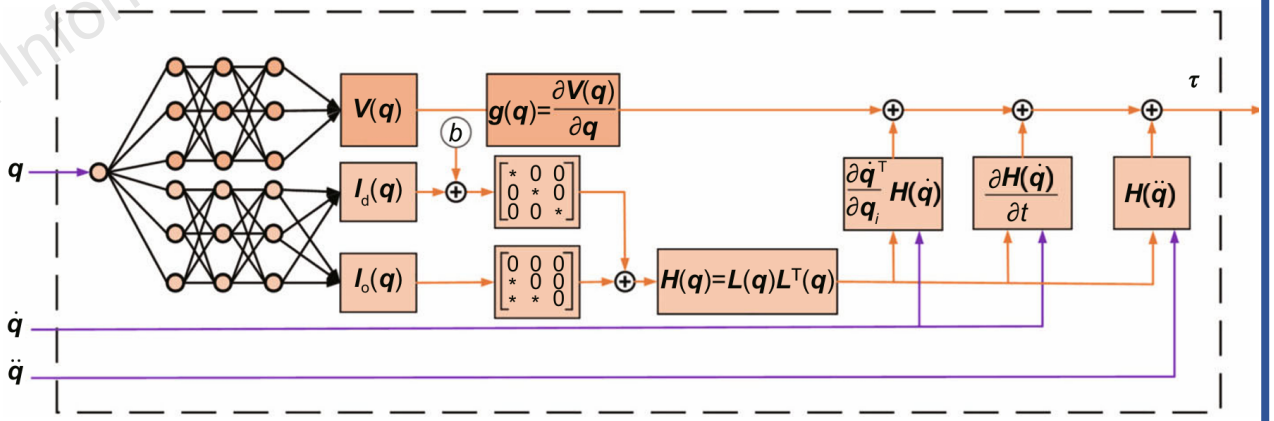

Network architecture of DeLaN

Proposed framework

- **Two enhanced PINN models**: DeLaN-MKF and DeLaN-MJF.
- **Integrate** motor dynamics and external force modeling.
- **Two Jacobian estimation methods**: direct and kinematic differentiation.

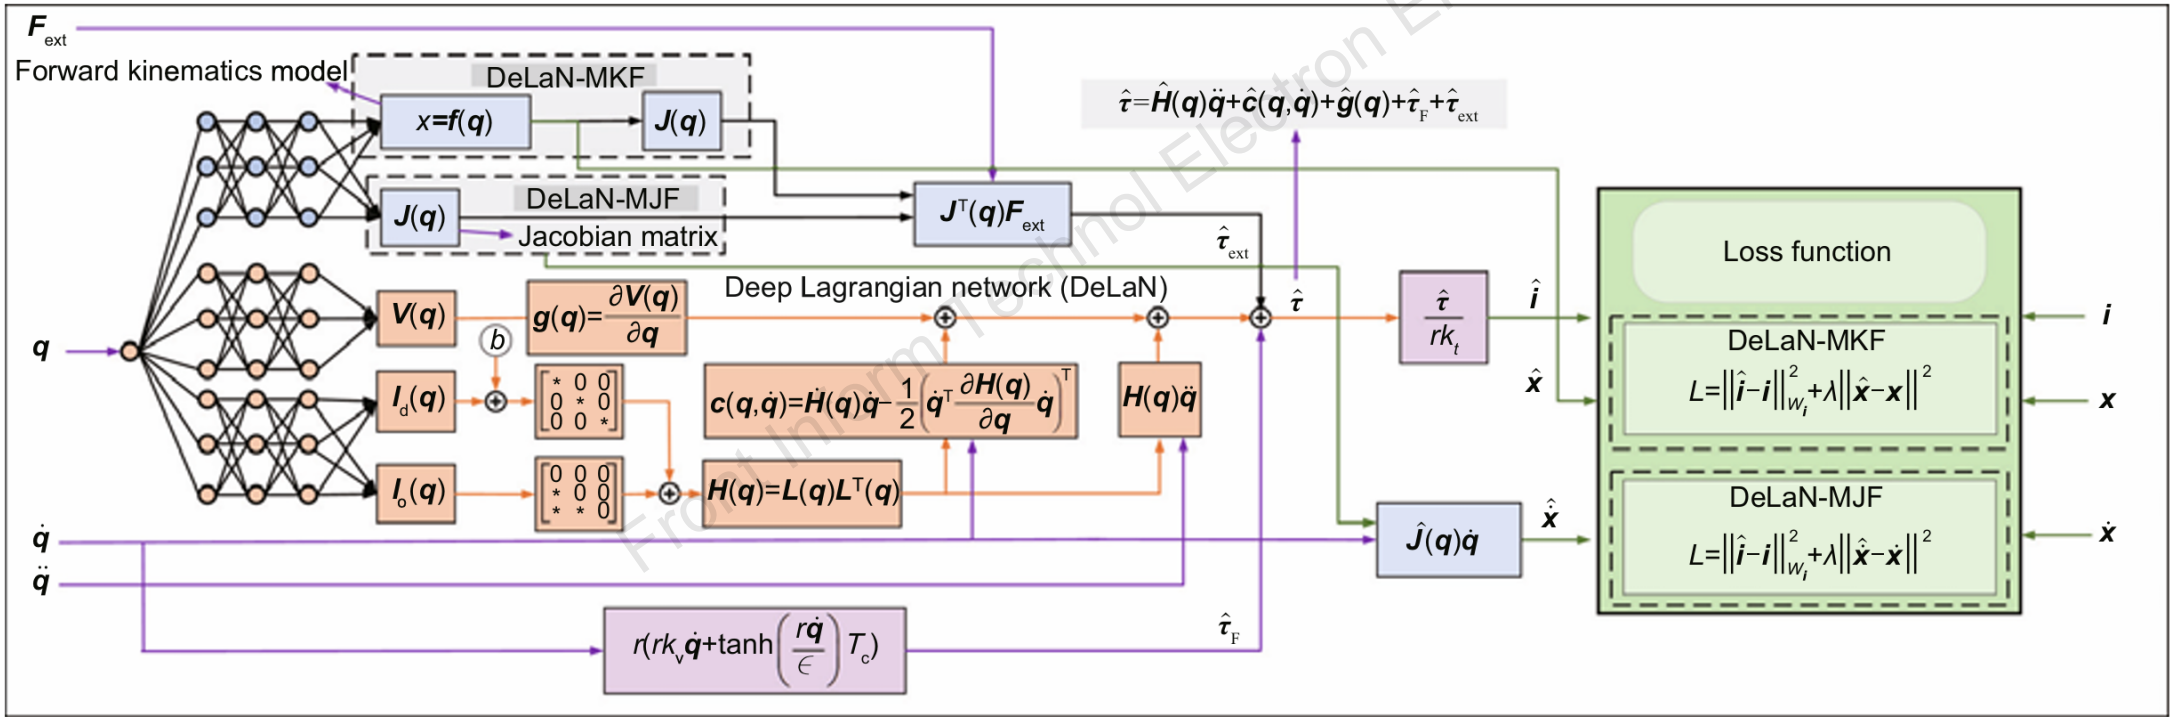

Network architectures of two hybrid PINN-based models that incorporate motor dynamics and external force modeling into the DeLaN network.

1) Motor dynamics modeling

- Model motor current to joint torque mapping.
- **Friction model** from harmonic drives.
- Learn parameters as network weights.

The UR10e is characterized by a high transmission ratio and harmonic drive, allowing the model to be simplified as

$$\boldsymbol{\tau} = r k_{\mathrm{t}} \boldsymbol{i},$$

Because friction in the UR10e robot originates predominantly from harmonic drives, the joint friction torque becomes

$$\boldsymbol{\tau}_{\mathrm{F}} = r\left(r k_{\mathrm{v}} \dot{\boldsymbol{q}} + \tanh\left(\frac{r\dot{\boldsymbol{q}}}{\epsilon}\right) T_{\mathrm{c}}\right)$$

$$T_{\mathrm{c}} = \begin{cases} T_{\mathrm{c}}^{\mathrm{dir}}, & \text{if } \dot{\boldsymbol{q}} \cdot \boldsymbol{\tau}_j \geq 0, \\ T_{\mathrm{c}}^{\mathrm{rev}}, & \text{if } \dot{\boldsymbol{q}} \cdot \boldsymbol{\tau}_j < 0. \end{cases}$$

Front Inform Technol Electron Eng

2) External force modeling

- **Direct Jacobian Method:** Learn mapping from joint velocity to end-effector velocity.
- **Kinematic Differentiation Method:** Learn forward kinematics, and then differentiate.
- Both integrate external torque via Jacobian transpose.

Direct Jacobian

$$\dot{\boldsymbol{x}} = \boldsymbol{J}(\boldsymbol{q})\dot{\boldsymbol{q}}$$

Kinematic differentiation


$$\boldsymbol{x} = f(\boldsymbol{q})$$

$$\boldsymbol{J}(\boldsymbol{q}) = \frac{\partial f(\boldsymbol{q})}{\partial \boldsymbol{q}} = \begin{bmatrix} \frac{\partial f_1}{\partial q_1} & \frac{\partial f_1}{\partial q_2} & \cdots & \frac{\partial f_1}{\partial q_n} \\ \frac{\partial f_2}{\partial q_1} & \frac{\partial f_2}{\partial q_2} & \cdots & \frac{\partial f_2}{\partial q_n} \\ \vdots & \vdots & & \vdots \\ \frac{\partial f_m}{\partial q_1} & \frac{\partial f_m}{\partial q_2} & \cdots & \frac{\partial f_m}{\partial q_n} \end{bmatrix}$$

Front Inform Technol Electron Eng

Experimental setups

- **Robots**: UR5 (simulation), UR10e (real + simulation)
- **Tasks**: Material transport, external force scenarios.
- **Metrics**: NMSE, RMSE, R^2.

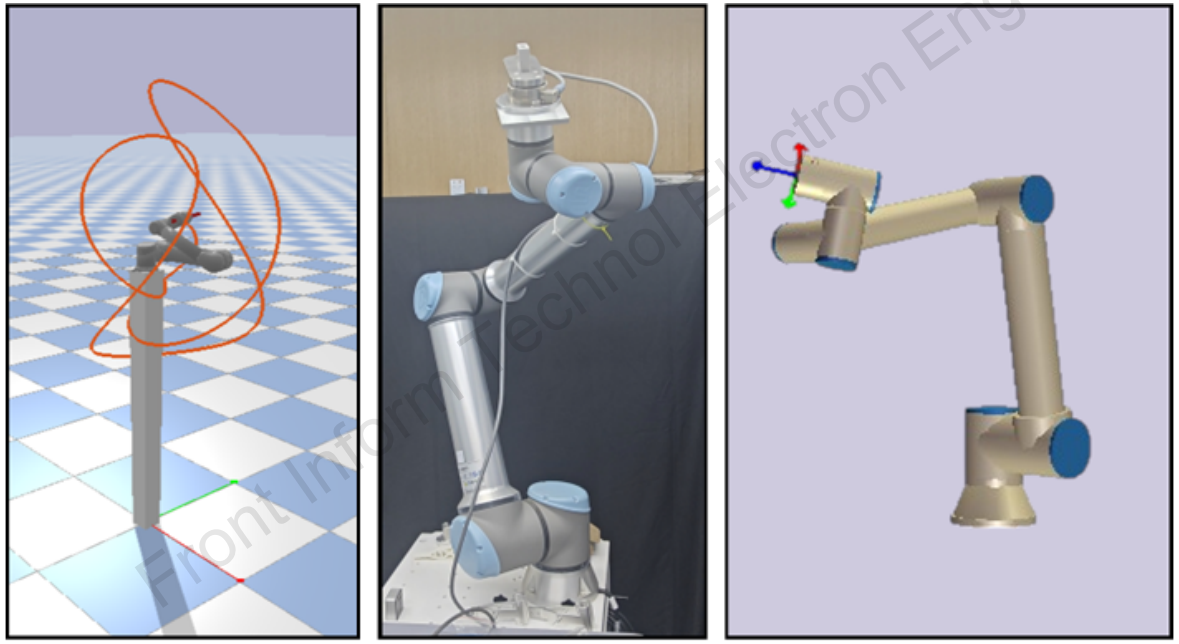


Front Inform Technol Electron Eng

(a) UR5 robot in the simulation environment, demonstrating a trajectory of the end-effector from the test set; (b) real UR10e robot; (c) UR10e robot in the URsim simulation platform

Results—motor dynamics modeling

- DeLaN-motor outperforms FFNN in both simulation and real-world.
- Higher R^2 values, lower NMSE across joints.

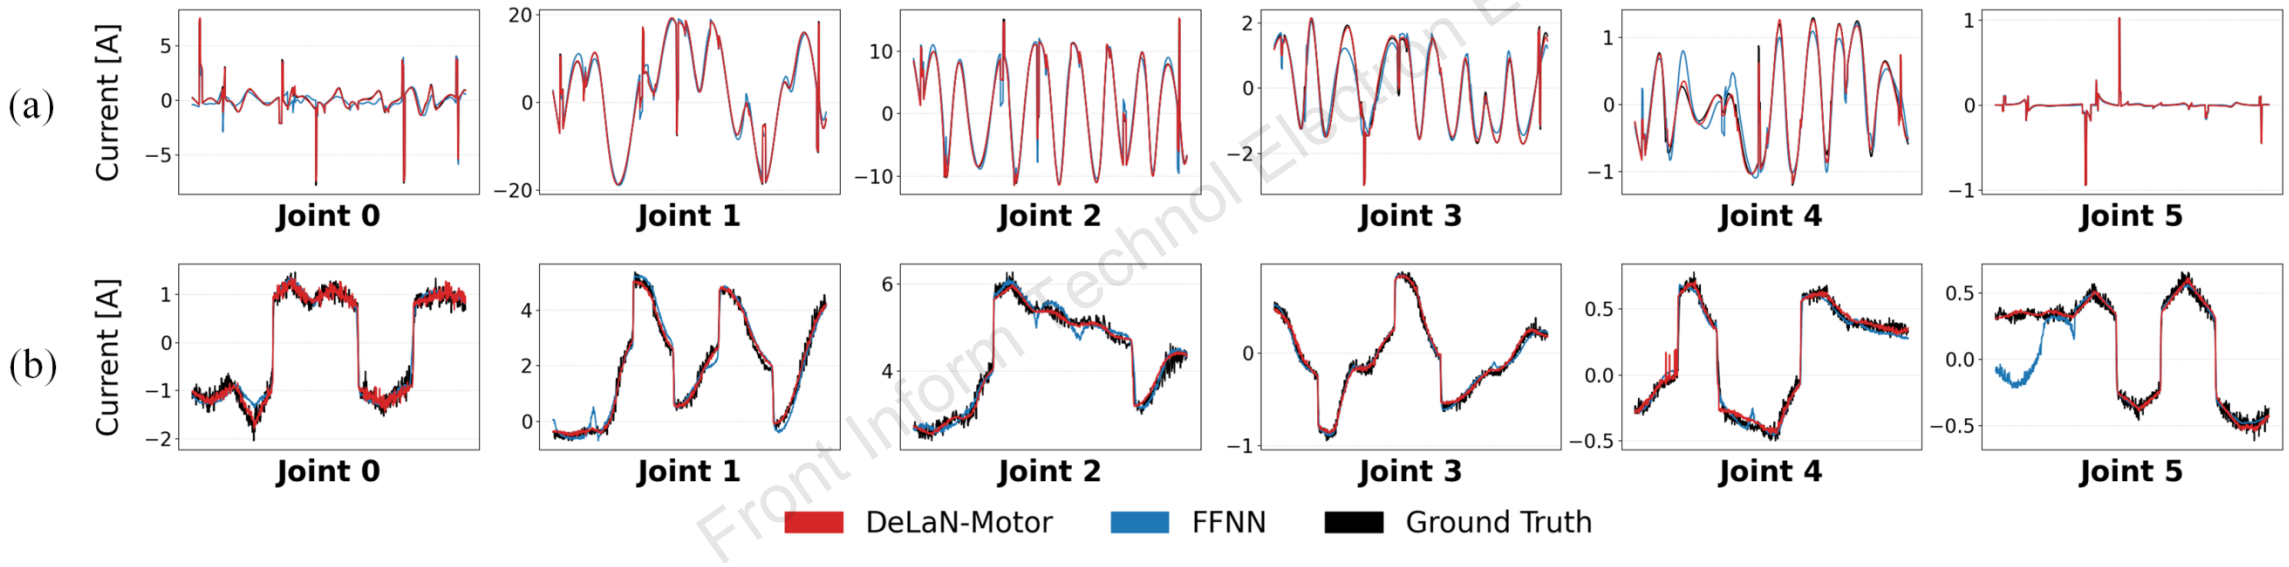


Front Inform Technol Electron Eng


Inverse dynamics learning performance under zero external force

Results—external force modeling performance

- **DeLaN-KF and DeLaN-JF** maintain high R^2 under varying forces.
- **Baselines DeLaN and DeLaN-FFNN** fail when force>8 N.

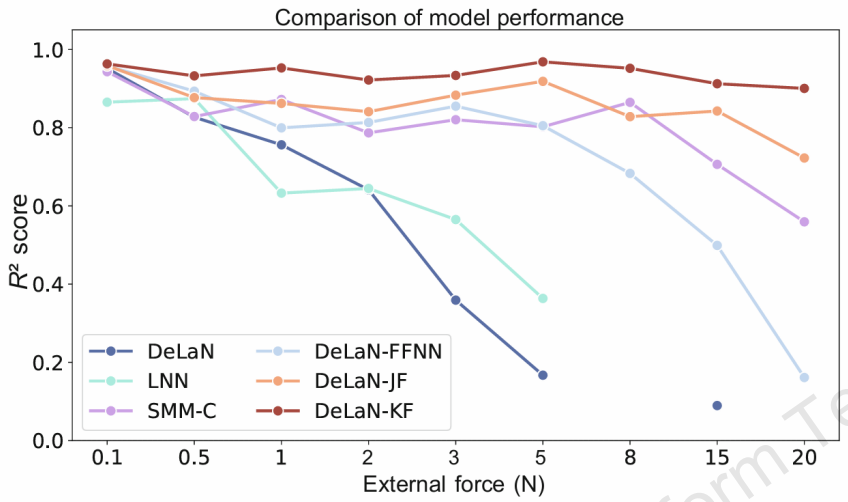

R^2 for joint torque prediction varied with force magnitude.

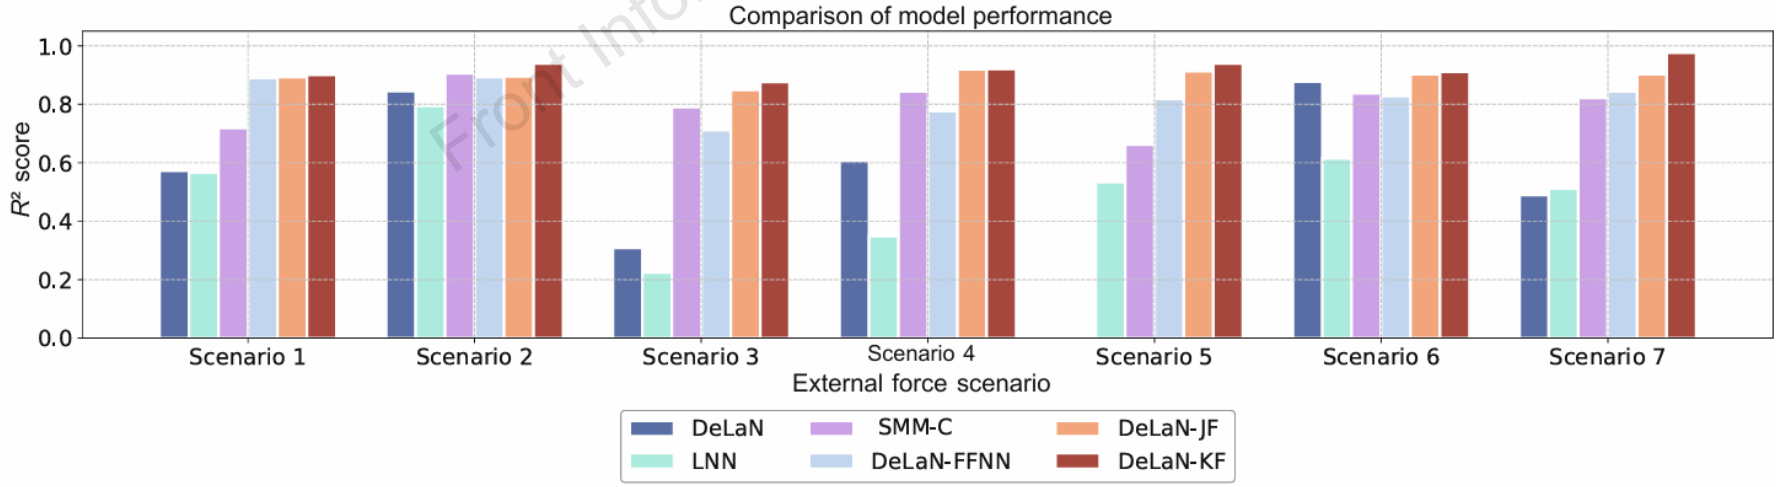


Performance under different external force scenarios


Front Inform Technol Electron Eng

Results—generalization & control performance

- **DeLaN-KF** shows the best generalization under unseen forces.
- **DeLaN-KF** also achieves the lowest tracking error in control tests.

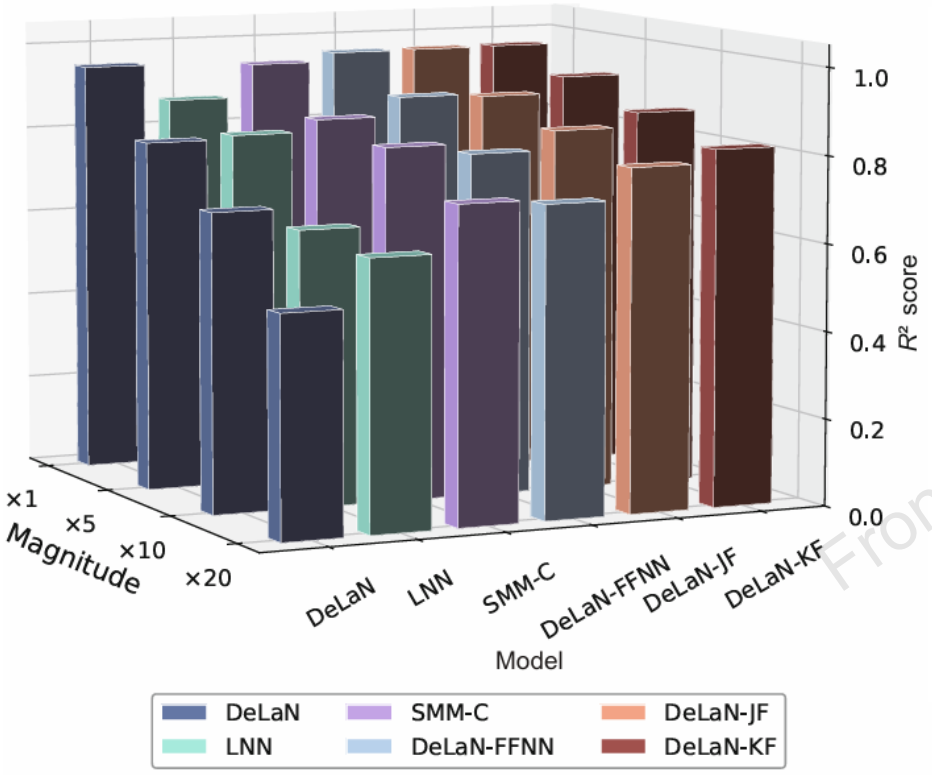

Generalization performance evaluation

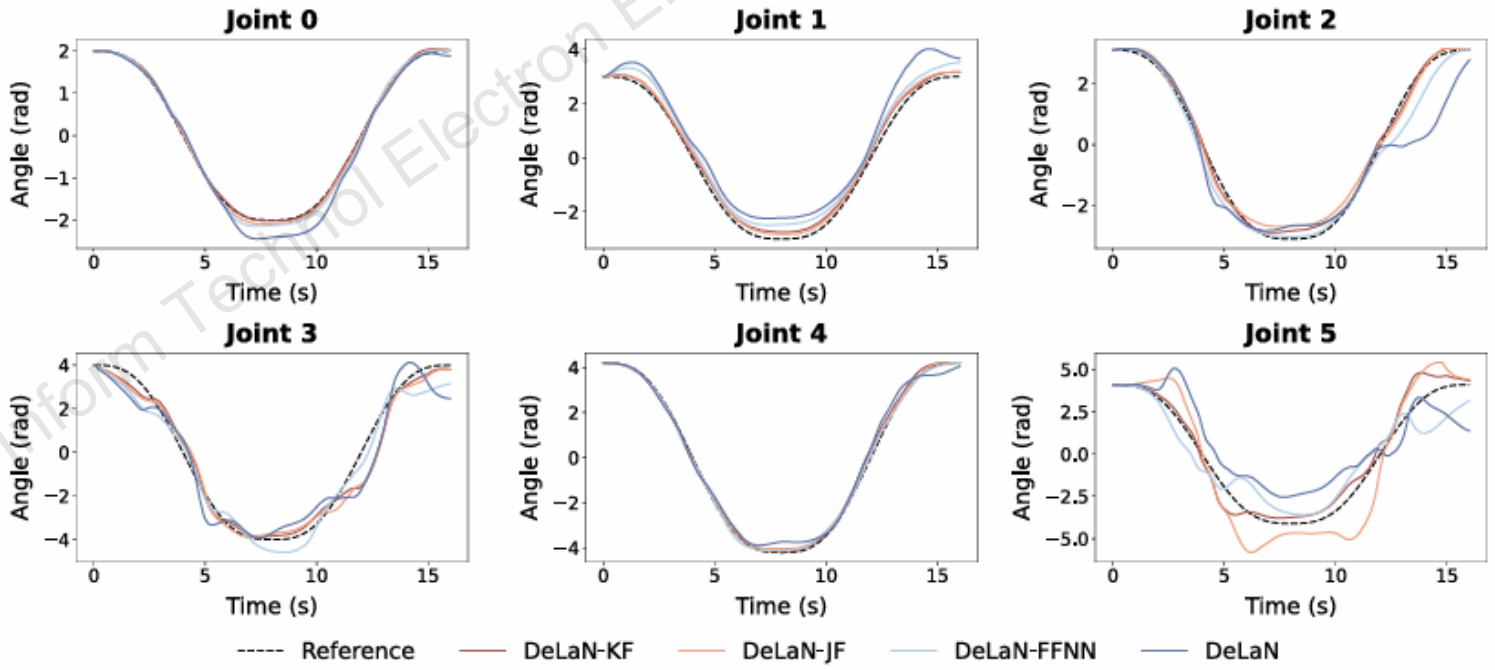

Trajectory tracking performance

Front Inform Technol Electron Eng

Author biography



Fengyu Sun received his B.Eng. degree in automation from Tianjin University of Technology, China, in 2022. He is currently pursuing an M.S. degree in electronic information at Beijing Information Science and Technology University, China. His research interests include deep learning, robot modeling, and control.



Shuangshuang Wu received her B.Eng. degree in automation and her Ph.D. in control science from Yanshan University, China, in 2014 and 2020, respectively. From 2018 to 2019, she was a visiting researcher at the School for Engineering of Matter, Transport, and Energy, Arizona State University, USA. From 2020 to 2022, she was a postdoctoral researcher in the Department of Computer Science and Technology at Tsinghua University. She is currently a lecturer in the College of Automation at Beijing Information Science and Technology University, China. Her research interests include time-delay systems, intelligent modeling, and control.



Zhiming Li received his B.Eng. degree in automation from Lanzhou Jiaotong University, China, in 2022. He is currently an M.S. candidate in control science and engineering at Beijing Information Science and Technology University, China. His main research interests include deep learning, robot modeling, and control.

Front Inform Technol Electron Eng

Author biography



Peilin Xiong is currently an M.S. candidate in control engineering at Beijing Information Science and Technology University. His main research interests include knowledge representation and reasoning, skill learning and evolution, and teleoperation. His current work focuses on methods based on knowledge representation and reasoning, exploring how to enhance the intelligence of robotic arms through effective knowledge representation and reasoning mechanisms.



Wenbai Chen received the B.S. degree from Northwest University, China, in 1997, the M.S. degree from Yanshan University, China, in 2004, and the Ph.D. degree from Beijing University of Posts and Telecommunications, China, in 2011. He is currently a professor with the College of Automation, Beijing Information Science and Technology University. His research interests include intelligent robotics, artificial intelligence, sensor fusion, machine learning, and wireless sensor networks.

Front Inform Technol Electron Eng