

# Numerical study of heat transfer characteristics of downward supercritical kerosene flow inside circular tubes

Jing-zhi ZHANG, Jin-pin LIN, Dan HUANG, Wei LI

Cite this as: Jing-zhi ZHANG, Jin-pin LIN, Dan HUANG, Wei LI, 2018. Numerical study of heat transfer characteristics of downward supercritical kerosene flow inside circular tubes. *Journal of Zhejiang University-SCIENCE A (Applied Physics & Engineering)*, 19(2):158-170. <https://doi.org/10.1631/jzus.A1600276>

# Numerical Model

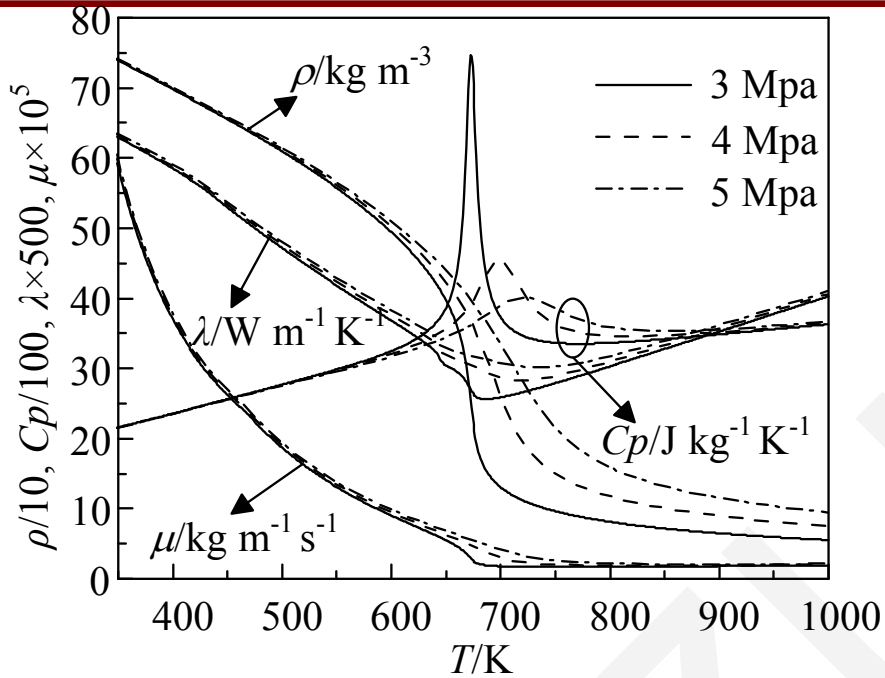


Fig. 1. Thermophysical properties of China RP-3 aviation kerosene

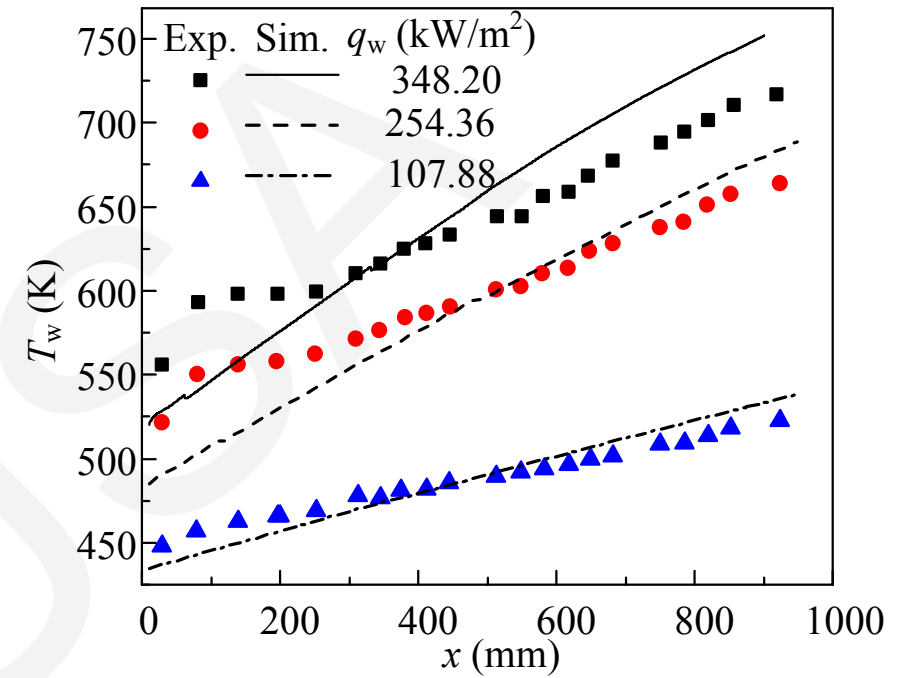


Fig. 2. Comparison between numerical results and experimental data

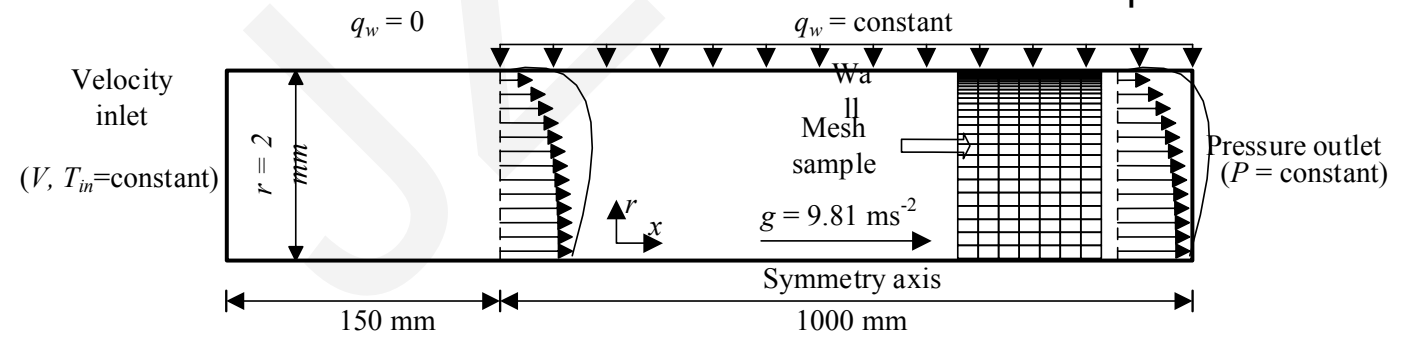


Fig. 3. Schematic of the computational configuration

# Heat Transfer Deteriorations

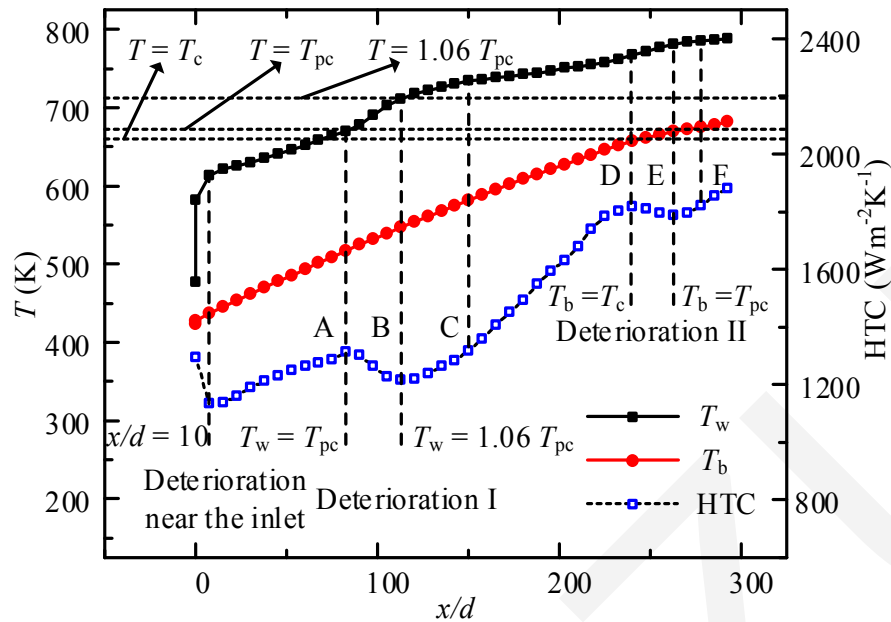


Fig. 4. The wall temperature ( $T_w$ ), liquid bulk temperature ( $T_b$ ), and heat transfer coefficient (HTC) distributions along the tube axial direction

1. Three types of heat transfer deteriorations were observed in the downward supercritical flow.
2. The first type of deterioration is caused by the development of the thermal boundary layer and exists at the entrance of the tube within  $x/d = 10$ .
3. The second and third types of deterioration appear when the wall or bulk fuel temperature approaches the pseudo-critical temperature. Drastic variations of the kerosene properties and the concurrent thermal acceleration effect in the near-wall region are the main reasons for the second type of deterioration.

# Heat Transfer Deteriorations



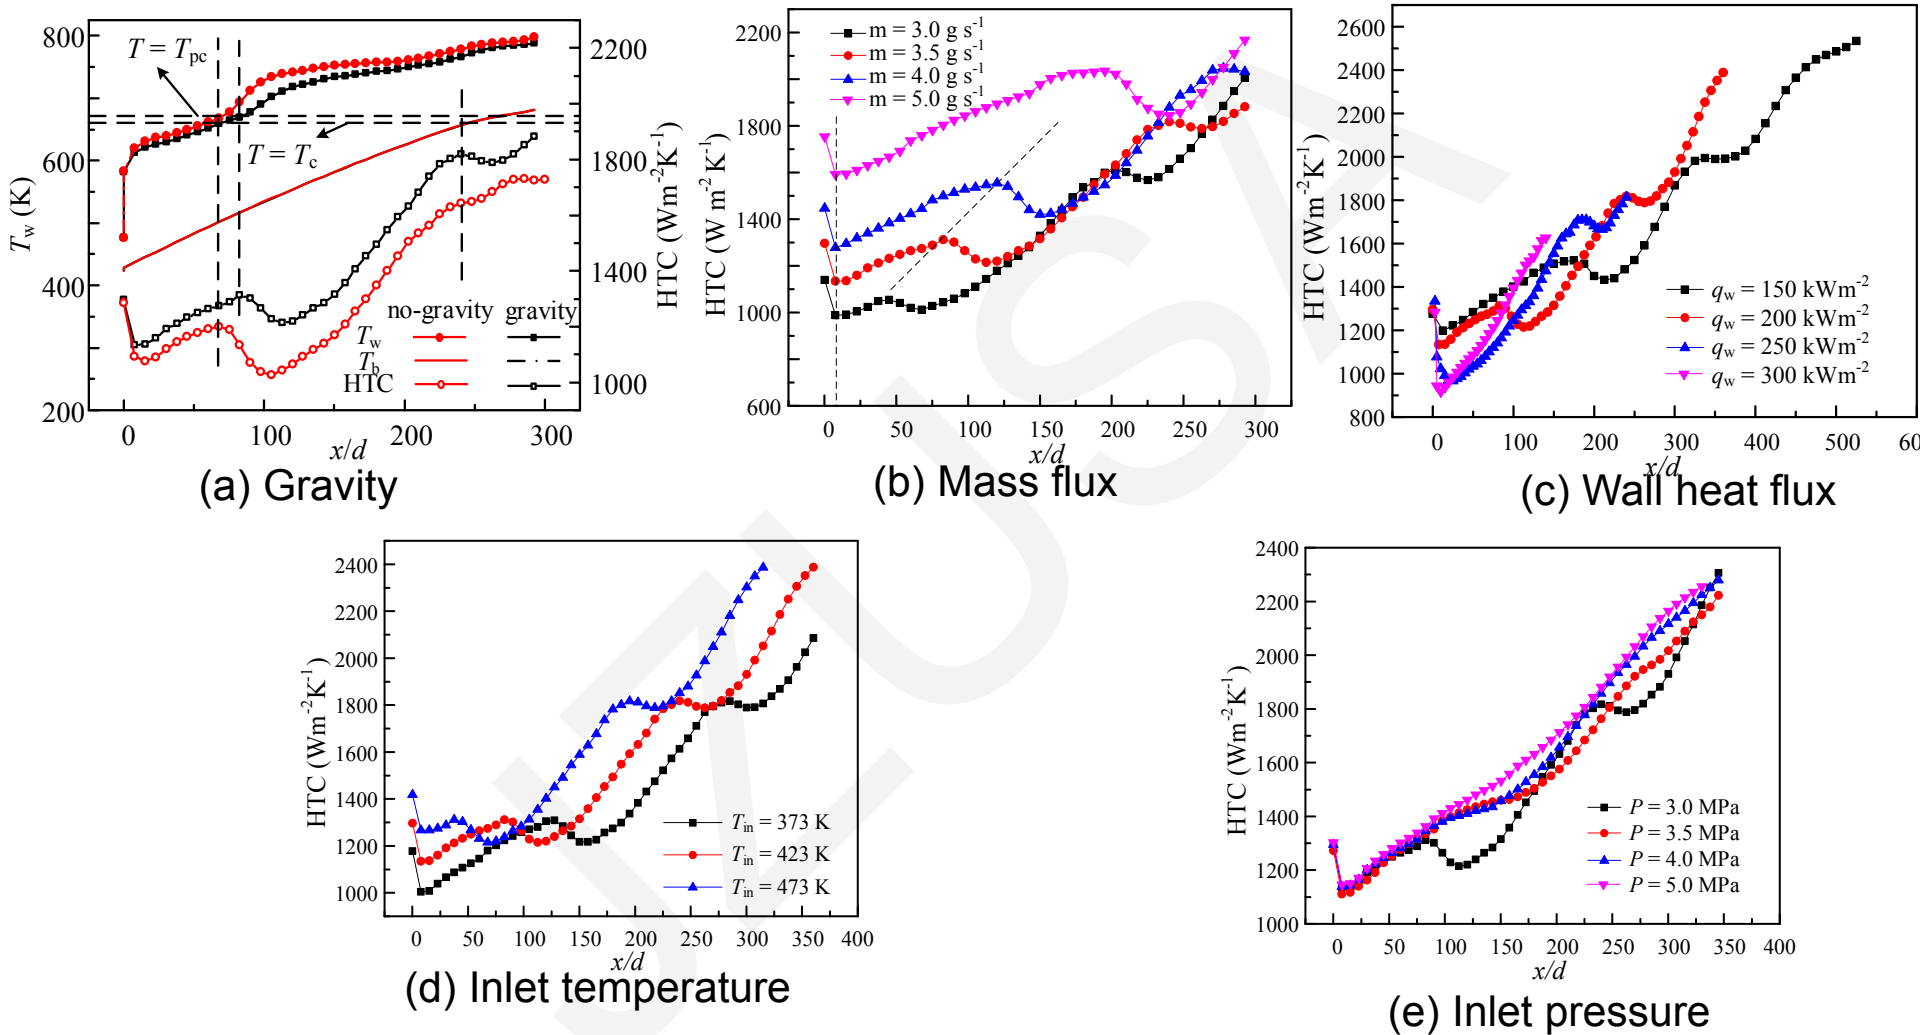


Fig. 5. Effects of gravity, mass flux, wall heat flux, inlet temperature, and inlet pressure on HTC

# Comparisons with empirical correlations

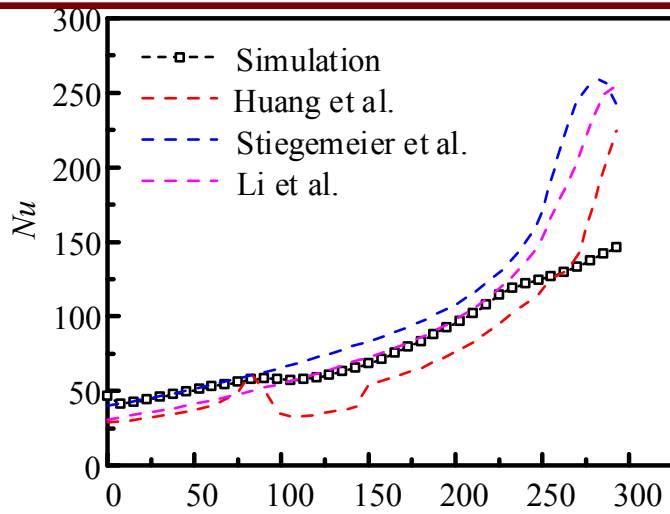

(a) 3 Mpa  $x/d$

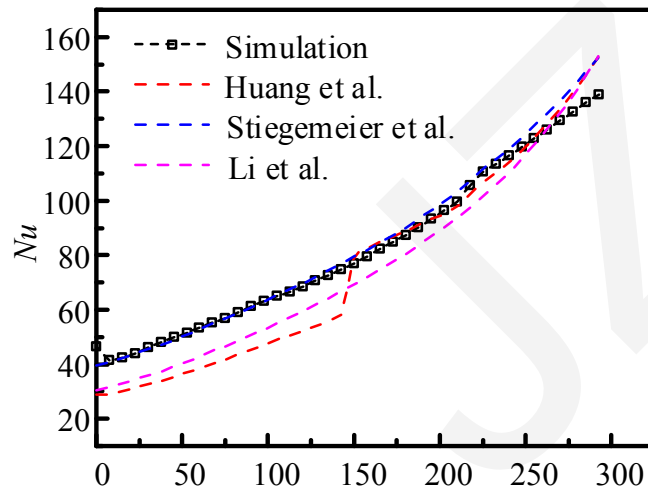

(b) 5 Mpa  $x/d$

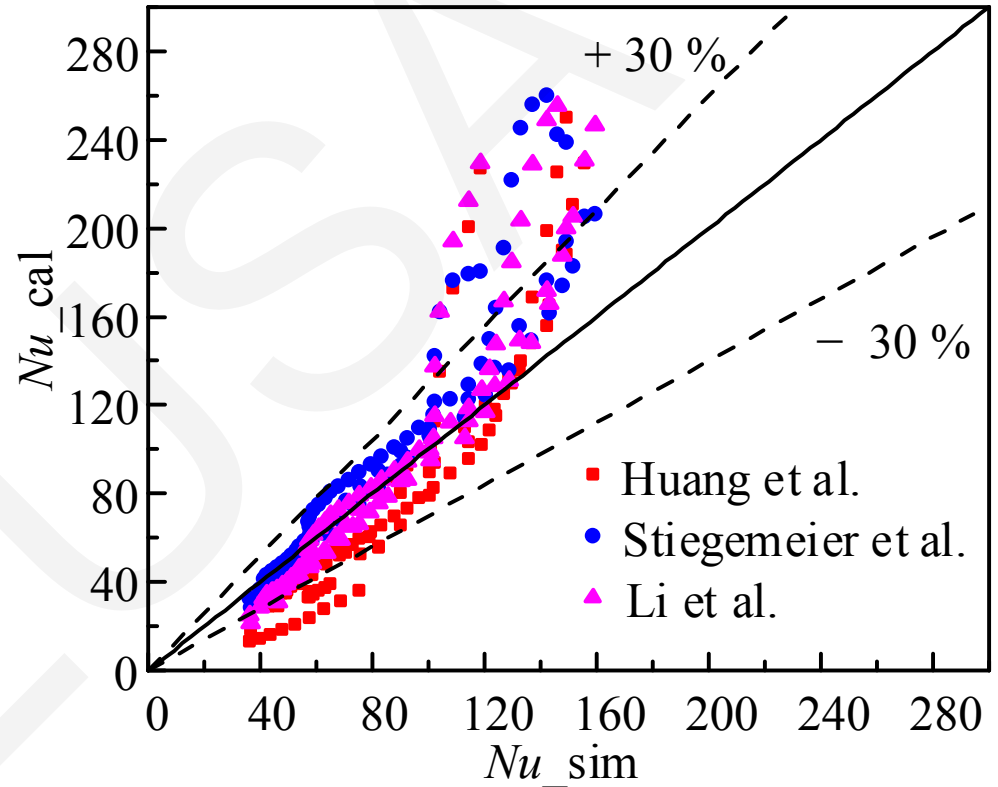


Fig. 6. Comparison of Nu between simulation and empirical correlations

# Conclusions

1. The mass flow rate has no effect on the end of Deterioration near the inlet, while a higher mass flow rate delays the onsets of Deterioration I and Deterioration
2. The onsets of Deterioration I and Deterioration II are delayed along the tube axial direction under lower  $q_w$ , while the deterioration is more pronounced at a higher wall heat flux.
3. The inlet temperature only affects the starting point of the heat transfer process.
4. The effect of  $P$  on Deterioration near the inlet is negligible. Deterioration I and Deterioration II are not observed for the cases with  $P$  higher than 3 MPa because of the more moderate variations of properties of kerosene under higher pressures.