

Cite this as: Chang Liu, Hong Zhao, Wei-ying Yang, Kun-zan Qiu, Jian-guo Yang, Zi-wen Geng, Wei-ming Teng, Wei-zhong Yuan, Xi-jiong Chen, 2018. Chemical kinetics simulation of semi-dry dechlorination in coal-fired flue gas. *Journal of Zhejiang University-SCIENCE A (Applied Physics & Engineering)*, 19(2):148-157.

<https://doi.org/10.1631/jzus.A1600653>


Chemical kinetics simulation of semi-dry dechlorination in coal-fired flue gas

Key words:

coal-fired flue gas; semi-dry dechlorination; chemical kinetics; competition relationship; Na/Cl; CHEMKIN

The idea of the dechlorination system

- Objective: Zero discharge of waste water of FGD
- Through spraying alkaline solution into flue gas after APH, HCl can be removed by neutralization reactions and the final products would be discharged in ESP.
- When HCl and other acid gases are largely removed, the quantity of waste water of FGD would be greatly reduced.
- The significantly reduced waste water would be used as solvent of alkali circularly sprayed in the flue.

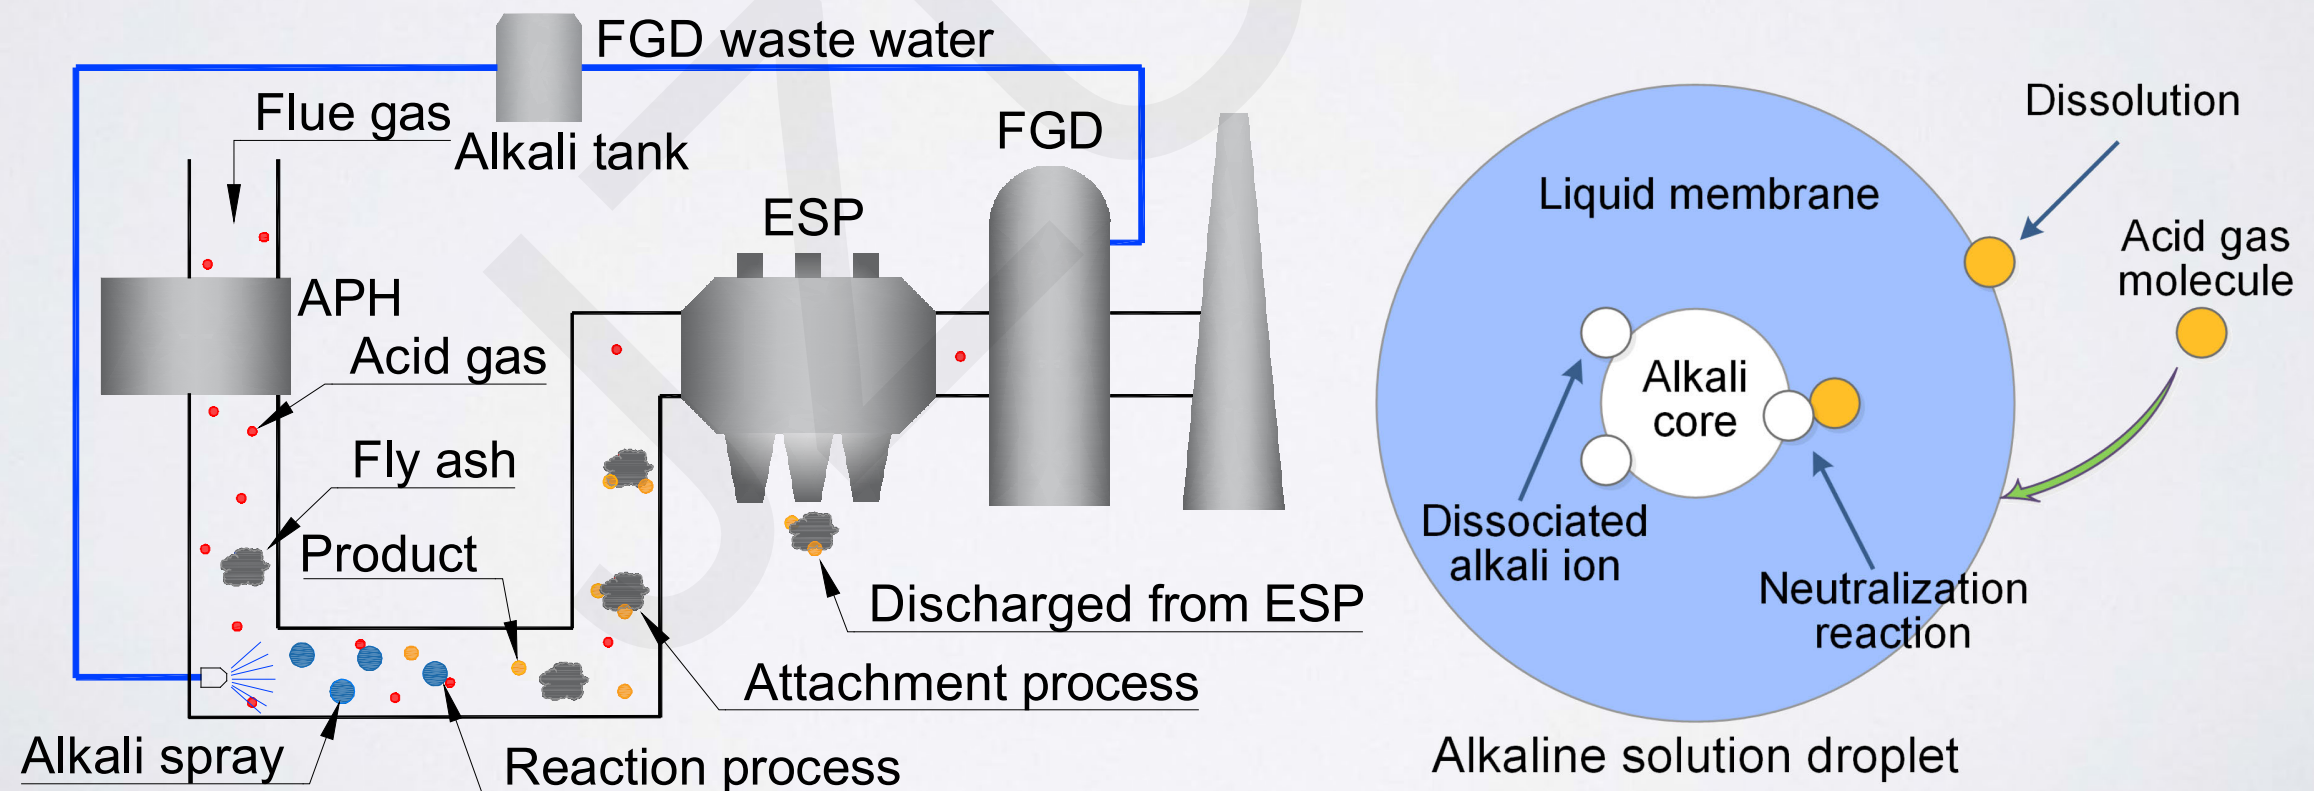


Research methods

- Simulated with CHEMKIN
- Composition of flue gas was measured on a 660MW boiler
- The simulated flue gas: HCl, SO₂, SO₃ & N₂
- Alkali: NaOH

Component	CO ₂ (%, v/v)	H ₂ O (%, v/v)	O ₂ (%, v/v)	SO ₂ (mg/Nm ³)	SO ₃ (mg/Nm ³)	HCl (mg/Nm ³)	HF (mg/Nm ³)	N ₂ (%, v/v)
Concentration	14.00	7.50	3.00	2285.71	32.14	54.59	25.36	75.46


Influence of Na/Cl on reaction efficiency of HCl

- Reaction efficiencies of HCl, SO₂ and SO₃ are positively correlated with Na/Cl.
- The high concentration of SO₂ in flue gas has great influence on the semi-dry dechlorination process. However, the reaction efficiency of HCl is still significant.
- When Na/Cl is 5, the reaction efficiency of HCl & SO₃ reach 70.71% & 52.72%.

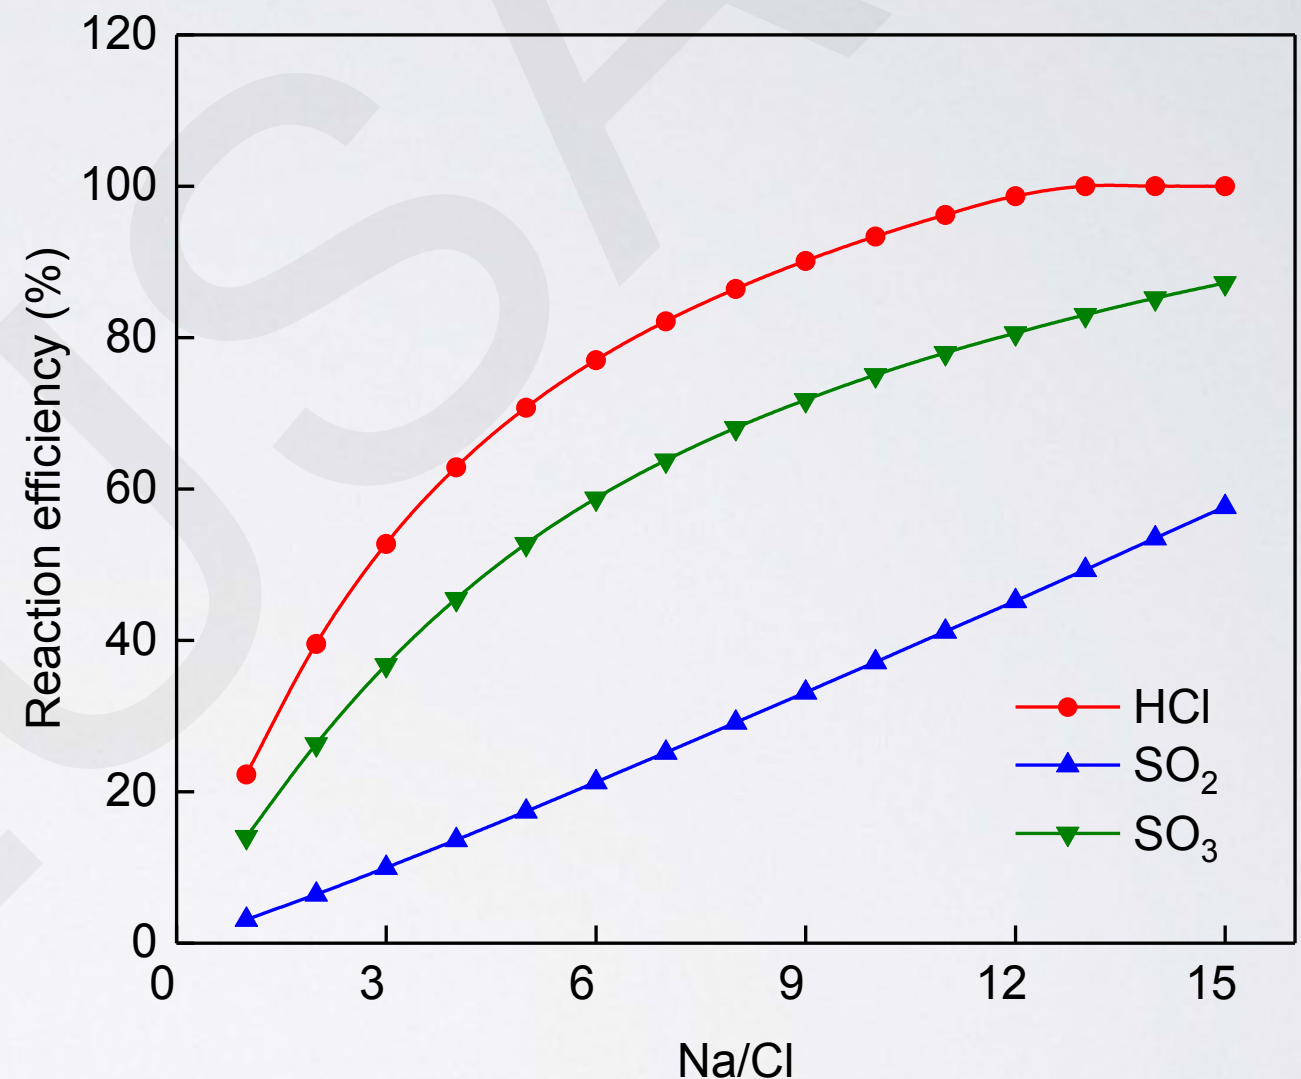

Experimental conditions: temperature, 393.15 K;
reaction time, 1 second

Influence of SO₂ on reaction efficiency of HCl

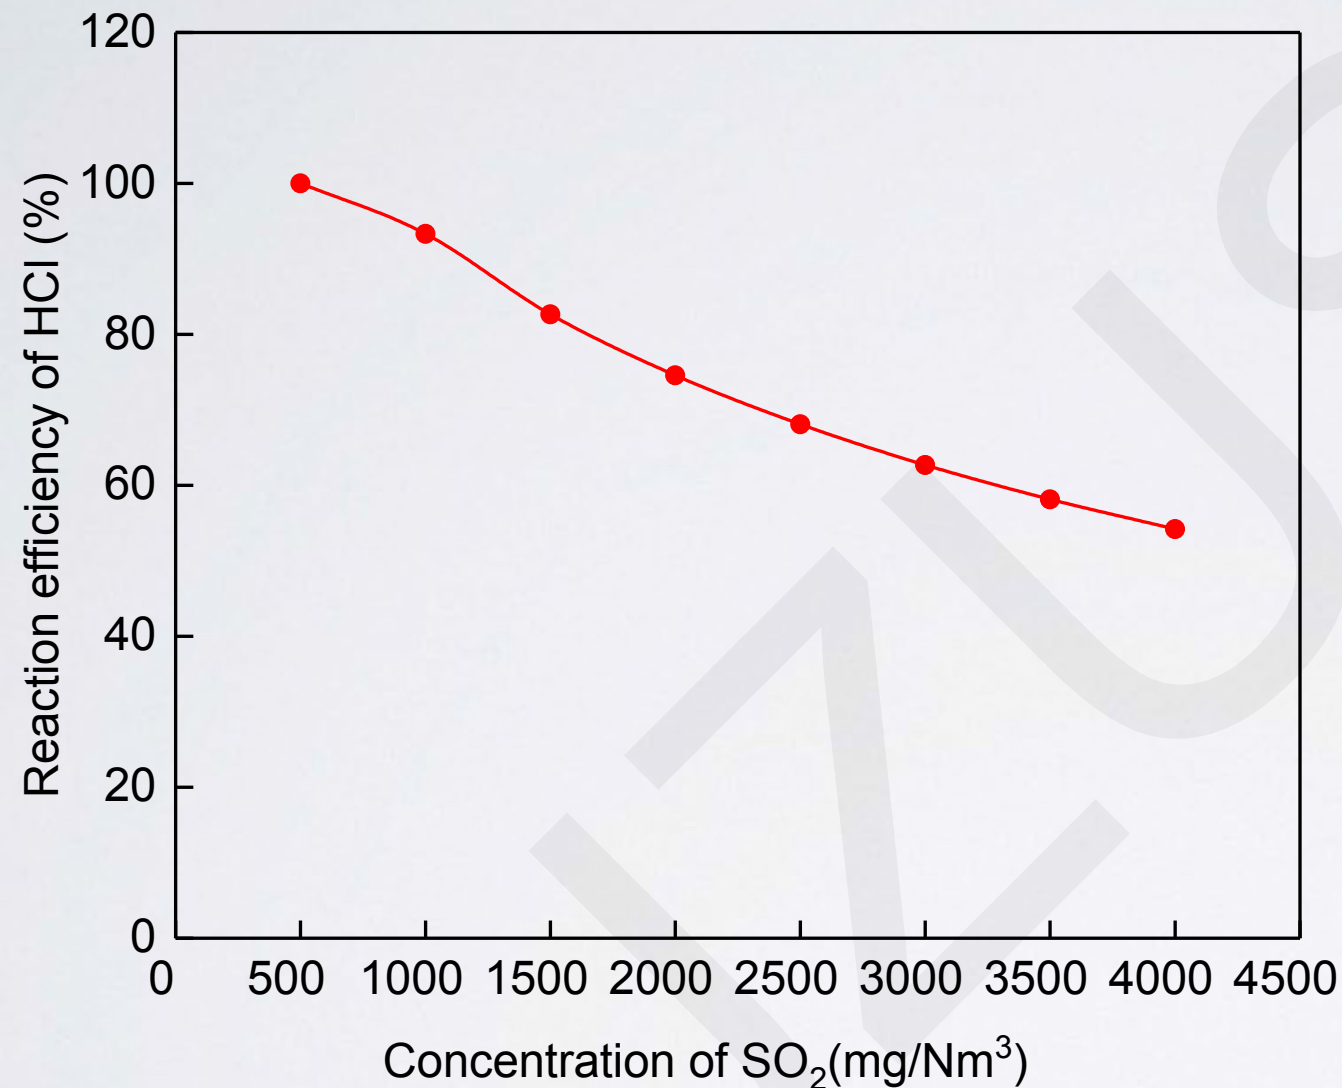


Experimental conditions: temperature, 393.15 K;
reaction time, 1 second; Na/Cl, 5

- When the concentration of SO₂ changes in large measure, the reaction efficiency of HCl is greatly affected.
- When SO₂ concentration changes 1000 mg/Nm³, the reaction efficiency of HCl changes about 13%.
- However, for a specific boiler, the burning coal is usually relatively, the reaction efficiency of HCl would not be greatly affected.


Influence of flue temperature on the reaction efficiency of HCl

- The simulated result showed that the reaction efficiency of HCl is not sensitive to the flue temperature.
- However, in practice, the flue temperature may significantly affect the persistence of liquid drops, and this would affect the process of semi-dry dechlorination.
- So the effect of flue temperature on HCl reaction efficiency still needs further study.

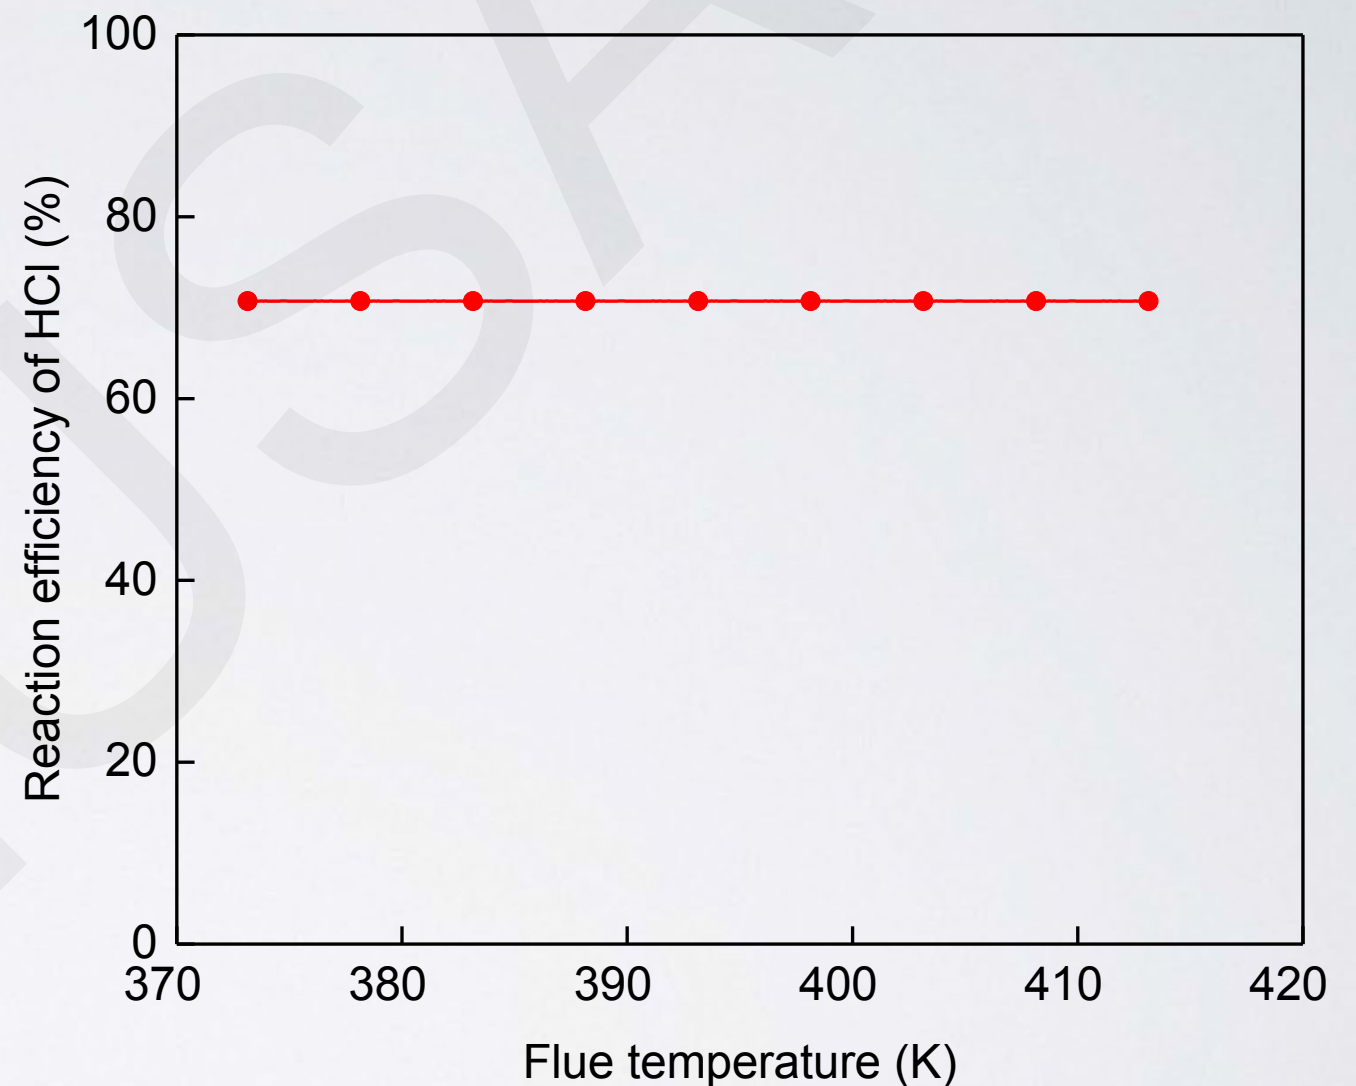

Experimental conditions: temperature, 393.15 K; reaction time, 1 second; Na/Cl, 5

Influence of reaction time on reaction efficiency of HCl

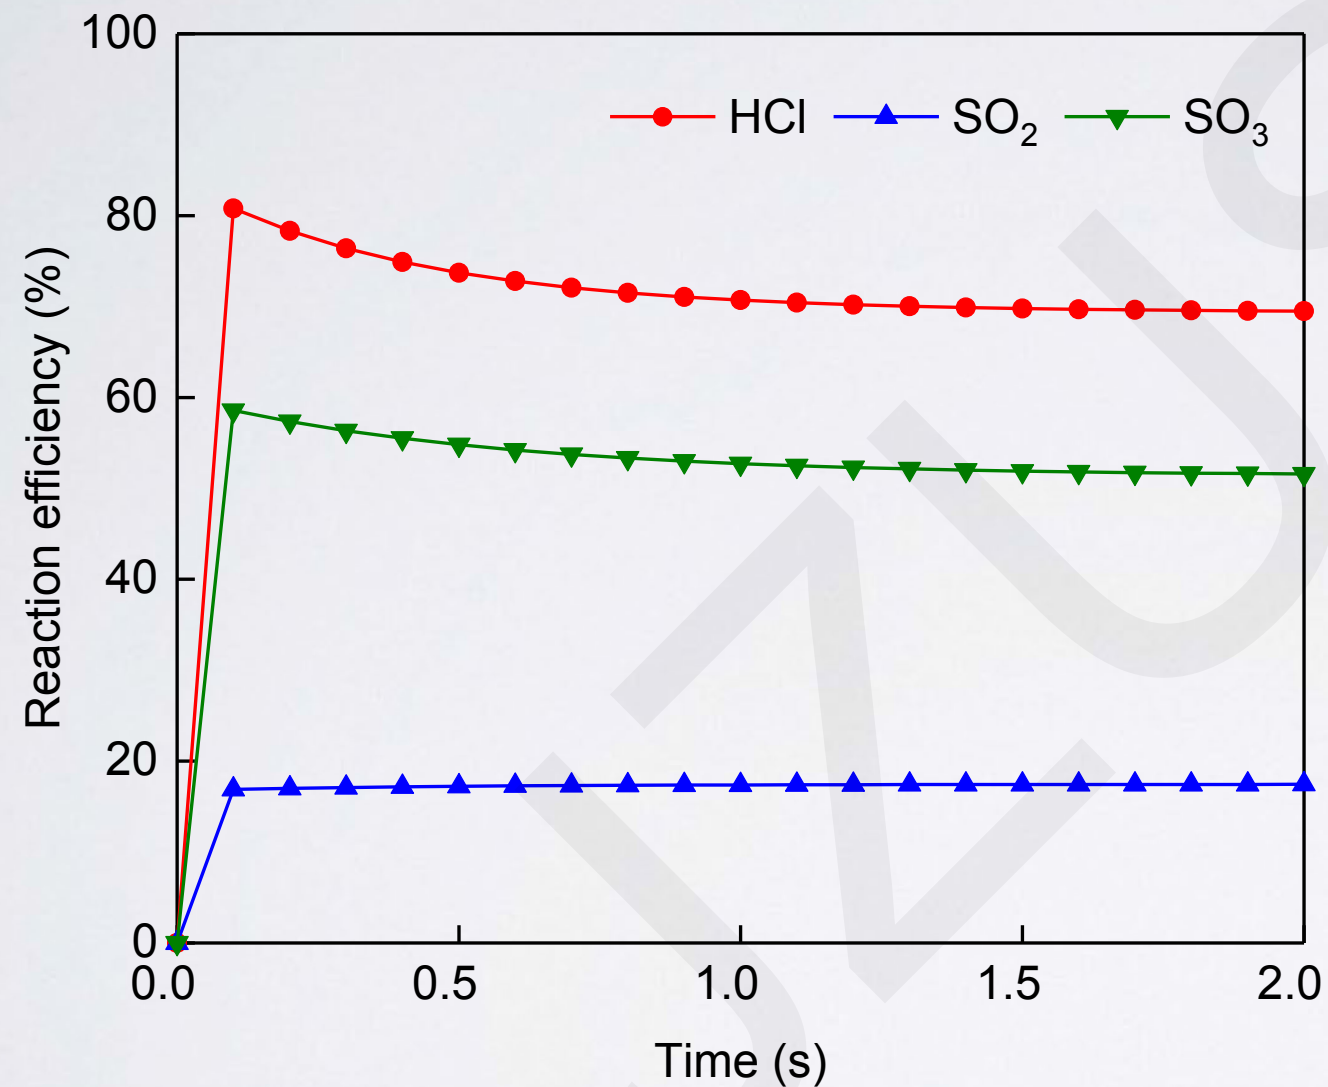

- The reactions among acid gases in flue gas with NaOH mainly finish within 0.1 second and reach equilibrium after 1 second.
- It is important in practice to select an appropriate position to spray alkali solution after air preheater to control reaction time.

Experimental conditions: temperature, 393.15 K; Na/Cl, 5