



Non-monotonic piezocone dissipation curves of backfills in a soil-bentonite slurry trench cutoff wall

Cite this as: Yu-chao Li, Xing Tong, Yun Chen, Han Ke, Yun-min Chen, Yi-duo Wen, Qian Pan, 2018. Non-monotonic piezocone dissipation curves of backfills in a soil-bentonite slurry trench cutoff wall. *Journal of Zhejiang University-SCIENCE A (Applied Physics & Engineering)*, 19(4):277-288.

<https://doi.org/10.1631/jzus.A1700097>

soil-bentonite slurry trench cutoff wall




■ Construction of a soil-bentonite cutoff wall

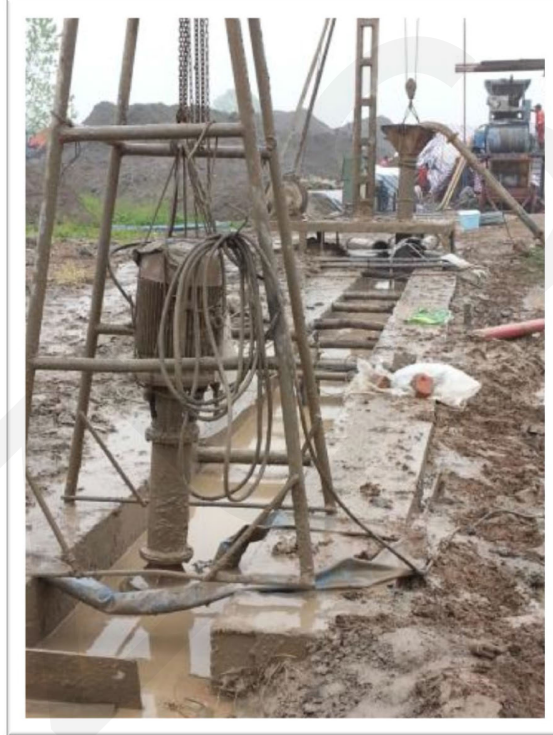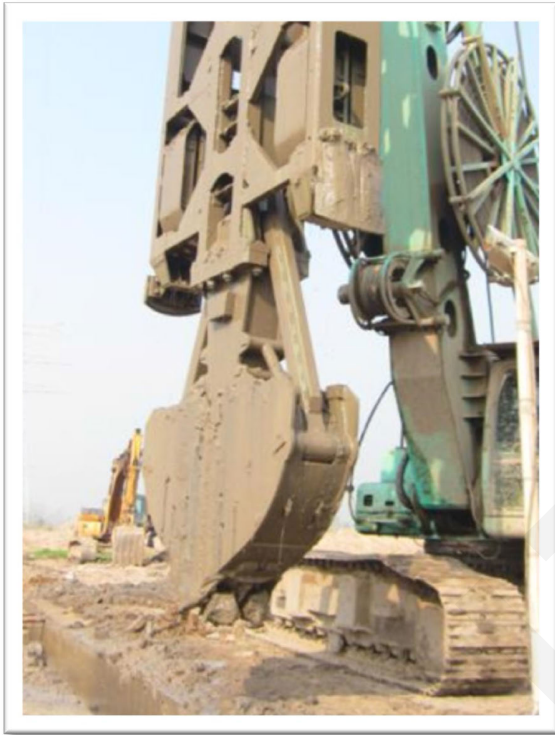

A soil-bentonite slurry trench cutoff wall with a length of 15 m, a width of 0.6 m and a depth of 10 m, was built in Jiangsu province in 2014.



CPTU Test

■ The peaks in the curves of q_t and f_s and the valleys in the curve of u_2 occur simultaneously.

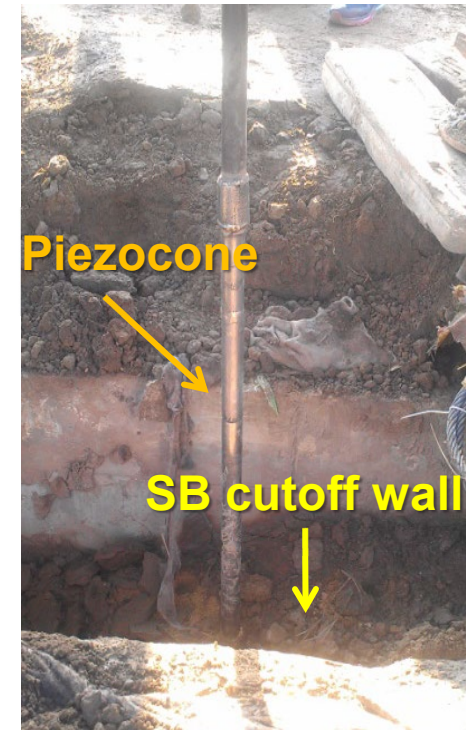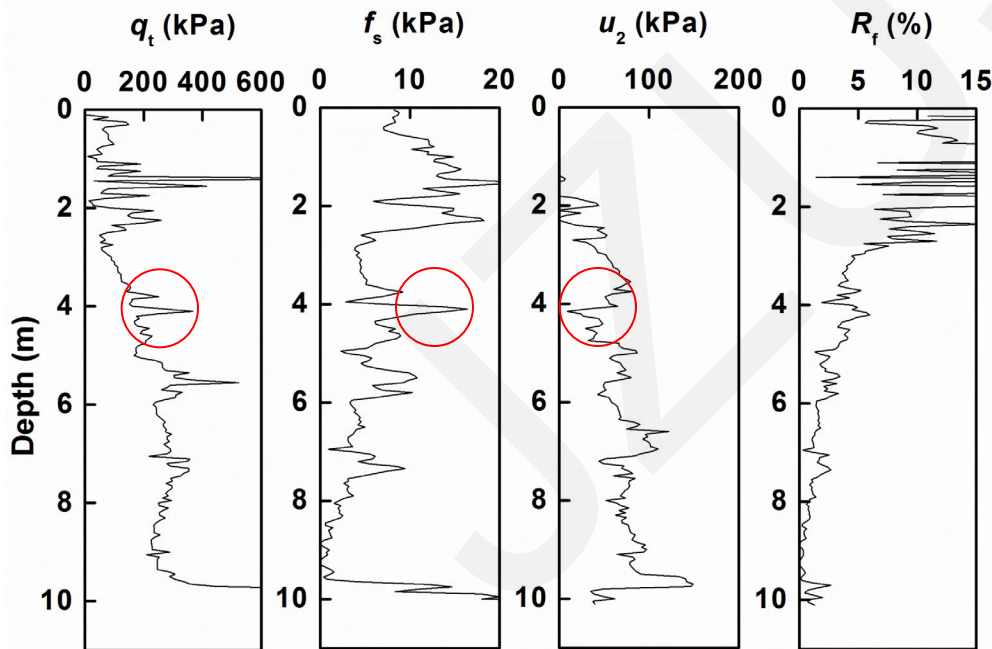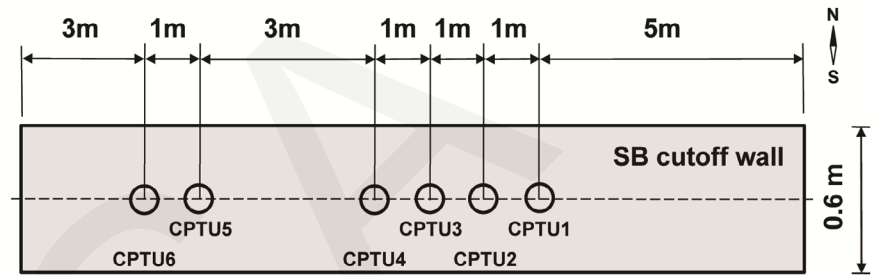


CPTU Test

- Non-monotonic dissipation curves were obtained during the pore pressure dissipation tests in SB cutoff walls.
- The mechanism is explained as the redistribution of excess pore pressure (u) near the piezocone.

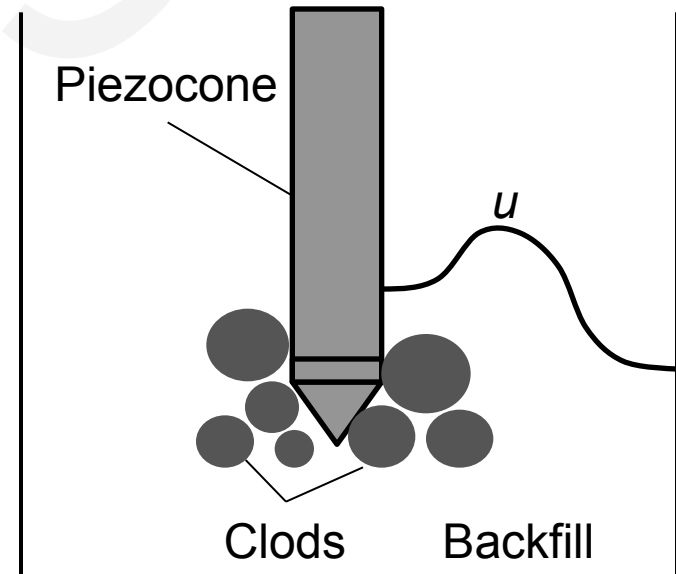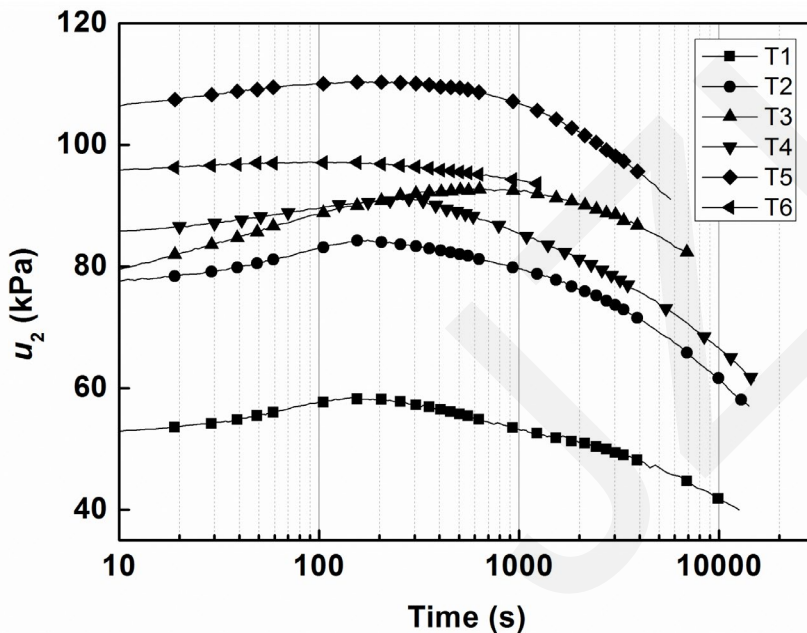


Existing methods

t_{50c}

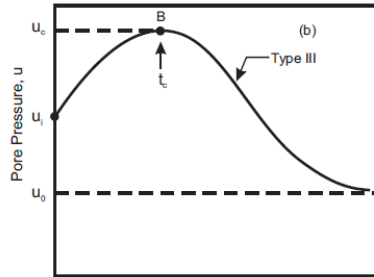

logarithm of time plot method

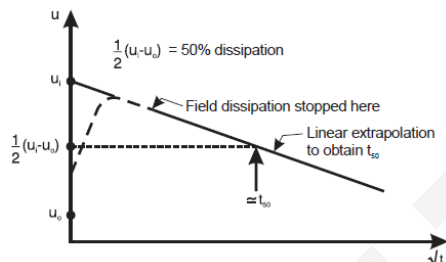

square root of time plot method

(Sully et al., 1999)

$$t_{50c} = \frac{t_{50}}{1 + 18.5 \left(\frac{t_{u \max}}{t_{50}} \right)^{0.67} \left(\frac{I_r}{200} \right)^{0.3}}$$

(Chai et al., 2012)



C_h

$$c_h = \frac{T^* r^2 \sqrt{I_r}}{t_{50}}$$

(Teh and Houlsby, 1991)

$$c_h = \frac{r^2 \left(r_p / r \right)^{1.25} T_{50}^*}{t_{50i}}$$

(Ha et al., 2014)



k_h

$$k_h = \frac{c_h \gamma_w}{E_s}$$

(Terzaghi et al., 1996)

$$k_h = \frac{\gamma_w}{2.3 \sigma'_{v0}} R_R c_h$$

(Baligh and Levadoux, 1980)

$$k_h = \left(251 t_{50} \right)^{-1.25}$$

(Parez and Fauriel, 1988)

$$k = \frac{1}{2.976 \beta e^{0.076 \beta}} \cdot \frac{K_D U r \gamma_w}{\sigma'_{v0}}$$

(Shen et al., 2015)

Comparison

t_{50c}/t_{i50} and c_h of SB backfills evaluated by four existing interpretation methods

| Test No. | Depth (m) | $t_{u\ max}$ (s) | Sully et al.'s method I# (1999) | | Sully et al.'s method II* (1999) | | Chai et al.'s method (2012) | | Ha et al.'s method (2014) | |
|----------|-----------|------------------|---------------------------------|----------------------------|----------------------------------|----------------------------|-----------------------------|----------------------------|---------------------------|----------------------------|
| | | | t (min) | c_h (cm ² /s) | t (min) | c_h (cm ² /s) | t (min) | c_h (cm ² /s) | t_{50i} (min) | c_h (cm ² /s) |
| T1 | 2.0 | 150 | 377.8 | 3.2×10^{-4} | 360.2 | 3.4×10^{-4} | 251.6 | 4.8×10^{-4} | 472.1 | 4.4×10^{-3} |
| T2 | 4.0 | 175 | 264.3 | 4.6×10^{-4} | 238.9 | 5.1×10^{-4} | 154.9 | 7.8×10^{-4} | 328.3 | 3.2×10^{-3} |
| T3 | 6.0 | 593 | 420.3 | 2.9×10^{-4} | 353.3 | 3.4×10^{-4} | 193.5 | 6.3×10^{-4} | 743.4 | 1.5×10^{-3} |
| T4 | 5.0 | 281 | 213.7 | 5.7×10^{-4} | 179.1 | 6.8×10^{-4} | 100.9 | 1.2×10^{-3} | 241.6 | 1.5×10^{-3} |
| T5 | 7.0 | 185 | 178.6 | 6.8×10^{-4} | 151.9 | 8.0×10^{-4} | 91.4 | 1.3×10^{-3} | 224.4 | 2.8×10^{-3} |
| T6 | 9.0 | 90 | 124.2 | 9.8×10^{-4} | 110.0 | 1.1×10^{-3} | 70.9 | 1.7×10^{-3} | 152.6 | 6.1×10^{-3} |

k_h estimated for SB backfills by four existing methods

| Depth (m) | k_h (cm/s) | | | |
|-----------|--------------------------------|-------------------------------------|-----------------------------------|-----------------------------|
| | Terzaghi et al's method (1996) | Baligh and Levadoux's method (1980) | Parez and Fauriel's method (1988) | Shen et al.'s method (2015) |
| 2.0 | 5.4×10^{-8} | 2.2×10^{-8} | 3.6×10^{-9} | 1.7×10^{-7} |
| 4.0 | 7.7×10^{-8} | 1.9×10^{-8} | 5.6×10^{-9} | 8.2×10^{-7} |
| 5.0 | 9.5×10^{-8} | 2.1×10^{-8} | 7.3×10^{-9} | 1.2×10^{-6} |
| 6.0 | 4.8×10^{-8} | 9.9×10^{-9} | 3.1×10^{-9} | 1.3×10^{-5} |
| 7.0 | 1.1×10^{-7} | 2.2×10^{-8} | 9.2×10^{-9} | 3.3×10^{-6} |
| 9.0 | 1.6×10^{-7} | 2.7×10^{-8} | 1.4×10^{-8} | 4.8×10^{-4} |

Conclusions

- The measured initial increase of pore pressure perhaps results from the redistribution of excess pore pressure around the cone which is affected by the ununiformity of the backfill.
- c_h obtained by the logarithm of time plot method and the square root of time plot method (Sully *et al.*, 1999) are close and in good agreement with the results of fixed-ring consolidometer tests.
- The relation of consolidation theory (Terzaghi *et al.*, 1996) gives k_h closest to the results of flexible wall permeameter tests.